


SPECIFICATION CONTROL DRAWING

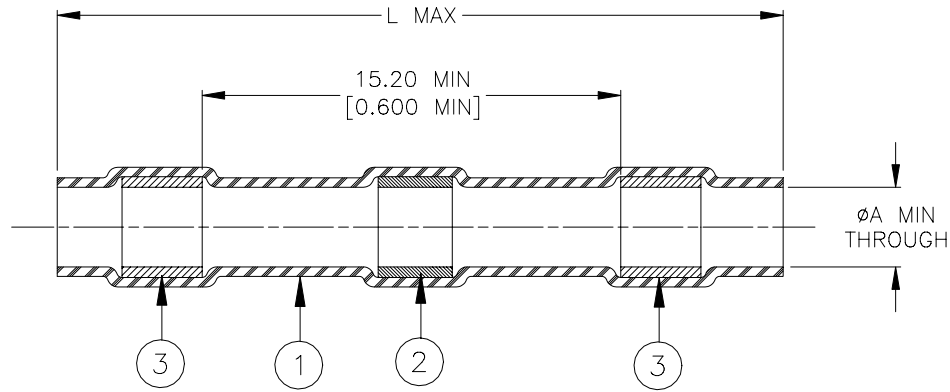

Product Revisions		Size Code Color Item 3	Product Dimensions		Conductor Dimensions		Selection Guide			
Product Names			L max	øA min	øB		Total mm²		Total CMA	
					min	max	min	max	min	max
B-152-9001	N/C	Clear	26.0 (1.025)	1.7 (.065)	0.4 (0.015)	1.7 (0.065)	0.3	0.8	450	1500
B-152-9002	N/C	Red	42.0 (1.655)	2.7 (0.105)	1.3 (0.050)	2.7 (0.105)	0.8	2.0	1250	3500
B-152-9003	N/C	Blue	42.0 (1.655)	4.5 (0.180)	1.8 (0.070)	4.5 (0.180)	2.0	4.0	2500	7200
B-152-9004	N/C	Yellow	42.0 (1.655)	6.0 (0.235)	2.8 (0.110)	6.0 (0.235)	4.0	6.0	6100	19000
B-152-9005	N/C	Gray	42.0 (1.655)	7.0 (0.275)	3.2 (0.125)	7.0 (0.275)	6.0	10.0	12000	25000


MATERIALS

1. INSULATION SLEEVE: Heat-shrinkable, radiation cross-linked modified polyolefin. Transparent clear. Marked: "B-152".
2. SOLDER PREFORM WITH FLUX:
SOLDER: TYPE Bi14 (Sn43Pb43Bi14A) per ANSI/J-STD-006.
FLUX: TYPE ROM1 per ANSI/J-STD-004.
3. MELTABLE RINGS: Thermally stabilized thermoplastic. Color: see table.

APPLICATION

1. These controlled soldering devices are designed to splice tin plated or bare copper stranded wires rated for at least +85°C.
2. Temperature range: -55°C to +125°C.
3. For installation procedure and application equipment consult RCPS-B152.

For best results, prepare the wire as shown:

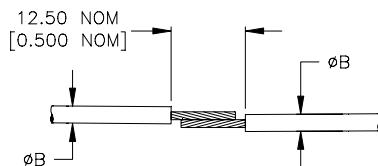

<div>tyco</div> <div>Electronics</div>		<div>Raychem</div> <div>305 Constitution Drive, Menlo Park, CA. 94025, USA</div>		<div>TITLE:</div> <div>SOLDERSLEEVE ONE STEP WIRE TERMINATOR LOW TEMPERATURE</div>							
<div>Unless otherwise specified dimensions are in millimeters. [Inches dimensions are shown in brackets]</div>				<div>DOCUMENT NO.:</div> <div>B-152-900X</div>							
<div>TOLERANCES:</div> <div>0.00 N/A 0.0 N/A 0 N/A</div>		<div>ANGLES: N/A</div> <div>ROUGHNESS IN MICRON</div>		<div>Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.</div>		<div>PROD. REV.:</div> <div>SEE TABLE</div>		<div>DOC. ISSUE:</div> <div>0</div>		<div>DATE:</div> <div>24-Apr-03</div>	
<div>PREPARED BY:</div> <div>mforonda</div>		<div>DCR NUMBER:</div> <div>D030214</div>		<div>REPLACES:</div> <div>----</div>		<div>SCALE:</div> <div>None</div>		<div>SIZE:</div> <div>A</div>		<div>SHEET:</div> <div>1 of 1</div>	

If this document is printed it becomes uncontrolled. Check for the latest revision.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[B-152-9003](#) [B-152-9004](#)