
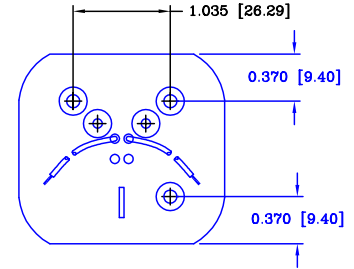
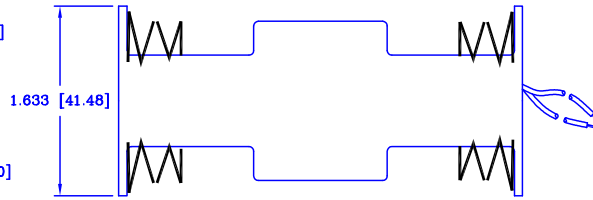



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
3/24/07	A	ADDED "ROHS COMPLIANT" UPDATED MATERIAL SPEC.	T.B.	B.S.	
5/05/07	B	UPDATED TOLERANCE AND TITLE BLOCK	T.B.	B.S.	

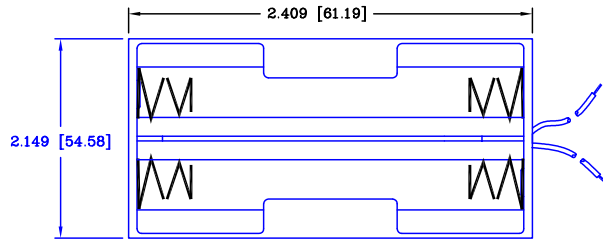


SPECIFICATIONS

Plastic material - Polypropylene, PP-1040
 Flammability Rating - UL94-HB, UL File NO. E216959
 Temperature Range: -10°C to +100°C
 Springs - Nickel Plated Spring Steel
 Wire - 26 AWG, UL1007, CSA
 Rivets - Brass, Nickel Plated
 9Volt Snaps - Brass, Nickel Plated
 Contact Resistance: Under 50mΩ for +/- contacts per EIA-540J000
 ROHS COMPLIANT

ORDERING CODE BH22C

- L- Solder Lugs
- W- (6") Wire Leads
- SF- 9Volt type snaps
- B- Bump plates

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal ± .020 (.5)	Scale 1=1	Drawn By	T.S.
Fractional ± .030 (.8)	Title FOUR "C" CELL HOLDER		
Angular ± 3°	Date 5/05/07	Drawing Number BH22CW	
		Approved By T.B.	