

Date	SYM	REVISION RECORD	AUTH	DR.	CK.
10/10/14	C	REDRAWN AND UPDATED TO ROHS 2 COMPLIANT	T.B.	B.S.	

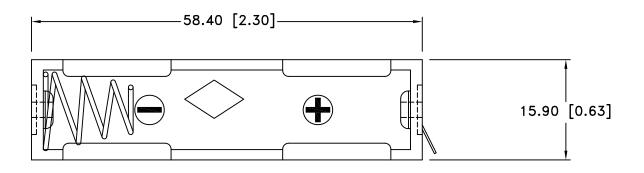

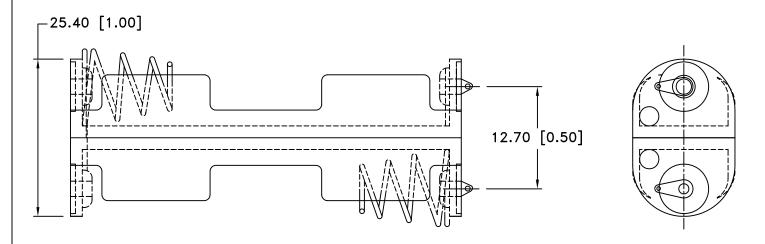

NOTES:

Plastic material - Polypropylene, PP-1040

Flammability Rating -UL94-HB, UL File NO. E216959

Temperature Range: -10°C to +100°C Springs - Nickel Plated Spring Steel

Rivets - Brass, Nickel Plated

9Volt Snaps - Brass, Nickel Plated

Contact Resistance: Under $50m\Omega$ for +/- contacts per EIA-540J000

ROHS 2 COMPLIANT

Tolerance	Memory Protection Devices, Inc							
(Except as noted)	200 Broad Hollow Road, Farmingdale, New York 11735							
decimal			Scale	Drawn By B.S.				
±.5 (.020)				Approved By T.B.				
Fractional	Title TWO "AA" CELL HOLDER WITH SOLDER LUGS							
± .8 (.030)								
Angular	Date	Drawing Number						
± 3°	10/10/14	BC22AAL						