



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
4/14/07	А	ADDED "ROHS COMPLIANT" UPDATED MATERIAL SPEC.	T.B.	B.S.	
5/05/07	В	UPDATED TOLERANCE AND TITLE BLOCK	T.B.	B.S.	
8/06/14	С	UPDATED TO ROHS 2 COMPLIANT	T.B.	B.S.	

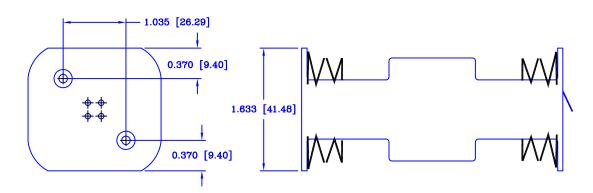



SPECIFICATIONS

Plastic material - Polypropylene, PP-1040 Flammability Rating -UL94-HB, UL File NO. E216959 Temperature Range: -10°C to +100°C Springs - Nickel Plated Spring Steel Rivets - Brass, Nickel Plated 9Volt Snaps - Brass, Nickel Plated Contact Resistance: Under $50m\Omega$ for +/- contacts per EIA-540J000 ROHS 2 COMPLIANT

Tolerance (Except as noted)	MPD Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735						
decimal			Scale	Drawn By T.S.			
±.5 (.020)			1=1	Approved By T.B.			
Fractional ± .8 (.030)	Title FOUR "C" CELL HOLDER WITH SOLDER LUGS						
Angular	Date Drawing Number						
± 3°	8/06/14	BH22CL					