



COMMON MODE CHOKE FOR ADSL AND VDSL



-  Common Mode Chokes for use in ADSL and VDSL applications
-  Ideal for high frequency DSL applications

Electrical Specifications @ 25°C — Operating Temperature -40°C to 85°C



RoHS-5 Compliant Part Number	RoHS-6 Compliant Part Number	Turns Ratio	Inductance (each winding) (mH)	Isolation Voltage (Vrms)
BX8213	BX8213NL	1:1	9.0	500

NOTE: Parts are shipped in trays unless Tape & Reel packaging is specified by adding the suffix "T" to the part number (i.e. BX8213T).


Mechanical

Schematic

BX8213 / BX8213NL

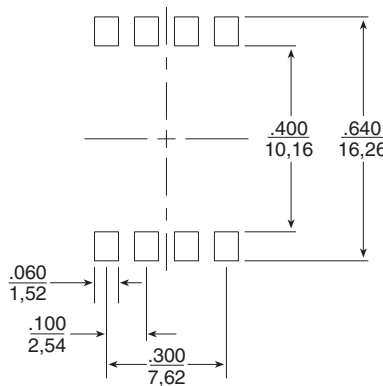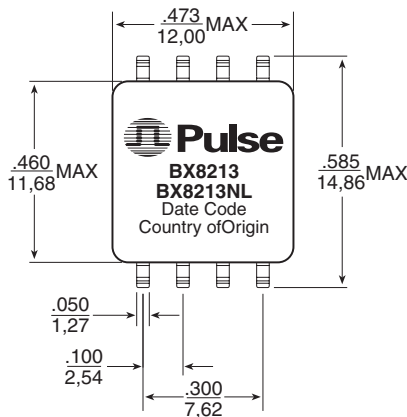


SUGGESTED PAD LAYOUT



Weight2.0 grams
Tape & Reel250/reel
Tube40/tube

Dimensions: Inches
mm

Unless otherwise specified,
all tolerances are $\pm \frac{.010}{0,25}$

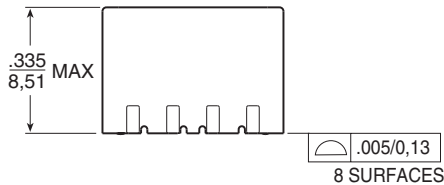

For More Information:

Pulse Worldwide Headquarters
12220 World Trade Dr.
San Diego, CA 92128
U.S.A.
www.pulseeng.com
TEL: 858 674 8100
FAX: 858 674 8262

Pulse Europe
Einsteinstrasse 1
D-71083 Herrenberg
Germany
Tel: 49 7032 7806 116
Fax: 49 7032 7806 135

Pulse China Headquarters
No. 1
Industrial District
Changan, Dongguan
China
Tel: 86 769 85538070
Fax: 86 769 85538870

Pulse North China
Room 1503
XinYin Building
No. 888 YiShan Rd.
Shanghai 200233
China
Tel: 86 21 54643211/2
Fax: 86 21 54643210

Pulse South Asia
150 Kampong Ampat
#07-01/02
KA Centre
Singapore 368324
Tel: 65 6287 8998
Fax: 65 6280 0080

Pulse North Asia
No. 26
Kao Ching Rd.
Yang Mei Chen
Taoyuan Hsien
Taiwan, R. O. C.
Tel: 886 3 4641811
Fax: 886 3 4641911

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners.

© Copyright, 2006. Pulse Engineering, Inc. All rights reserved.

www.pulseeng.com

B830.A (8/06)