

LED tunnel light/ LED flood light/ LED canopy light YR-TL300-W150



1.Applications

Factory ,warehouse ,tunnel ,stadium etc

2. Features

- 1)Instant light
- 2)Easy to maintain ,easy to upgrade
- 3)120lm/w Philips led chip
- 4) Unique design for power supply box
- 5) Adjustable bracket.
- 6) Beautiful appearance


3.Specifications

- 1)Color temperature :5000K (Available in all color temperatures)
- 2) CRI>70
- 3)Housing material: Die cast Aluminum


- 4)Voltage: Universal range :90-265VAC
- 5) LM/W:85-90LM/W
- 6)Life time to 70% Luminous flux: 60,000 hours

4. Dimensional drawing


YR-TL300-150

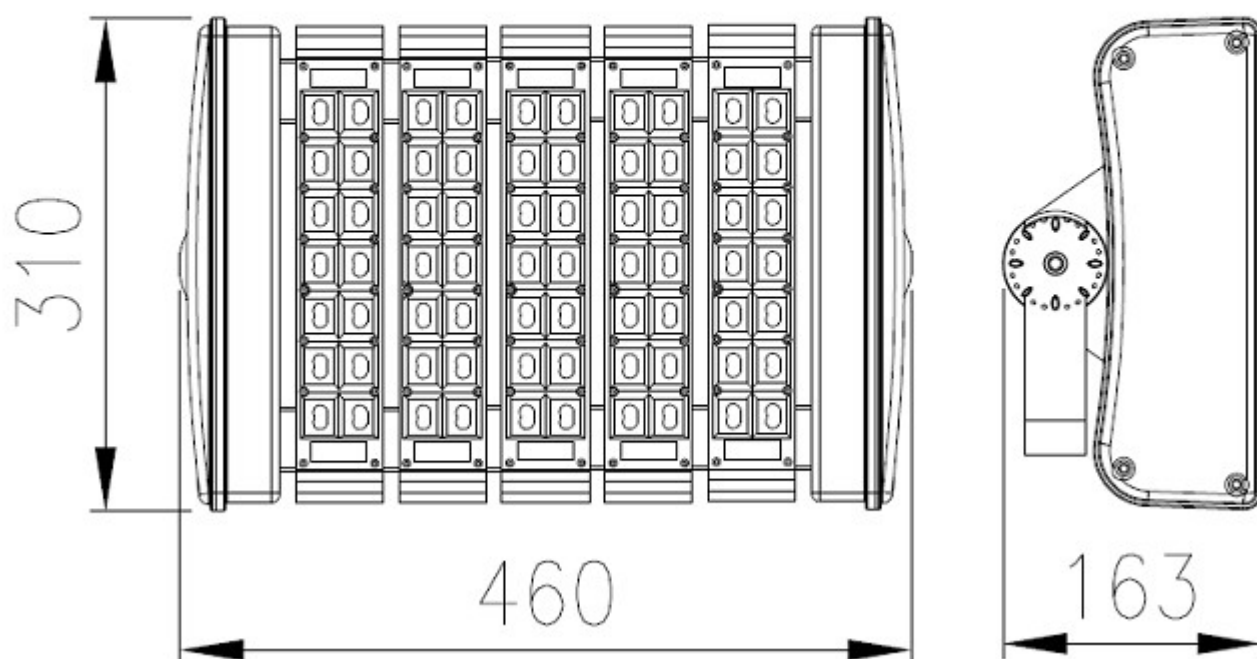

5.

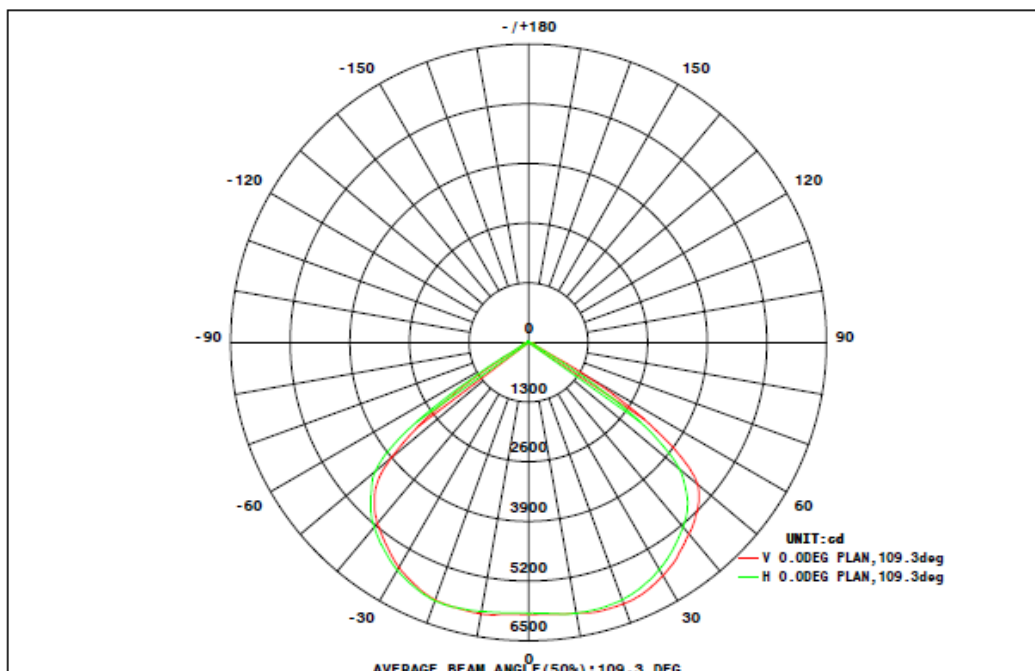


Flux out:13685 lm

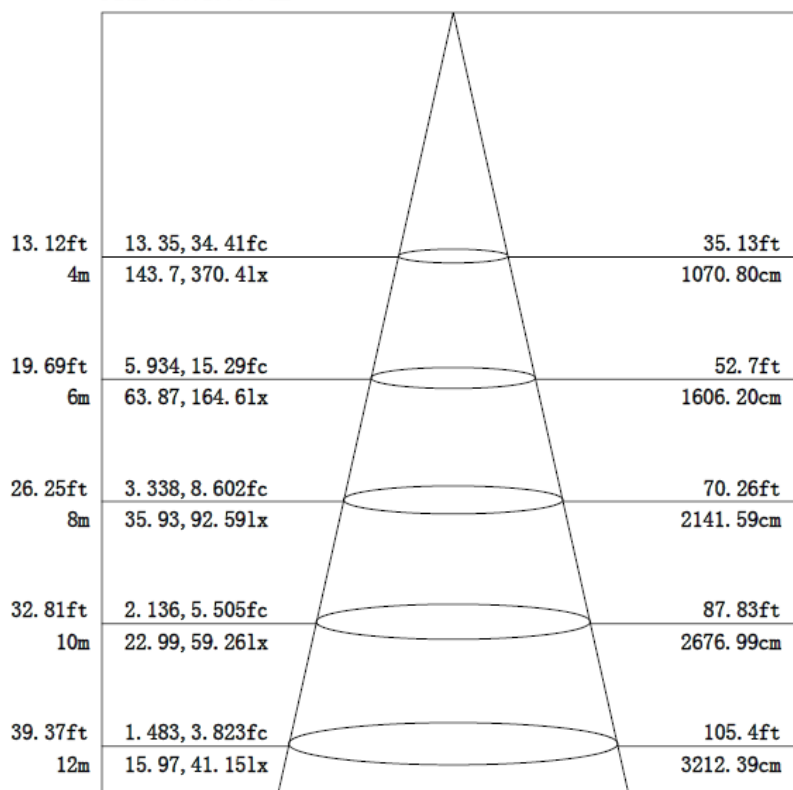


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

6. Installation instruction


1. Use M10 screw to fix the lamps on a suitable place.
2. Connect the wires
3. Adjust the bracket to a suitable place ,tighten the screws then after

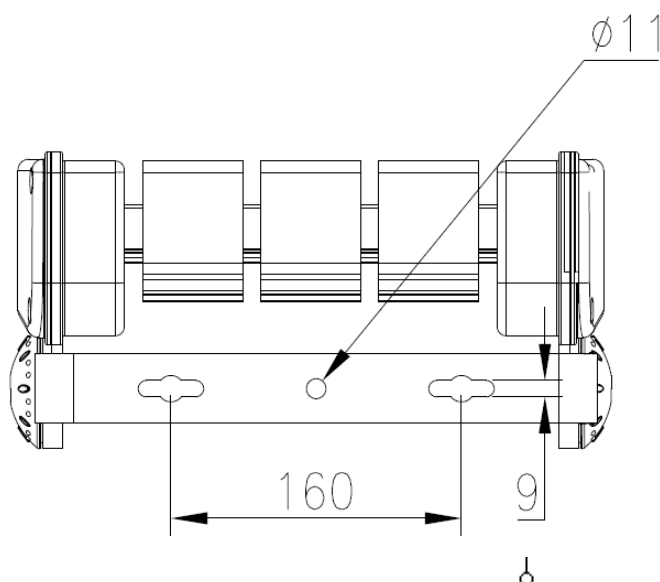

Brown wire connects with Live wire

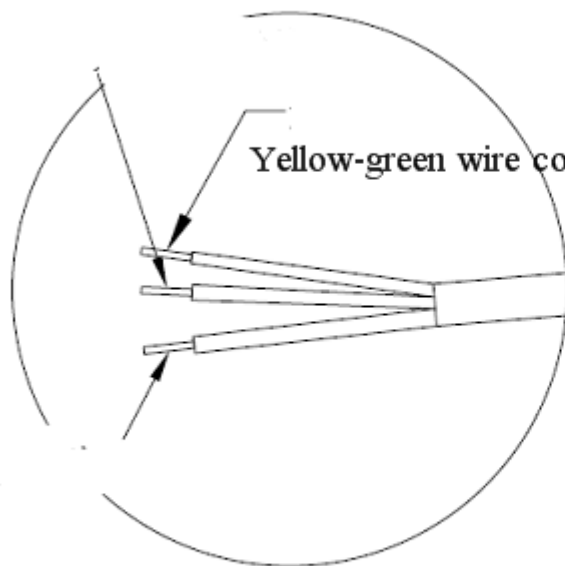


tighten the screw after adjusting the bracket

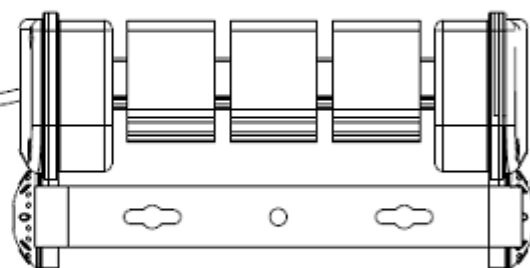

Blue wire connects with Neutral wire

7. Packaging

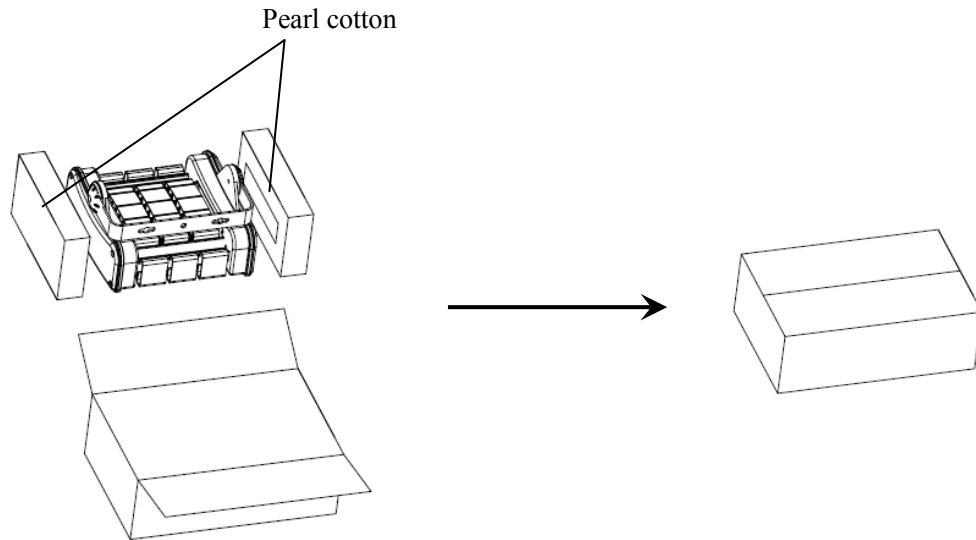

8. Attention

- Cut off the power and make sure the installing place can burden the weight of the lamp
- Make sure the lamp correctly installed, in case of the lamp's dropping down
- Do not use the lamp in the area with aggressive gas.
- Do not cover the lamp with anything which is harm for heat dissipation.
- Be careful and connect the ground line well.
- Guarantee 5 years.
- Products faults caused by separating, remodeling or incorrectly construction are not in the warranty area.