



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

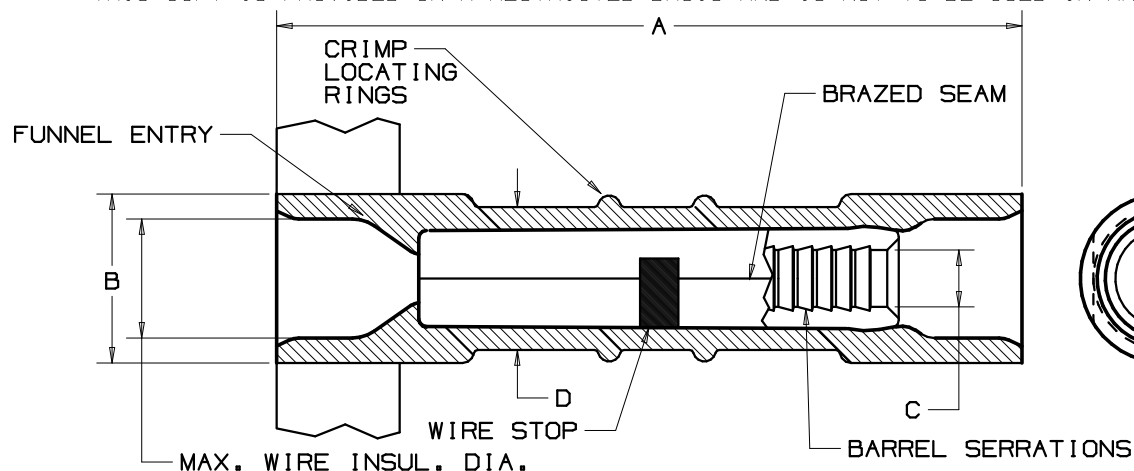


NOTES:

1. 600V MAX VOLTAGE RATING
2. MAXIMUM TEMPERATURE RATING:
BSN SERIES=125°C (257°F)
BSP SERIES=105°C (221°F)
3. SOLID OR STRANDED COPPER WIRE
4. CONTINUOUS MOLDED STRIP CARRIER
5. DIMENSIONS IN BRACKETS ARE IN INCHES
6. PKG. QTY: 3K=3000 PCS. 2K=2000 PCS
7. MATERIAL: A. HOUSING-NYLON
B. STAMPING-
CDA #110 COPPER, .81 (.032) THICK
8. WIRE STRIP LENGTH 7,9⁺₀⁸ (5/16⁺₀^{1/32})
9. UL LISTED AND CSA CERTIFIED WITH AWG WIRE ONLY

		PANDUIT PRESS					
		CP-851 <i>DISCONTINUED</i>	CP-860 <i>DISCONTINUED</i>	CP-861	CP-862	CP-871 60HZ	CP-871/E 50HZ
APPLICATORS	CA-800		X	X			
	CA-800EZ	X				X	X
	CA9				X	X	X



PART NUMBER	WIRE RANGE mm ² (AWG)	COLOR CODE	MAX. WIRE INSUL. DIA.	MIN. WIRE INSUL. DIA.	DIMENSIONS mm				HAND TOOLS
					A	B	C	D	
BSMN1-3K BSMP1-3K	.5-1.5 (22-16)	RED	3.8 (.15)	N/A	24.1 (.95)	5.5 (.22)	1.3 (.05) MIN.	4.7 (.18)	CT-1551M
BSMN2-3K BSMP2-3K	1.5-2.5 (18-14)	BLUE	4.3 (.17)	N/A	24.1 (.95)	6.0 (.24)	1.9 (.07) MIN.	5.4 (.21)	CT-1551M
BSMN6-2K	4.0-6.0 (12-10)	YELLOW	5.8 (.23)	N/A	24.1 (.95)	8.1 (.32)	3.0 (.12) MIN.	7.4 (.29)	CT-1551M



A41619-02

02	3/06	DAW	DAW	ADDED PANDUIT PRESS & APPLICATOR CHART	TR00083			PANDUIT CORP. TINLEY PARK, ILLINOIS METRIC CONTINUOUSLY MOLDED STANDARD AND PREMIUM NYLON INSULATED TERMO BUTT SPLICES	
01	3/98	TM	JW	ADDED BSMN6-2K	06691	LA	DBH		
00	9/97	JKD	WB	RELEASED	06193	LA	DBH		
REV	DATE	BY	CHK	DESCRIPTION	ECN #	CUST	PM	DRAWN BY T SMA	CHK'D SCALE NONE DRAWING NO. A41619