
				DIMENSIONS ARE IN MILLIMETERS TOLERANCE UNLESS	JKL COMPONENTS CORPORATION					ΓΙΟΝ		
			THIRD ANGLE	OTHERWISE SPECIFIED 1 PL +/- 0 2 PL +/- 0 ANGLE +/- 0	TITLE			RE COLI SCENT L		HODE		
	DIM LINE CORRECT. AND 240+/-5.0 TO 240+/-3.0	10/17/00	DRAWN BY L. WENGSTROM	APPV'D BY DATE FD 10/17/00	SIZE	FSCM NO. 55335	DRAWIN NO.		2624	0-24B		
REV. NO.	RELEASED	5/22/00 APPV'D DATE	- CAD D		SCALE	NONE	RELEAS		REVISIO		REV. NO. A	sheet 1 _{of} 1

* RATED LIFE IS DEFINED AS THE POINT AT WHICH THE INTENSITY BECOMES 50% OF THE INITIAL RATING.

JKL LAMP PART NUMBER	COLOR	STARTING CIRCUIT VOLTAGE VS (Vrms)	OPERATING LAMP VOLTAGE VL (Vrms)	OPERATING LAMP CURRENT IL (mArms)	BRIGHTNESS (CANDELA/m2)	*RATED LIFE (HRS)
BF26240-24B	LCD HIGH OUTPUT WHITE 11000°k RGB	1250 @ 0°C	505	5	30,000 ± 10%	20,000

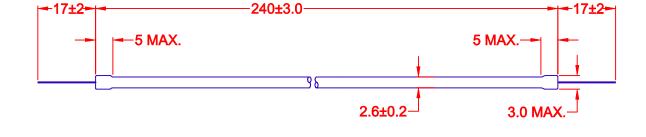

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

JKL Components: BF26240-24B