BGF108

7 Channel LCD Filter Array with ESD Protection

Small Signal Discretes



Edition 2007-12-10

Published by Infineon Technologies AG 81726 München, Germany © Infineon Technologies AG 2007. All Rights Reserved.

Legal Disclaimer

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenheitsgarantie"). With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

Information

For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office (www.infineon.com).

Warnings

Due to technical requirements components may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies Office.

Infineon Technologies Components may only be used in life-support devices or systems with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body, or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.



BGF108

Revision History: 2007-12-10, V2.0

Previous Version: 2006-12-14, V1.4


Page	Subjects (major changes since last revision)				
All	Preliminary status removed				
5	Table 1 and Table 2 updated				
6	Line capacitance, Insertion Loss and Analog Cross Talk curves updated				
7	Package and tape drawing updated				



7 Channel LCD Filter Array with ESD Protection

Feature

- 7 channel integrated RC filter array
- ESD protection according to IEC61000-4-2 up to 15 kV contact discharge on all IOs
- Wafer Level Package with SnAgCu solder balls
- 400 µm solder ball pitch
- RoHS and WEEE compliant package



WLP-18-1-N-3D



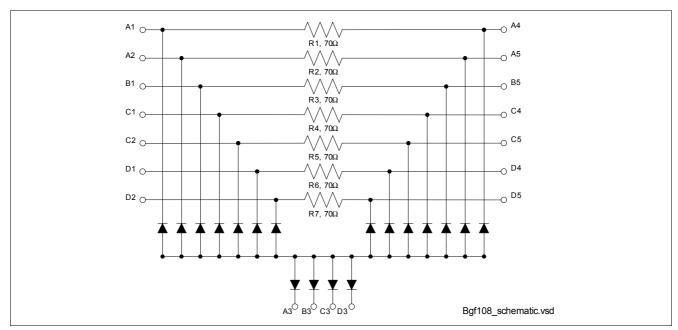


Figure 1 Schematic

Description

The BGF108 is a 7 channel RC filter array to provide EMI attenuation of undesired signals in the 800 - 2000 MHz range. All pins are protected against ESD up to 15 kV according to IEC61000-4-2 (contact discharge). The wafer level package is a green package with a size of only 1.68 mm x 2.02 mm and a total height of 0.60 mm.

Туре	Package	Marking	Chip
BGF108	WLP-18-1	BGF108	N0715



Table 1 Maximum Ratings

Parameter	Symbol	Values			Unit	Note /
		Min.	Тур.	Max.		Test Condition
Voltage at all pins to GND	V_{P}	0		5	V	
Operating temperature range	T_{OP}	-40		+85	°C	
Storage temperature range	T_{STG}	-65		+150	°C	
Summed up input power for all pins	P_{IN}			60	mW	T _S < 70 °C
Electrostatic discharge according to IEC61000-4-2 ¹⁾ at all pins	V_{E}	-15		15	kV	

¹⁾ Contact discharge

Table 2 Electrical Characteristics¹⁾

Parameter	Symbol	Values			Unit	Note /
		Min.	Тур.	Max.		Test Condition
Series Resistors R_1R_{10}	R	56	70	84	Ω	
Leakage current of each line to GND	I_{R}		1 2	100 1000	nA	$V_{\rm R}$ = 3 V $V_{\rm R}$ = 5 V
Breakdown voltage of each line to GND	$V_{(BR)}$	7	8.2		V	$I_{(BR)}$ = 1 mA
Line capacitance of each line to GND	C_{T}		27 17	30	pF	$V_{R} = 0 \text{ V}$ $V_{R} = 3 \text{ V}$

¹⁾ at T_A = 25 °C

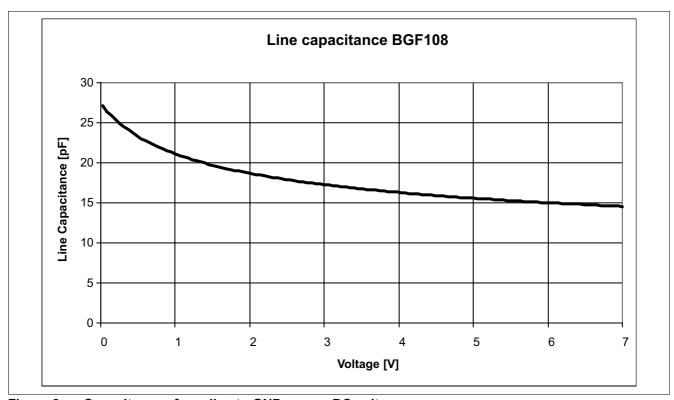


Figure 2 Capacitance of one line to GND versus DC voltage



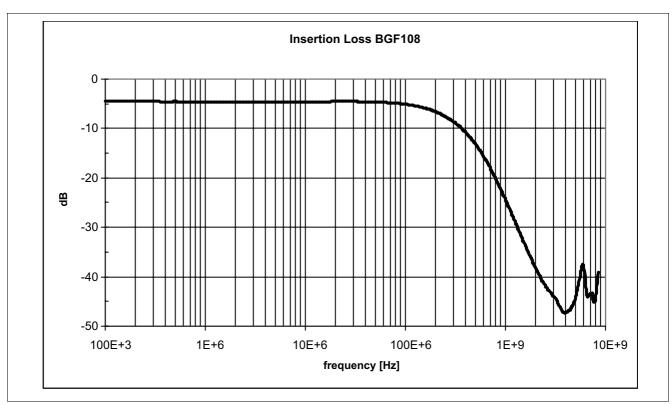


Figure 3 Typical filter characteristics of on channel ($Z_{\rm S}$ = $Z_{\rm L}$ = 50 Ω , $V_{\rm R}$ = 0 V)

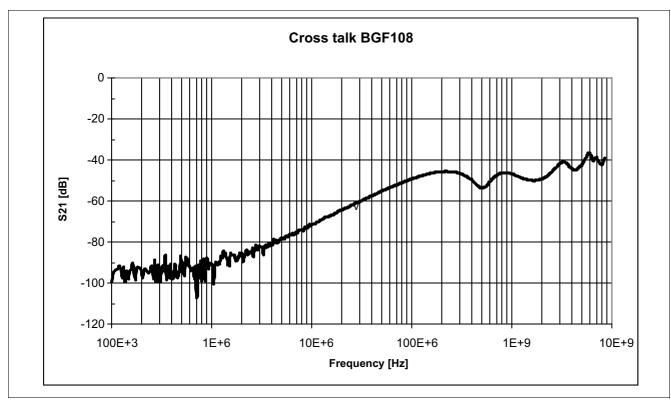


Figure 4 Typical cross talk between two channels ($Z_{\rm S}$ = $Z_{\rm L}$ = 50 Ω , $V_{\rm R}$ = 0 V)



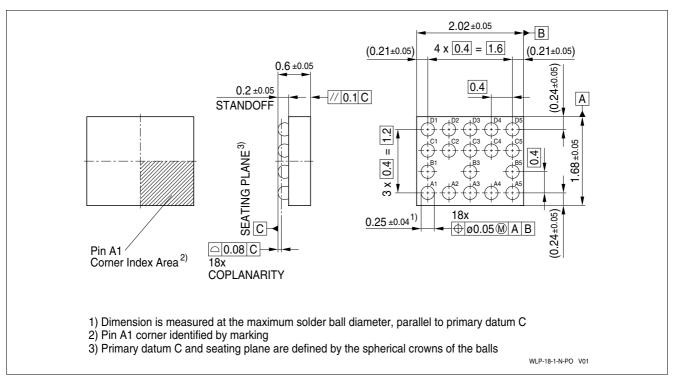


Figure 5 Package WLP-18-1

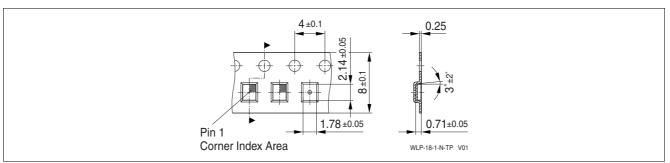


Figure 6 Tape of WLP-18-1