



LFC Series 0.155" (3.95mm) Low Profile, Diffused Rigid Light Pipe



LFC Series litepipe™ features diffused round 5mm surface for super wide viewing angle at 120 degrees


Applications

- audio/video
- communication
- darkroom equipment
- electrical panels
- entertainment
- industrial
- medical
- night vision equipment
- security
- studio control
- transportation

Key features

- wide viewing angle at 120 degrees
- low profile, flush panel design
- easy to assemble and remove
- optical grade polycarbonate for maximum light transmission
- standard lengths of 0.125" to 1.000"
- custom lengths available
- for high vibration applications, use RTN 125 retainer
- press fit (front) easy installation
- frosted surface diffuses light and provides uniform brightness and wide viewing angle



Dimensions

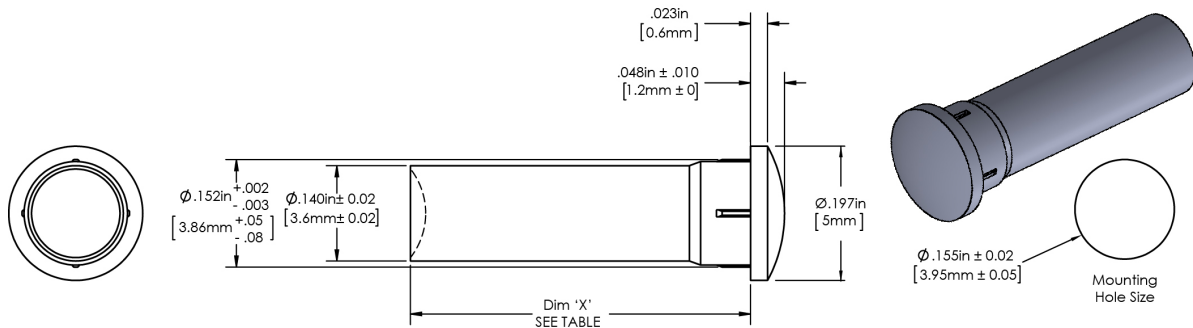

Accessory options

RTN 125 (order separately)

The RTN 125 securely and uniformly positions light pipe to panel



RTN 125
See data sheet:
Retainer 0.24" (6.10mm)

Product specifications

Materials	
light pipe	Polycarbonate, clear, UL 94-V0

Installation specification	
mounting hole	.155"±.020 (3.95mm±.05)
min. panel thickness	.040" (1.016mm)

Ordering data

LFC Series litepipe
ordering code (example)

LFC XXX CTP

Code XXX	Dim 'X'
012	0.125" (3.2mm)
025	0.250" (6.4mm)
035	0.350" (8.9mm)
037	0.375" (9.5mm)
050	0.500" (12.7mm)
063	0.625" (15.9mm)
075	0.750" (19.0mm)
100	1.000" (25.4mm)

Compliance

