


TECHNICAL SPECIFICATIONS

- Material:** UL 94 V-0 plastic material
- Operating Temperature:** -30°C to 90°C
- Cable Entry:** Side/Top/Side
- Thumbscrews:** UNC 4-40 (standard)
M2,5 or M3,0 on request
- Cable Diameter:** Up to 11,5 mm
- Accessories:** See page 40-43

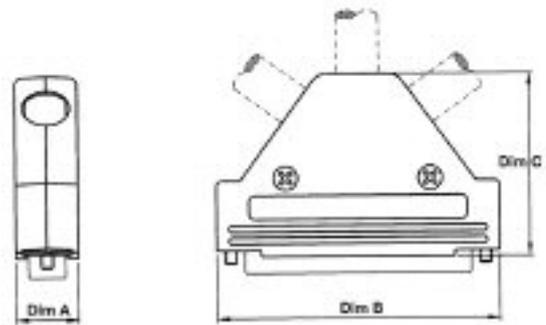

Features:

- Available in sizes 9-15-25-37
- All sizes feature 3-way entry solution
- Re-openable
- Hood is supplied with 2 blanking plates and 2 strain relief clamps. Extra blanking plates and/or strain reliefs are available on request.
- Also available in shielded version.
(See MHTRI-M-Series, page 16)

Size MHTRI-P	Dim A	Dim B	Dim C
9-way	15,0	31,0	45,2
15-way	15,0	40,3	45,2
25-way	15,0	53,5	45,2
37-way	15,0	70,0	45,2

Order Code


MHTRI-P XX - K

Series: _____

Size (xx): 09, 15, 25, 37 _____

Packaging Style: _____

K = Kit

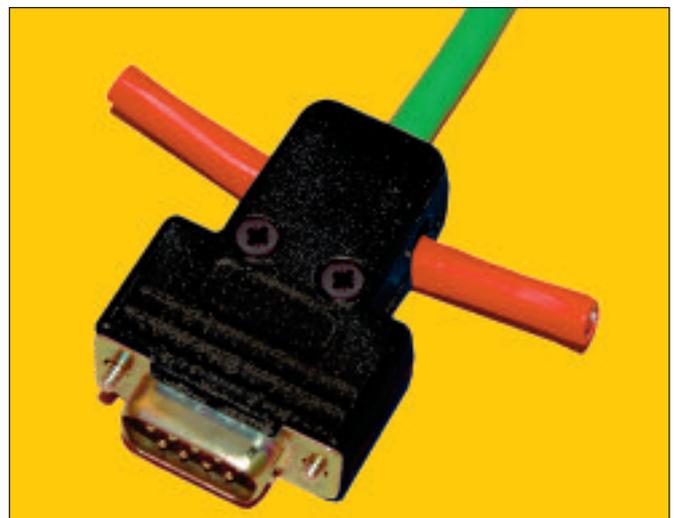


TECHNICAL SPECIFICATIONS

Material: UL 94 V-0 plastic material
Operating Temperature: -30°C to 90°C
Cable Entry: Side/Top/Side
Thumbscrews: UNC 4-40 (standard)
 M2,5 or M3,0 on request
Cable Diameter: Up to 11,5 mm



Features:

- Available in sizes 9-15-25-37
- All sizes feature 3-way entry solution
- Re-openable
- Hood is supplied with 2 blanking plates and 2 strain relief clamps. Extra blanking plates and/or strain reliefs are available on request.
- Also available in Unshielded version (see MHTRI-P, page 8)

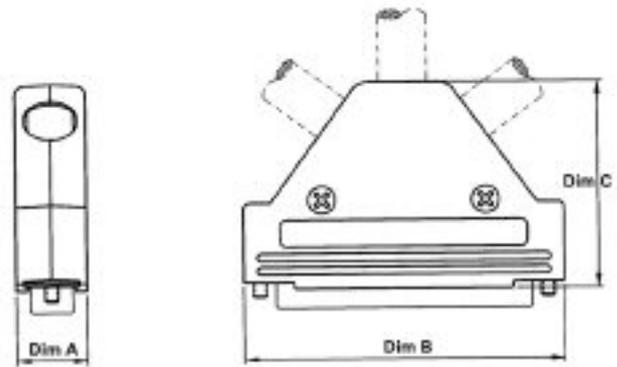

Size MHTRI-M	Dim A	Dim B	Dim C
9-way	15,0	31,0	45,2
15-way	15,0	40,3	45,2
25-way	15,0	53,5	45,2
37-way	15,0	70,0	45,2

Order Code

MHTRI-M XX - K

Series: _____

Size (xx): 09, 15, 25, 37 _____

Packaging Style: _____

K = Kit

