Sealed Sub-Miniature Pushbutton Switch



RoHS Compliant



Specifications:

Contact Rating : 0.4 Volt - Amps (VA) max. @ 20V max. (AC or DC)

Mechanical Life : 50,000 make-and-break cycles Contact Resistance : $20m\Omega$ max. initial @ 2-4V DC

100mA for both silver and gold plated contacts

Insulation Resistance : 1,000M Ω min.

Dielectric Strength : 1,000Vrms min.@sea level

Operating Temperature : -30°C to 85°C

Materials

Case & Bushing : Glass filled nylon 6/6, flame retardand, heat stabilized Plunger : Thermoplastic Polyester, with internal O-ring seal

Switch Support : Brass or steel electrotin plated Contact : Copper alloy, with gold plated

Switch Function


No. Poles	Model No.	Switch Function		Connected Terminals / Schematic	
		Pos. 1	Pos. 2	Pos. 1	Pos. 2
		4	4		
SP	MC8AS9	Off	Momentary	Open	1-3 1 T T 3

Pole Options


VS2




SPST



Part No. Shown: MC8AS9P1A1VS2RES






Dimensions: Inches (Millimetres)


www.element14.com www.farnell.com www.newark.com



Sealed Sub-MiniaturePushbutton Switch



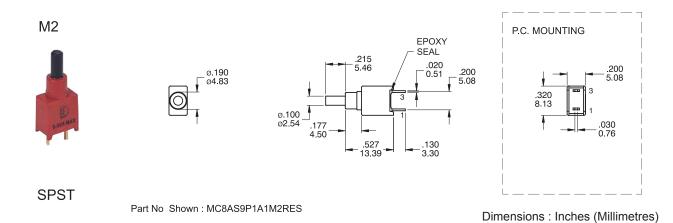

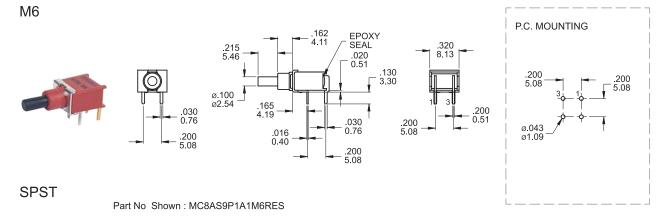

Dimensions: Inches (Millimetres)

Soldering Processes

Manual Soldering : Use soldering iron of 30 watts, controlled at 350°C

approximately 5 seconds while applying solder.

Wave Soldering : Recommended Soldering Temperature: 260 ± 5°C


Duration of Solder Immersion: Max 5 sec. (PCB is 1.6mm in thickness)

Page <2>

Sealed Sub-MiniaturePushbutton Switch



Ordering Information

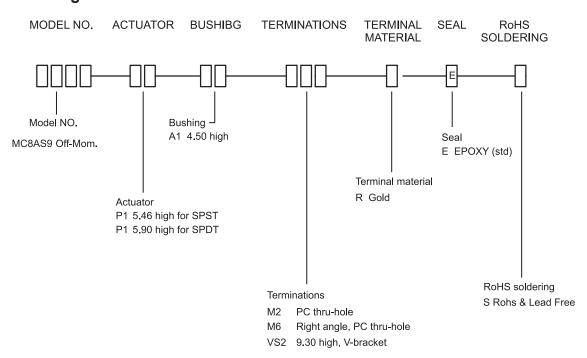

Part Number Table

Description	Part Number	
Switch, SPST, 0.4VA, 20V, THT	MC8AS9P1A1VS2RES	
Switch, SPST, OFF-MOM, R/A, Sealed	MC8AS9P1A1M2RES	
Switch, SPST, OFF-MOM, Bracket, Sealed	MC8AS9P1A1M6RES	

Important Notice: This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2012.

www.element14.com www.farnell.com www.newark.com

