



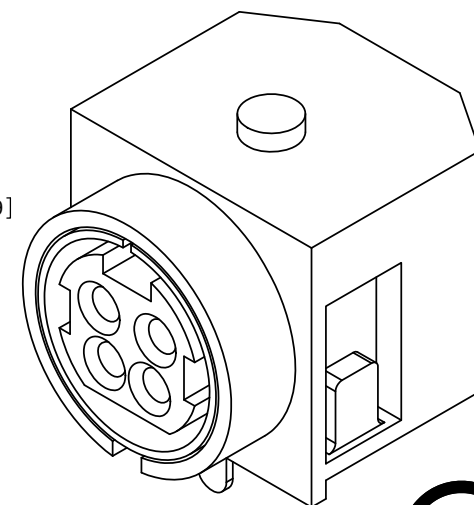

TOLERANCE:
±0.2mm UNLESS OTHERWISE
SPECIFIED

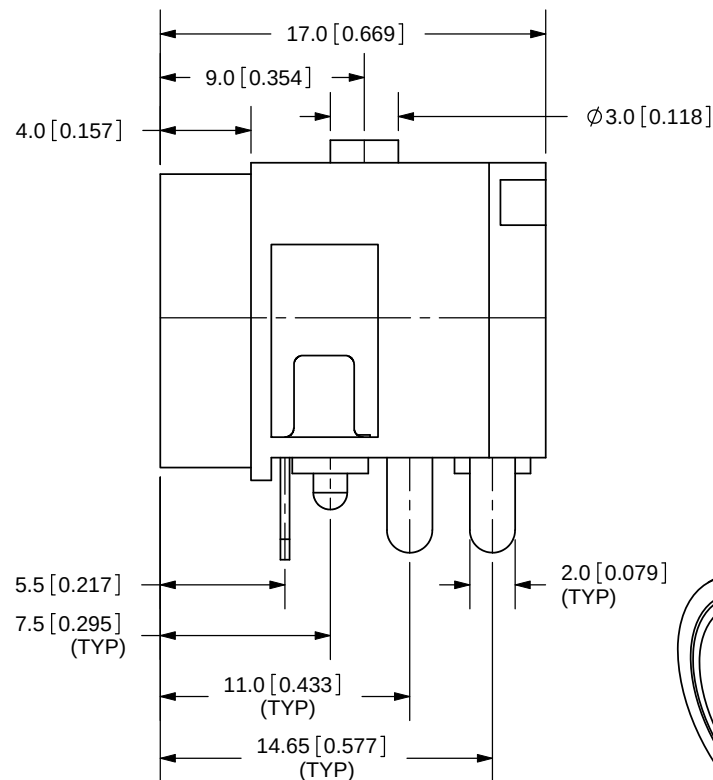

CUI INC

20050 SW 112th Ave.
Tualatin, OR 97062
Phone: 503-612-2300
800-275-4899
Fax: 503-612-2383
Website: www.cui.com

TITLE: 4-PIN POWER DIN JACK, RIGHT ANGLE,
NO SHIELDING

REV:	B
------	---

PART NO.	PD-40
----------	-------

UNITS:	MM [INCHES]
--------	-------------

DRAWN BY:
ZR

APPROVED BY:

SCALE:
3:1

SPECIFICATIONS:
RATING: 20V DC@ 7.5A
CONTACT RESISTANCE: 30m OHMS MAX
INSULATION RESISTANCE: 50M OHMS MIN: 250V DC
VOLTAGE WITHSTAND: 250V AC R.M.S. FOR 1 MINUTE
INSERTION FORCE: 6.0KG MAX
WITHDRAWAL FORCE: 0.5 - 6.0KG
LIFE: 1,000 CYCLES

	MATERIAL	PLATING
TERMINALS 1-4	Brass	Tin
EARTH TERMINAL	Brass	Tin
HOUSING	PBT	