

## UNCONTROLLED DOCUMENT



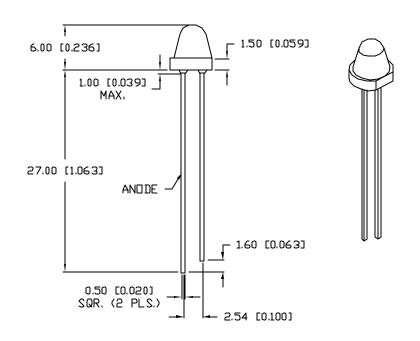

## PART NUMBER SSL-LX5063ID

REV.

REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE
Α	UPDATED SPECS,	7.27.95
В	REDRAWN.	11.10.97
C	E.C.N. #108RDR. & REDRAWN IN 3D.	4.19.01
	E.C.N. #11148	10.31.06

ELECTRO-OPTICAL CHARACTERISTICS TA=25°C If=20mA					
PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH		635		nm	
FORWARD VOLTAGE		2.0	2,5	$V_{f}$	
reverse voltage	5.0			٧r	Ir=100μA
AXIAL INTENSITY		40		mcd	$I_f = 20mA$
VIEWING ANGLE		60		2x theta	
EMITTED COLOR:	RED				
EPOXY LENS FINISH:	RED DIFFUSED				

## LIMITS OF SAFE OPERATION AT 25°C

PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT*	150	mA
STEADY CURRENT	<i>3</i> 0	mA
POWER DISSIPATION	105	mW
DERATE FROM 25°C	- 1.2	mW∕°C
OPERATING, STORAGE TEMP.	- 40 TO +85	'Ċ
SOLDERING TEMP.	+ 260	<b>'</b> C
2.0mm FROM BODY		3 SEC. MAX

\* t<10µS

D



UNCONTROLLED DOCUMENT

\*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECINAL PRECISION ARE: X=±1 (±0.039), XX=±0.5 (±0.020), XXX=±0.25 (±0.010), XXXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.003), MN= +0.000 MAX.= +

REV.	PART NUMBER
D	SSL-LX5063ID

T-5mm (T-1 3/4) 635nm RED LED,
RED DIFFUSED LENS.

Confidential information

The information contained in this document is the proferty of Lumex ing. Except as specifically authorized in Writing By Lumex ing. The Holder of this document shall keep all information contained herein confidential and shall profect same in Whole or in Part From disolusible and obsernation to all third parties.

RELABILITY NOTE

OUR MANY YEARS OF EXPERENCE DATA ACCUMULATION INDICATE THAT

SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE.
PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



| 290 E. HELEN ROAD | PALATINE, IL 60067-6976 | PHONE: +1.847.359.2790 | US WFB: www.lumex.com

US WEB: www.lumex.com TW WEB: www.lumex.com.tw

DRAWN BY:	CHECKED	BY:	APPROVED	BY:	DATE:	10.31.06	
					PAGE:	1 OF 1	
JC					SCALE:	N/A	

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

<u>Lumex</u>:

SSL-LX5063ID