





TOP VIEW

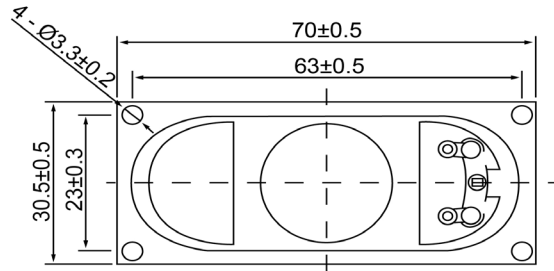

SIDE VIEW

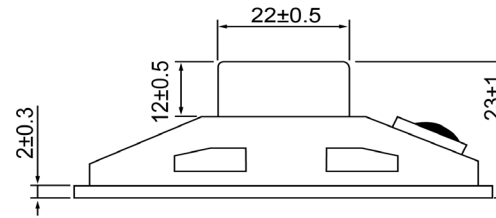

Specifications			Notes	Revision History					
Description	Value	Unit		Version	Description	Date	Approved		
Shape	Rectangle		1) All dimensions are in mm unless otherwise noted 2) All parts meet RoHS	1	Released from Engineering	2/5/2014	J.S.		
Resonant Frequency	300	(Hz)							
Frequency Range	200 ~ 20,000	(Hz)							
SPL @ 10cm	100	(dBA)							
Impedance	8	(Ohm)							
Cone Material	Cloth								
Nominal Power	2	(W)							
Max Power	5	(W)							
Mount Type	Frame Mount								
Operating Temperature	-40 ~ +80	°C							
Storage Temperature	-40 ~ +80	°C							
Weight	7.6	(g)							
 DB UNLIMITED			 DB UNLIMITED			High Temp Dynamic Speaker		SC700308-1	
						Drawn by: G.W. Date: 1/27/2014 Checked by: C.E. Date: 2/5/2014 Approved by: J.S. Date: 2/5/2014			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[DB Unlimited:](#)

[SC700308-1](#)