






SPC
TECHNOLOGY

ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION,
WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED
WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC
TECHNOLOGY.

SPC-F005.DWG

REVISIONS				DOC. NO. SPC-F005 * Effective: 7/8/02 * DCP No: 1398			
DCP #	REV	DESCRIPTION		DRAWN	DATE	CHECKD	DATE
				VEE	03-08-10	JAG	04-08-10
							17-08-10

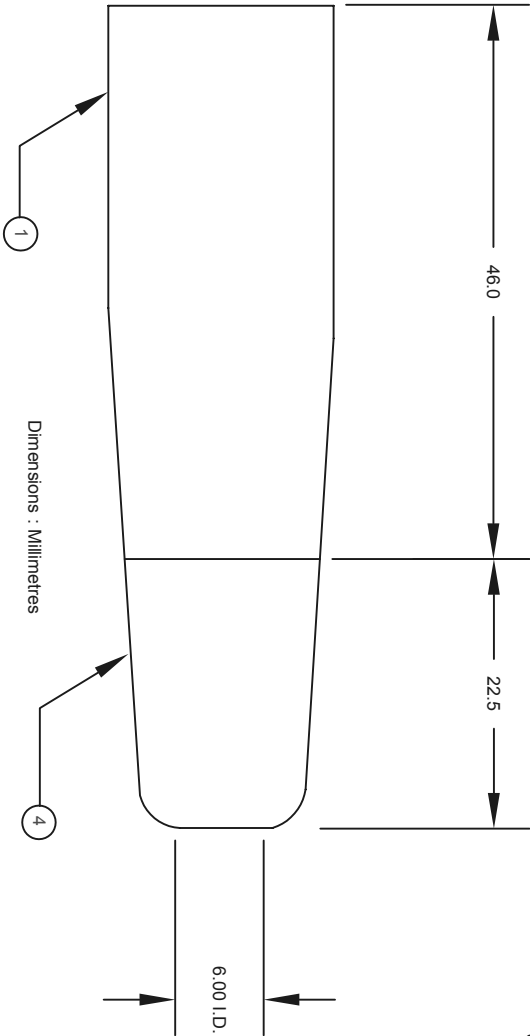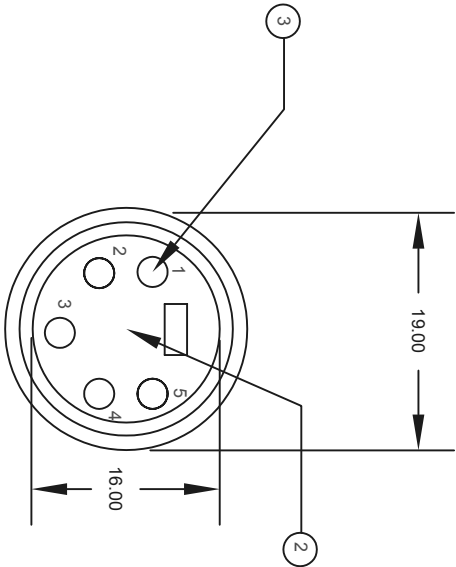

Electrical specifications:

1. Contact rating : 7.5A at 125 VAC
2. Contact resistance : 5 milliohms maximum
3. Insulation resistance : 5000 Megohms minimum at 500 VDC
4. Dielectric strength : 1400 VAC
5. Capacitance : 7pF maximum

Mechanical specifications:

1. Insertion force : 1.0 to 8.0kg
2. Withdrawal force : 1.0 to 8.0kg

Environmental specifications:

1. Operating temperature : -55°C to 70°C

Item	Part	Material
1	Housing	Zinc Die Cast/ Black Nickel Plated
2	Insert Insulator	PP0-1, UL 94V-0, Rated Gray
3	Pin	Brass/Silver Plated
4	Cable Relief	PVP/Matte Finish

Part Number Table

Description	Part Number
5 Pin Male XLR Type Audio Cord Plug	SPC21421

DISCLAIMER:
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED
HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE
BELIEVE TO BE ACCURATE AND RELIABLE. SINCE
CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE
USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT
FOR THE INTENDED USE AND ASSUME ALL RISK AND
LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

TOLERANCES:

UNLESS OTHERWISE
SPECIFIED, DIMENSIONS ARE
FOR REFERENCE
PURPOSES ONLY.

DRAWN BY:	DATE:	DRAWING TITLE:			
VEE	03-08-10	5 Pin Male XLR Type Audio Cord Plug			
CHECKED BY:	DATE:	SIZE	DWG. NO.	ELECTRONIC FILE	
JAG	04-08-10	XXX	XXX	84N1098	
APPROVED BY:	DATE:	SCALE:	NTS	U.O.M.: INCHES [mm]	SHEET: 1 OF 1
XXX	17-08-10				