

CATALOG LISTING  
BZ-2RW82272555124-A2  
PAGE 1 OF 1  
ISSUE 3  
REVISIONS  
A 0016786  
SPK  
23NOV05  
B 0046794  
KNR  
10DEC08  
RASTER  
DRAWN  
G J W  
1 APR 99  
CHECK  
J A F  
2 APR 99  
CHECK  
R J  
23NOV05  
CHECK  
R S  
10 DEC08  
RELEASE NO. PR-24038  
REPLACES  
X111903-BZ


**MICRO SWITCH**  
a Honeywell Division  
FED. MFG. CODE 91929

# SWITCH - BASIC

CATALOG LISTING  
BZ-2RW82272555124-A2

PRODUCT CODE: AQC9944

WHEN SEARCHING FOR THIS CATALOG LISTING WITHIN HONEYWELL'S INTERNAL SAP SYSTEM, THE LISTING MUST BE ENTERED WITHOUT DASHES(BZ2RW82272555124A2) DUE TO CHARACTER LIMITATIONS IMPOSED BY THE SYSTEM

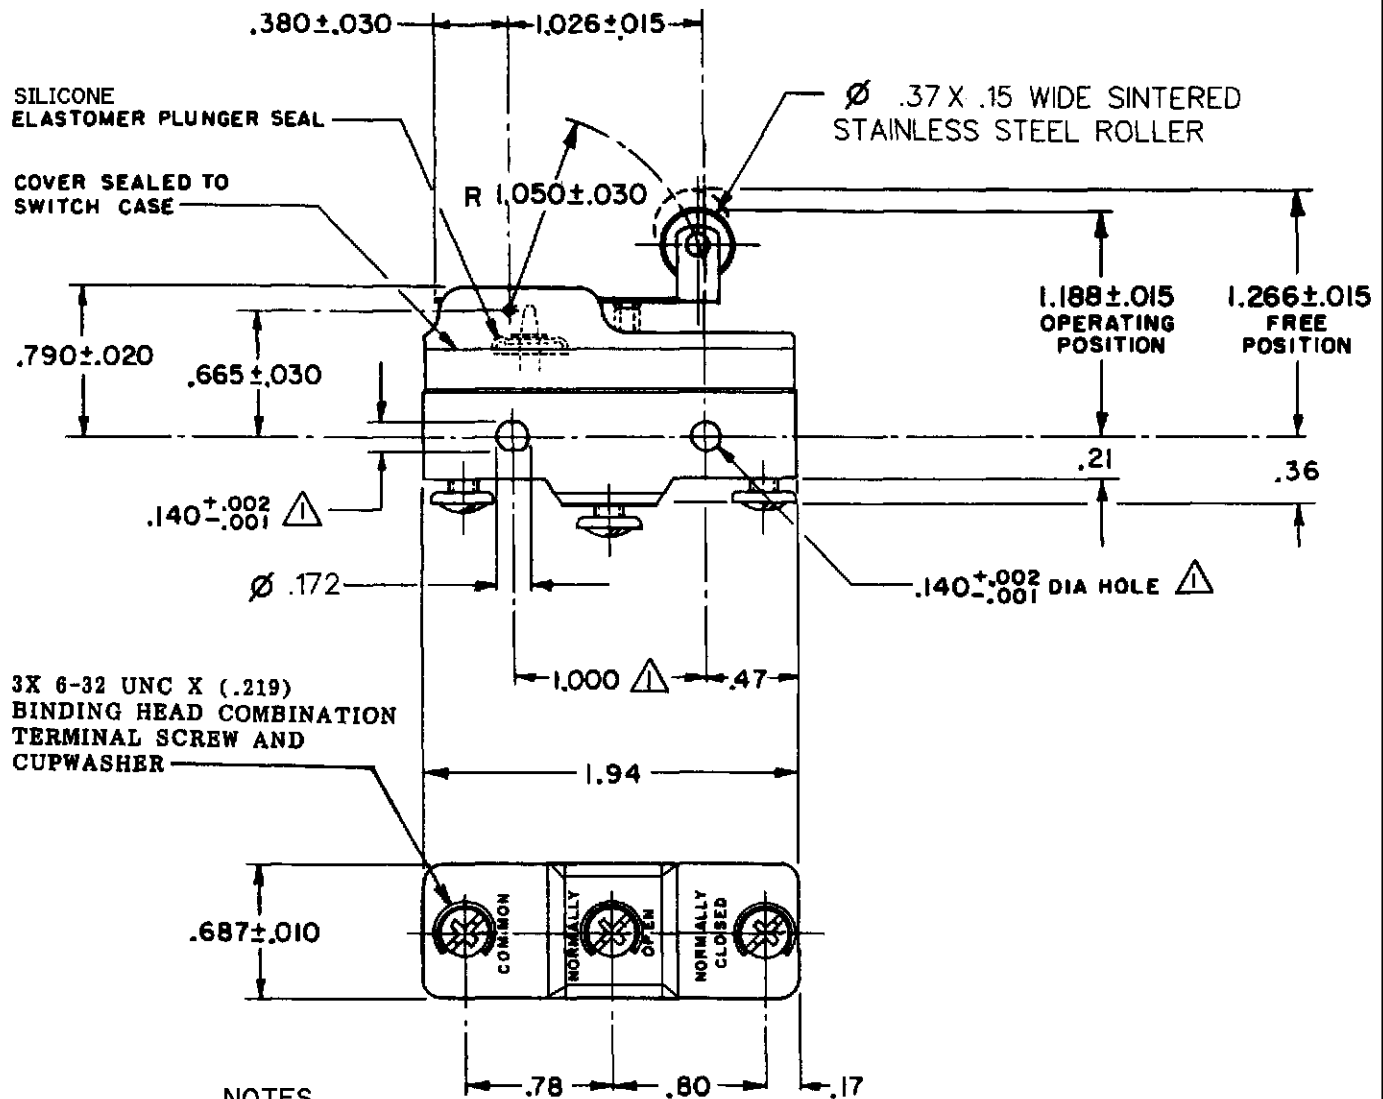


## NOTES





- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF  $\phi .139$  MAX ON  $1.000 \pm .002$  CENTERS
- 2 - SEALED CONSTRUCTION PROVIDES SPLASH RESISTANCE
- 3 - CONTACT MATERIAL : GOLD ALLOY
- 4 - SWITCH WILL WITHSTAND TEMPERATURE OF  $250^{\circ} F$

## ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS	ELECTRICAL DATA		SCALE	NONE	DO NOT SCALE PRINT
	CONTACT ARRANGEMENT SPDT		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		
OPERATING FORCE----- 6 OZ MAX	L22	1A 125 VAC  	ONE PLACE	(.0)	±.030
RELEASE FORCE----- 1 1/2 OZ MIN			TWO PLACE	(.00)	±.015
DIFFERENTIAL TRAVEL-----.003-.020			THREE PLACE	(.000)	±.005
OVERTRAVEL----- .094 MIN			ANGLES		±
	L288 L307 L315	  1A 250V ~ T85 25E3	WEIGHT		

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Honeywell:](#)

[SCN-2414SC](#)