

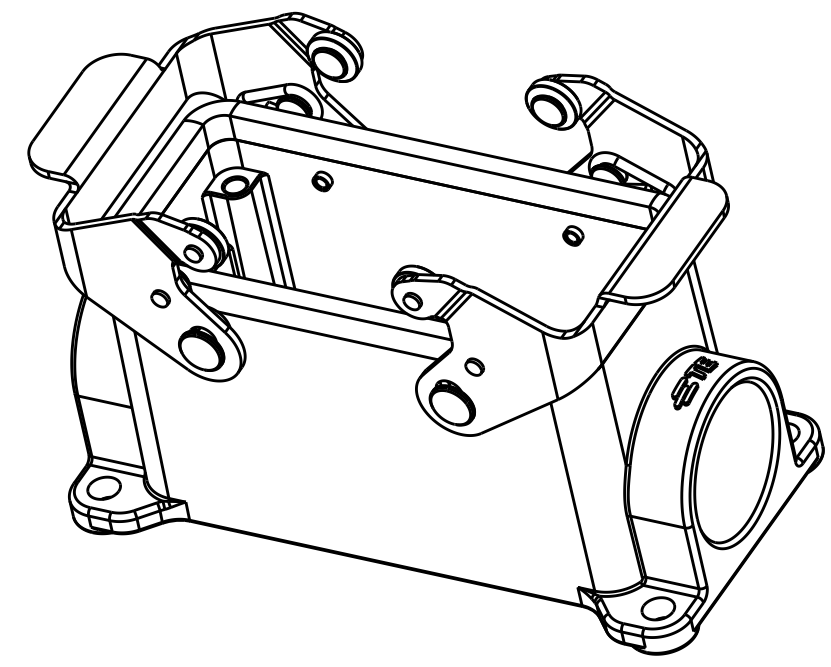
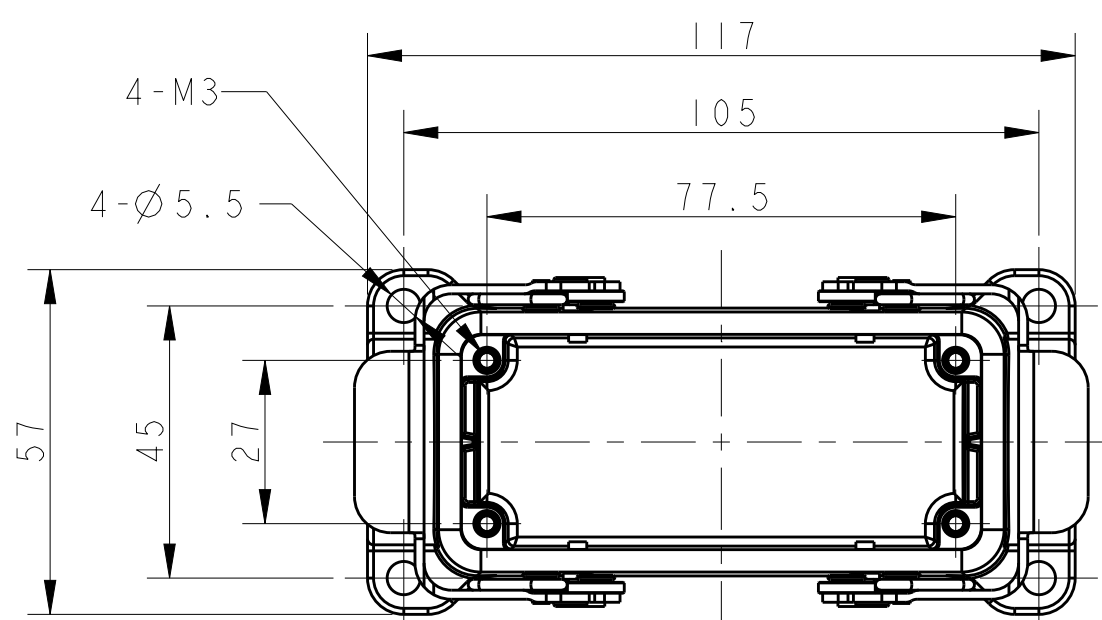


D

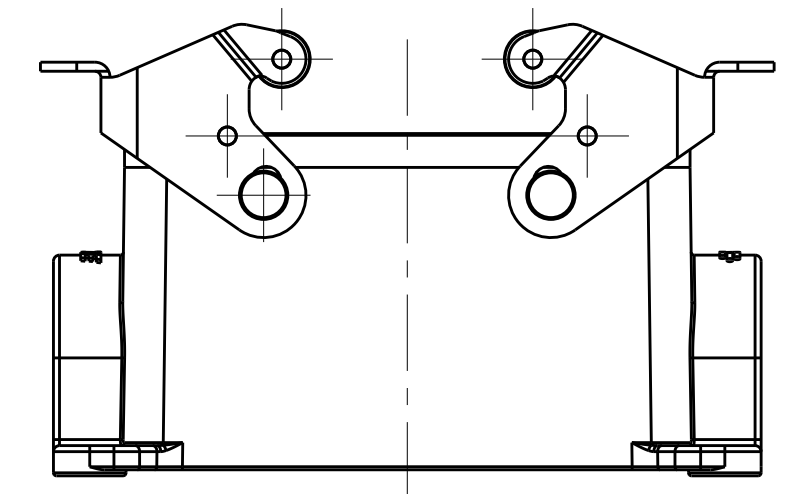

C

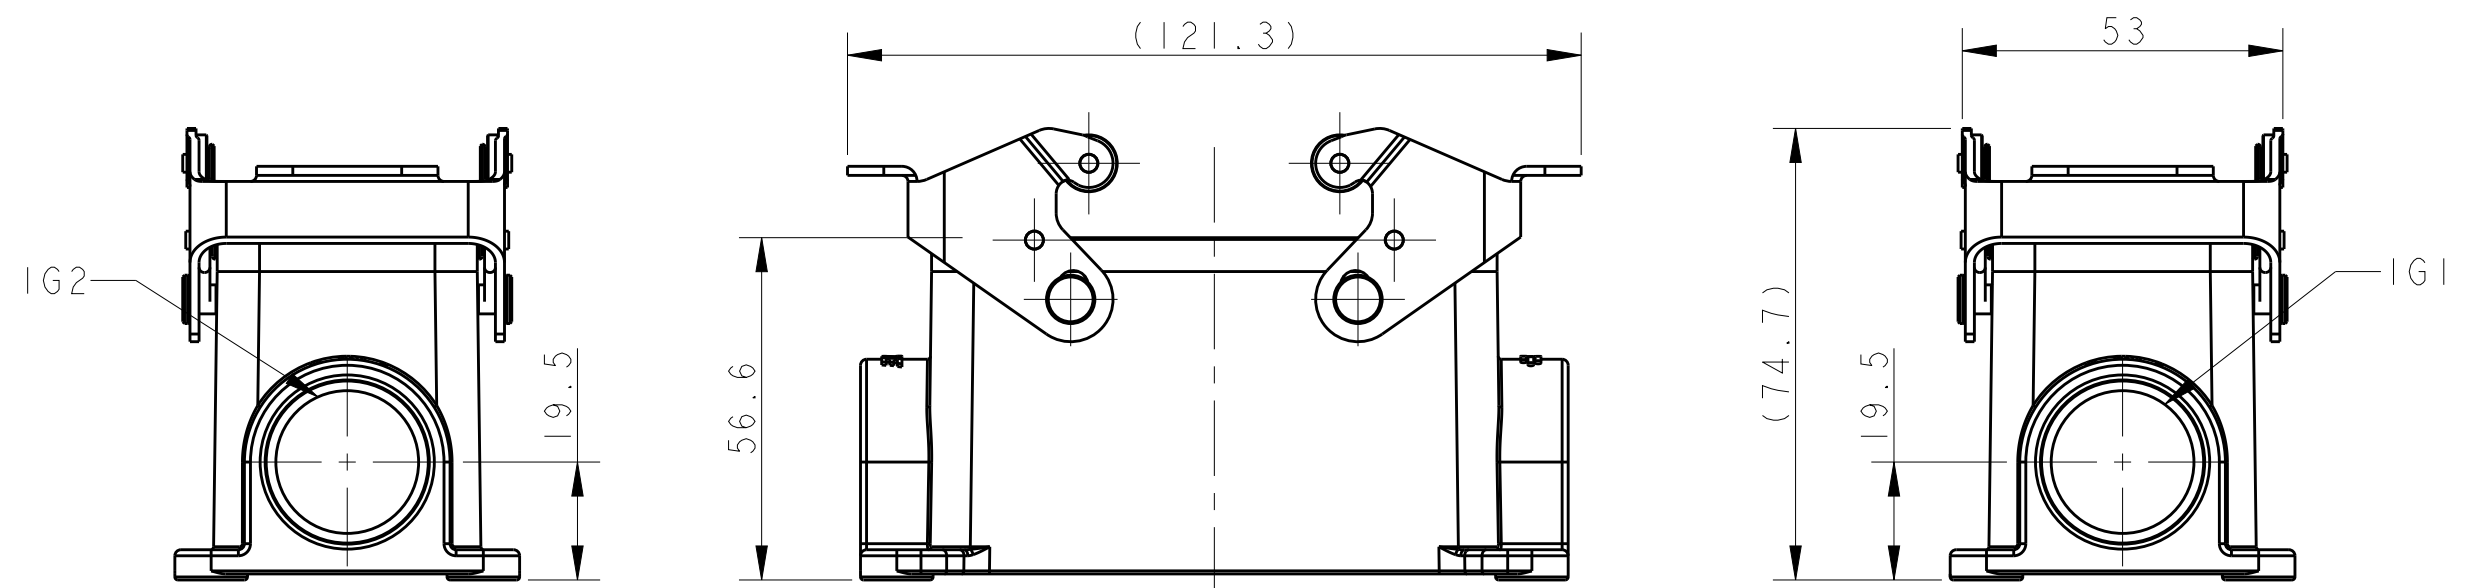


B

TYPE 1: BODY + STAINLESS STEEL LOCKING

TYPE 3: BODY + STAINLESS STEEL LOCKING
BOTTOM CUT OUT
OTHER SPEC REFER TO TYPE 1

A

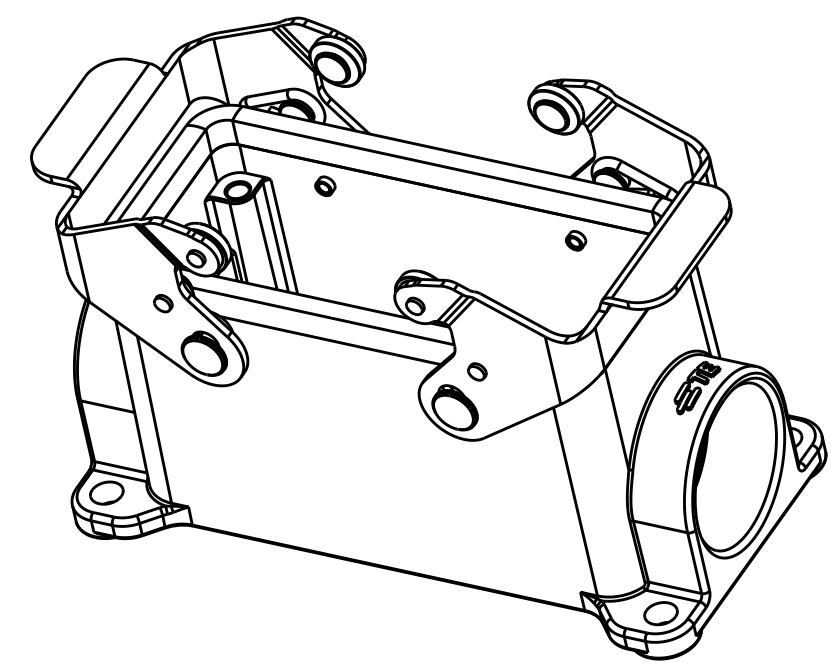

TYPE 2: BODY + STAINLESS STEEL LOCKING
SILVER WHITE COATED
OTHER SPEC REFER TO TYPE 1

NOTES:
1. TECHNICAL CHARACTERISTICS:
BODY MATERIAL: DIE CAST ALUMINIUM ALLOY
SURFACE TREATMENT: POWDER-COATED, COLOR SEE TABLE
OPERATION TEMPERATURE: -40-+125°C
DEGREE OF PROTECTION: IP65 (MATED)

注释:
1. 技术参数:
主体材料: 铝合金
表面处理: 粉末喷涂, 颜色见表格
工作温度: -40-+125°C
防护等级: IP65(配合)

TI440161121-000	TYPE 1	HI6B-SGRS-PG2I	GRAY	PG2I	-
TI440161125-000		HI6B-SGRS-M25		M25	-
TI440161221-000		HI6B-SGRS-2PG2I		PG2I	PG2I
TI440161225-000		HI6B-SGRS-2M25		M25	M25
TI440161121-100	TYPE 2	HI6B-SGRS-PG2I	SILVER WHITE	PG2I	-
TI440160000-000	TYPE 3	HI6B-SGRS-T	GRAY	-	-
ASSEMBLY PART NUMBER	TYPE	ASSEMBLY PART DESCRIPTION	COLOR	IG1	IG2

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm

MATERIAL
TBD

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±
1 PLC	±
2 PLC	±
3 PLC	±
4 PLC	±
ANGLES	±
FINISH	-
	-

DWN DAVID LI 19JUN2015

CHK CHRIS WANG 19JUN2015

APVD XU XIANG 19JUN2015

PRODUCT SPEC
108-137013

APPLICATION SPEC
114-137013

WEIGHT
-

CUSTOMER DRAWING


TE Connectivity

NAME
HI6B-SGRS-PG/M

SIZE A2	CAGE CODE -	DRAWING NO ©-TI44016XXXXX00	RESTRICTED TO -
------------	----------------	--------------------------------	--------------------


SCALE 4:5	SHEET 1	OF 2	REV A
--------------	------------	---------	----------

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

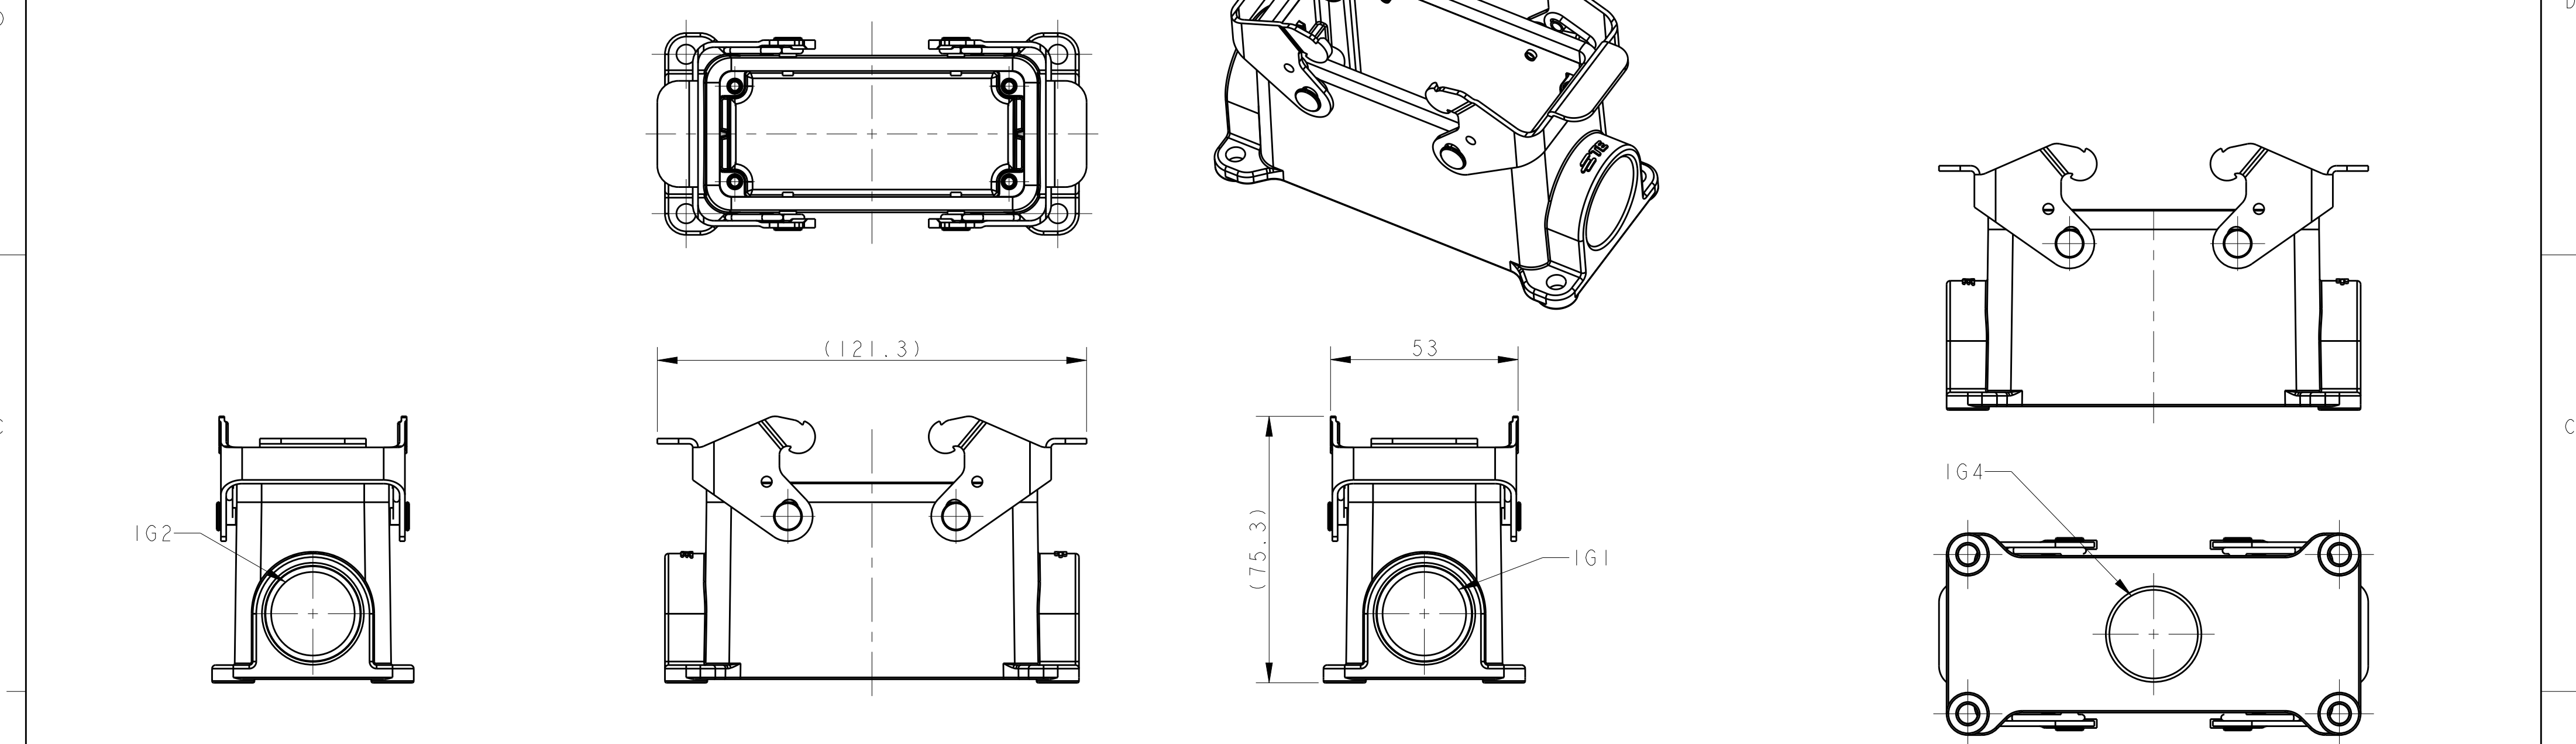

TYPE 4: BODY + STEEL LOCKING
OTHER SPEC REFER TO TYPE 1

TYPE 6: BODY + STEEL LOCKING
BOTTOM 1 HOLE
OTHER SPEC REFER TO TYPE 4

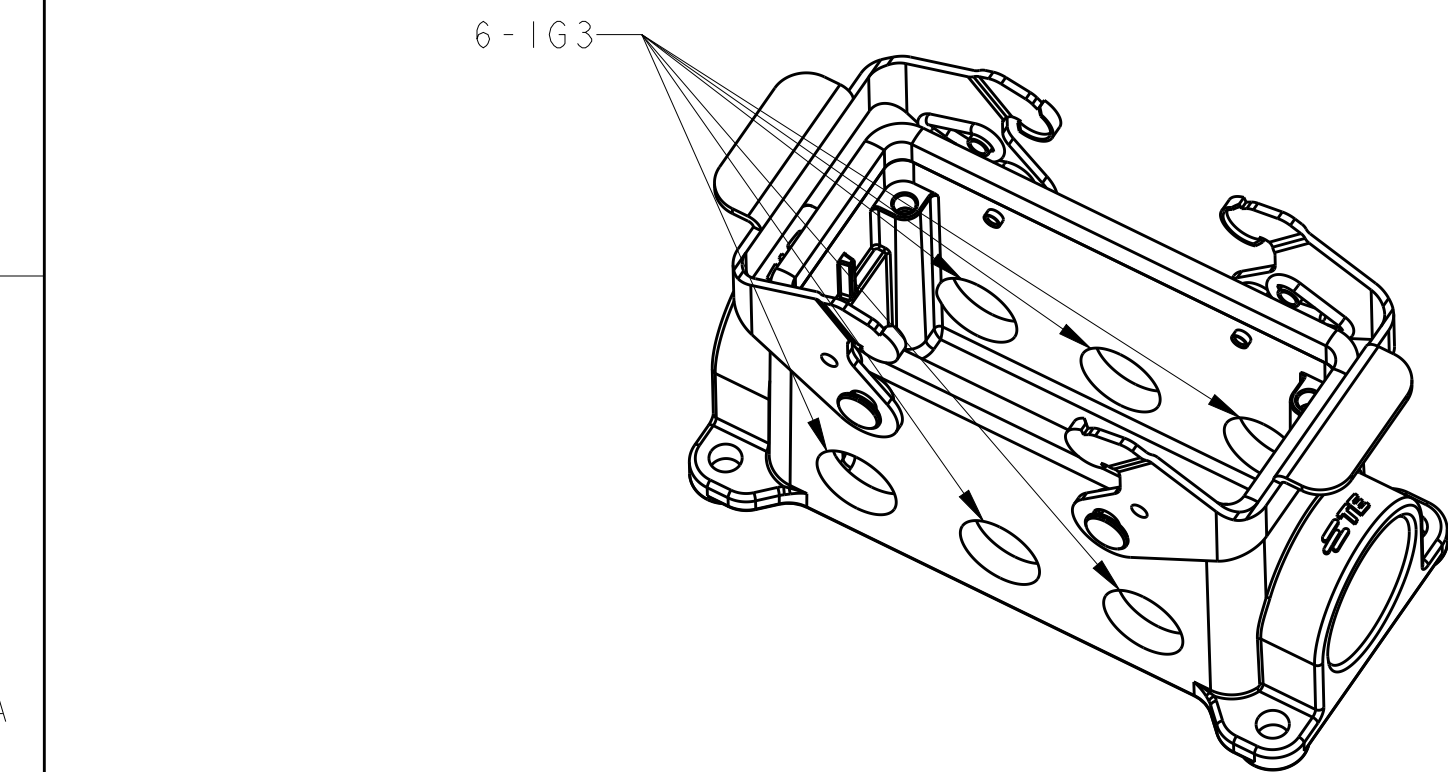

TYPE 5: BODY+ STEEL LOCKING
FRONT/BACK 6 HOLE
OTHER SPEC REFER TO TYPE 4

T1440162121-000	TYPE 4	HI6B-SGR-PG21	GRAY	PG21	-	-	-
T1440162125-000		HI6B-SGR-M25		M25	-	-	-
T1440162221-000		HI6B-SGR-2PG21		PG21	PG21	-	-
T1440162225-000		HI6B-SGR-2M25		M25	M25	-	-
T1440161625-000		HI6B-SGR-M25/PG16		M25	PG16	-	-
T1440162521-000		HI6B-SGR-M25/PG21		M25	PG21	-	-
T1440162532-000		HI6B-SGR-M25/M32		M25	M32	-	-
T1440162609-000	TYPE 5	HI6B-SGR-6PG9		-	-	PG9	-
T1440165125-000	TYPE 6	HI6B-SGR-TM25		-	-	-	M25
ASSEMBLY PART NUMBER	TYPE	ASSEMBLY PART DESCRIPTION	COLOR	IG1	IG2	IG3	IG4

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 19JUN2015 DAVID LI	TE Connectivity				
DIMENSIONS: mm		CHK 19JUN2015 CHRIS WANG					
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD 19JUN2015 XU XIANG	NAME HI6B-SGR-PG/M				
0 PLC ±-		PRODUCT SPEC	SIZE A2 CAGE CODE - DRAWING NO. C-T144016XXXXX00 RESTRICTED TO -				
1 PLC ±-		108-137013					
2 PLC ±-		APPLICATION SPEC	SCALE 4:5 SHEET 2 OF 2 REV A				
3 PLC ±-		114-137013					
4 PLC ±-		WEIGHT -					
ANGLES ±-		CUSTOMER DRAWING					
FINISH -							

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[T1440162121-000](#)