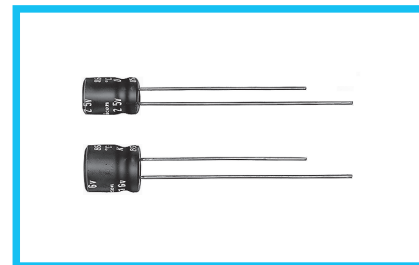


USP

7mmL, Bi-Polarized



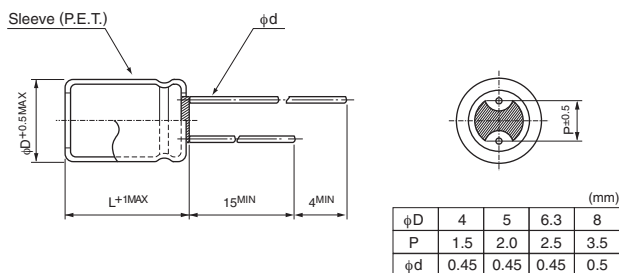
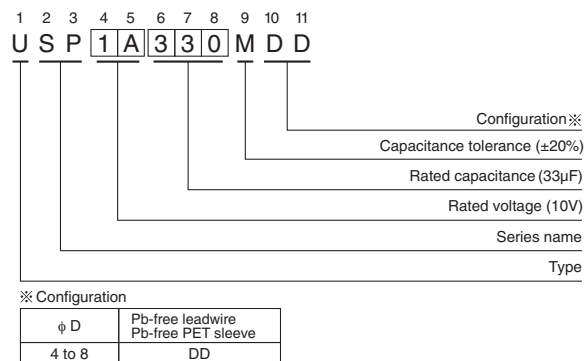
- Bi-polarized series with 7mm height.
- Extended capacitance range by an addition of $\phi 8$ product.
- Compliant to the RoHS directive (2011/65/EU).



■ Specifications

Item	Performance Characteristics													
Category Temperature Range	-40 to +85°C													
Rated Voltage Range	6.3 to 50V													
Rated Capacitance Range	0.1 to 220μF													
Capacitance Tolerance	± 20% at 120Hz, 20°C													
Leakage Current	After 2 minutes' application of rated voltage at 20°C, leakage current is not more than 0.05CV or 10 (μA), whichever is greater.													
Tangent of loss angle (tan δ)	Measurement frequency : 120Hz at 20°C													
	Rated voltage (V)	6.3	10	16	25	35	50							
	tan δ (MAX.)	0.24	0.20	0.16	0.16	0.14	0.12							
Stability at Low Temperature	Measurement frequency : 120 Hz													
	Rated voltage (V)		6.3	10	16	25	35	50						
	Impedance ratio	Z-25°C / Z+20°C	4	3	2	2	2	2						
	ZT / Z20 (MAX.)	Z-40°C / Z+20°C	8	6	4	4	3	3						
Endurance	The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 2000 hours at 85°C with the polarity inverted every 250 hours.													
								Capacitance change		Within ±20% of the initial capacitance value				
								tan δ		200% or less than the initial specified value				
	Leakage current		Less than or equal to the initial specified value											
Shelf Life	After storing the capacitors under no load at 85°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above.													
Marking	Printed with white color letter on black sleeve.													

■ Radial Lead Type

Type numbering system (Example : 10V 33 μ F)

■ Dimensions

V	6.3	10	16	25	35	50
Cap.(μ F)	0J	1A	1C	1E	1V	1H
0.1	0R1					4 × 7
0.22	R22					4 × 7
0.33	R33					4 × 7
0.47	R47					4 × 7
1	010					4 × 7
2.2	2R2					4 × 7
3.3	3R3					4 × 7
4.7	4R7					4 × 7
10	100	4 × 7	24	5 × 7	30	6.3 × 7
22	220	5 × 7	40	6.3 × 7	51	6.3 × 7
33	330	5 × 7	42	6.3 × 7	53	6.3 × 7
47	470	6.3 × 7	58	6.3 × 7	53	6.3 × 7
100	101	8 × 7	95	8 × 7	73	8 × 7
220	221	8 × 7	140			

● Frequency coefficient of rated ripple current

Frequency	50 Hz	120 Hz	300 Hz	1 kHz	10 kHz or more
Coefficient	0.70	1.00	1.17	1.36	1.50

Rated ripple current (mArms) at 85°C 120Hz

Please refer to page 20, 21, 22 about the formed or taped product spec.
Please refer to page 4 for the minimum order quantity.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Nichicon:

[USP0J470MDD](#) [USP1A100MDD](#) [USP1C330MDD](#) [USP1C470MDD](#) [USP0J221MDD](#) [USP0J330MDD](#)
[USP0J101MDD](#) [USP1A470MDD](#) [USP1C100MDD](#) [USP1A101MDD](#) [USP1A220MDD](#) [USP1A330MDD](#)
[USP1C4R7MDD](#) [USP1E100MDD](#) [USP1H0R1MDD](#) [USP1H100MDD](#) [USP1V100MDD](#) [USP1V220MDD](#)
[USP1C101MDD](#) [USP1C220MDD](#) [USP1E4R7MDD](#) [USP1H010MDD](#) [USP1HR22MDD](#) [USP1HR33MDD](#)
[USP1HR47MDD](#) [USP1E220MDD](#) [USP1E330MDD](#) [USP1E470MDD](#) [USP1H3R3MDD](#) [USP1H4R7MDD](#)
[USP1V4R7MDD](#) [USP1H220MDD](#) [USP1H2R2MDD](#) [USP1V330MDD](#) [USP1V3R3MDD](#) [USP1C470MCA](#)
[USP1C470MDD1TP](#) [USP1J100MDD](#) [USP1J470MPD1TA](#) [USP1C220MDD1BB](#) [USP1J222MHD](#)