

Strip Block for Snap-in Mounting with up to 7 IEC Appliance Outlets F




Snap-In Version



Snap-In Version



Snap-In Version



Description

- Panel Mount:
Snap-in version from front side
- 2 Functions:
Module of 2 up to 7 outlets, Pin temperature 70 °C, Protection class I
- Solder terminals

Characteristics

- Qualified for use in equipment according IEC/EN 60950

Other versions on request

- Other panel thickness

References

[General Product Information](#)

Weblinks


[Approvals](#), [RoHS](#), [CHINA-RoHS](#), [Mating Connectors](#), [e-Store](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#)

Technical Data

Ratings IEC	10A / 250VAC; 50Hz
Ratings UL/CSA	15A / 250VAC; 60Hz
Dielectric Strength	> 2kVAC between L-N > 2kVAC between L/N-PE (1 min/50Hz)
Allowable Operation Temp.	-25 °C to 70 °C
Degree of Protection	from front side IP 30 acc. to IEC 60529
Protection Class	Suitable for appliances with protection class 1 acc. to IEC 61140
Terminal	Solder terminals
Panel Thickness s	Snap-in 1.5mm tolerance +0.0/-0.1
Material: Housing	Thermoplastic, black, UL 94V-0

Appliance Outlet	F acc. to IEC/EN 60320-2-2, UL 498 CSA C22.2 no. 42 (for cold conditions) pin-temperature 70 °C, 10A, Protection Class 1
------------------	---

Dimensions

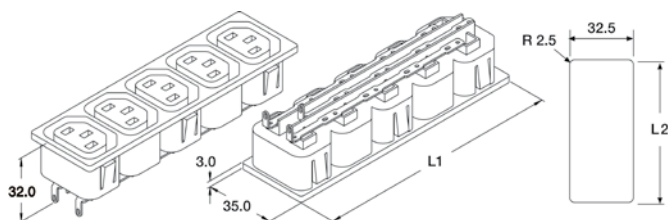

Variants

[Distributor-Stock-Check](#) | [SCHURTER-Stock-Check](#) | [e-Store](#)

Panel Thickness s [mm]	Connector	Length L1 [mm]	Length L2 [mm]	Order Number
1.5	2	51.2	48.3	0909.0001
1.5	3	75.2	72.3	0909.0011
1.5	4	99.2	96.3	0909.0021
1.5	5	123.2	120.3	0909.0031
1.5	6	147.2	144.4	0909.0041
1.5	7	171.2	168.4	0909.0051

Packaging unit 120 Pcs

Accessories

Description

[Cord retaining kits](#)

Cord retaining strain relief

Flat head, Z

0888.0021

Countersunk, C

4700.0003

Mating Inlets/Plugs

Category / Description

[Interconnection Cord Overview complete](#)

Interconnection Cord with IEC Plug E, Angled

0607

Interconnection Cord with IEC Plug E, Angled

0608

Interconnection Cord with IEC Plug E, Straight

0609

Interconnection Cord with IEC Plug G, Angled

607B

Interconnection Cord with IEC Plug G, Angled

608B

[Interconnection Cord further types to 0909](#)

...

[Plug Overview complete](#)

IEC Plug E, Cord Connector (Rewireable), Straight, max. cable Diameter 8.5 mm

4732

IEC Plug E, Cord Connector (Rewireable), Angled, max. Cable Diameter 10 mm

4733

IEC Plug E, Cord Connector (Rewireable), Straight, max. Cable Diameter 10 mm

4735

IEC Plug E, Cord Connector (Rewireable), Angled, max. Cable Diameter 10 mm

4736

IEC Plug E, Cord Connector (Rewireable), Straight

9009

[Plug further types to 0909](#)

...