

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0009930500

Status:

Active

Overview:

KK® Interconnect System - Molex

Description:

KK® 3.96mm Crimp Terminal Housing, Friction Ramp, 5 Circuits, Glow Wire Compatible

Documents:

3D Model

Drawing (PDF)

Product Specification PS-99020-0087-001 (PDF)


Packaging Specification PK-3069-001-001 (PDF)

RoHS Certificate of Compliance (PDF)

|                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Agency Certification |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| UL                   | E29179                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| General              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Product Family       | Crimp Housings                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Series               | 3069                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Application          | Power, Wire-to-Board                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Comments             | This Molex product is manufactured from material that has the following ratings, tested by independent agencies :. a) A Glow Wire Ignition Temperature (GWIT) of at least 775 deg C per IEC 60695-2-13.. b) A Glow Wire Flammability Index (GWFI) above 850 deg C per IEC 60695-2-12.and hence complies with the requirements set out in the International Standard IEC 60335-1 5th edition - household and similar electrical appliances - safety; section 30 Resistance to heat and fire.<P><P>The customers using this product must determine its suitability for use in their particular application through testing or other acceptable means as described in end-product glow-wire flammability test standard IEC 60695-2-11 and any applicable product end-use standard(s).<P>If it is determined during the customer's evaluation of suitability, that higher performance is required, please contact Molex for possible product options. |
| Overview             | KK® Interconnect System - Molex                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Product Name         | KK® 396                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| UPC                  | 883906174217                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |

|                               |                           |
|-------------------------------|---------------------------|
| Physical                      |                           |
| Circuits (maximum)            | 5                         |
| Circuits Detail               | 5                         |
| Color - Resin                 | Black                     |
| Flammability                  | 94V-2                     |
| Gender                        | Receptacle                |
| Glow-Wire Compliant           | Yes                       |
| Lock to Mating Part           | Yes                       |
| Material - Resin              | Nylon                     |
| Net Weight                    | 1.270/g                   |
| Number of Rows                | 1                         |
| Packaging Type                | Bag                       |
| Panel Mount                   | No                        |
| Pitch - Mating Interface      | 3.96mm                    |
| Temperature Range - Operating | See Product Specification |

Material Info

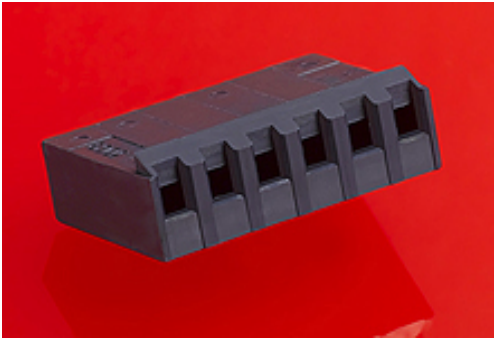

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

China RoHS

Compliant

REACH SVHC

Not Contained Per

-ED/01/2017 (12 January 2017)

Halogen-Free

Status

Not Low-Halogen

Need more information on product environmental compliance?

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)  
Please visit the [Contact Us](#) section for any non-product compliance questions.

China ROHS

Green Image

ELV

Not Relevant

RoHS Phthalates

Not Contained

Search Parts in this Series

3069 Series

Mates With

[2220](#) , [3190](#) , [3192](#) , [3243](#) , [3246](#) , [41661](#) , [41662](#) , [41671](#) , [41672](#) , [41681](#) , [41682](#) , [41701](#) , [41711](#) , [41721](#) , [41741](#) , [41761](#) , [41771](#) , [41772](#) , [41791](#) , [41792](#) , [42441](#) , [42461](#) , [42471](#) , [42491](#)

Use With

[2478](#) Crimp Terminals for 18-24 AWG, [2578](#) Crimp Terminals for 22-26 AWG

|                                    |                   |
|------------------------------------|-------------------|
| Engineering Number                 | 3069-G05          |
| <b>Reference - Drawing Numbers</b> |                   |
| Packaging Specification            | PK-3069-001-001   |
| Product Specification              | PS-99020-0087-001 |
| Sales Drawing                      | SD-3069-GN***     |

This document was generated on 05/25/2017

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**