

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0638132700](#)
Status: **Active**
Overview: [Application Tooling](#)
Description: Extraction and Activation Tool

Documents:

[RoHS Certificate of Compliance \(PDF\)](#)

General

Product Family	Application Tooling
Series	207121
Comments	See Tooling Specification (PDF) Above
Function	Extraction
Geographic Area	Global
Level of Automation	Manual
More Detailed Tech Information	applicationtooling@molex.com
Overview	Application Tooling
Product Name	PremiumGrade
Tool Type	Extraction Hand Tool
UPC	756054924921
Warranty Disclaimer	CAUTION: Molex tooling crimp specifications are valid only when used with Molex terminals and tooling manufactured by Molex and sold by Molex or authorized distributors ("Molex Tooling"). When using tooling other than Molex Tooling with Molex specific connector systems listed in our ATS documents, the Molex tooling qualification does not apply and the responsibility for full qualification of the connector system is that of the customer. Molex accepts no liability for connector performance or tooling support where tooling other than Molex Tooling is used or where Molex Tooling is modified.


Physical

Net Weight 2.470/g

Material Info

Reference - Drawing Numbers

Application Tooling Documents
 ATS-638132700-001, TM-638000029-001, TM-638000029CN-001, TM-638000029DE-001, TM-638000029FR-001, TM-638000029IT-001, TM-638000029JP-001, TM-638000029KR-001, TM-638000029MY-001, TM-638000029PL-001, TM-638000029RU-001, TM-638000029SK-001, TM-638000029SP-001, TM-638000029TH-001, TM-638000029TW-001, TM-638000029VN-001

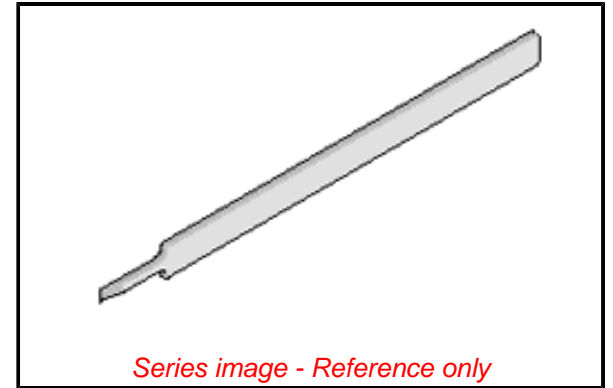

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per - ED/30/2017 (7 July 2017)

Halogen-Free

Status

Not Relevant

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Not Relevant

Not Relevant

Not Contained

Search Parts in this Series

[207121 Series](#)

Application Tooling

Description

FAQ

Product #

SPOX Crimp Terminal, 18-24 AWG, Brass, Reel Super Sabre Female Crimp Terminal	8701031
2.00mm Pitch, Pico-Lock Female Crimp Terminal, Gold (Au) Plating, 20-22 AWG	2053425028
2.00mm Pitch, Pico-Lock Female Crimp Terminal, Gold (Au) Plating, 24-26 AWG	2053425128
L1NK 300 Female Crimp Terminal, 18-20 AWG, Tin (Sn) Plating, Reel	2063960001
Mini-Fit Max Female Crimp Terminal, Tin	2125153101

over Nickel Plating,
14 AWG, Reel
Mini-Fit Max Female 2125153102
Crimp Terminal, Tin
over Nickel Plating,
16 AWG, Reel
Earth Terminal for 354658000
PT Bulb Socket,
AVSS 0.50~0.85mm²
VersaBlade Male 357450110
Crimp Terminal,
20-22 AWG, Type A
VersaBlade Male 357450210
Crimp Terminal,
14-18 AWG, Type A
VersaBlade Male 357450310
Crimp Terminal,
18+18, 20+20 AWG,
Type A
VersaBlade Male 357450410
Crimp Terminal, 24
AWG, Type A
VersaBlade Female 357460110
Crimp Terminal,
20-22 AWG, Type A
VersaBlade Female 357460210
Crimp Terminal,
14-18 AWG, Type A
VersaBlade Female 357460310
Crimp Terminal,
18+18, 20+20 AWG,
Type A
VersaBlade Female 357460410
Crimp Terminal, 24
AWG, Type A
VersaBlade Male 357470110
Crimp Terminal,
20-22 AWG, Type B
VersaBlade Male 357470210
Crimp Terminal,
14-18 AWG, Type B
VersaBlade Male 357470310
Crimp Terminal,
18+18, 20+20 AWG,
Type B
VersaBlade Male 357470410
Crimp Terminal, 24
AWG, Type B
VersaBlade Female 357480110
Crimp Terminal,
20-22 AWG, Type B
VersaBlade Female 357480210
Crimp Terminal,
14-18 AWG, Type B
VersaBlade Female 357480310
Crimp Terminal,
18+18, 20+20 AWG,
Type B
VersaBlade Female 357480410
Crimp Terminal, 24
AWG, Type B
SPOX Crimp 39000021
Terminal, 18-24
AWG, Phosphor
Bronze, Reel

Flat Blade Crimp 40021601
 Terminal, Series
 41422, Female, With
 Tin (Sn) Plated Brass
 Contact, 10-12 AWG,
 Reel Packaged
 Flat Blade Crimp 40021602
 Terminal, Series
 41422, Female, With
 Tin (Sn) Plated Brass
 Contact, 14-18 AWG,
 Reel Packaged
 Crimp Terminal 414225001
 41422, 14-18 AWG,
 Reel
 Sabre Crimp 433740001
 Terminal, Female,
 14-16 AWG, 0.79mm
 max. Insulation
 Diameter, Reel
 Packaged, Tin (Sn)
 Plated Brass Contact
 Sabre Single Crimp 433750001
 Terminal, Female,
 14-16 AWG, 3.30mm
 Max. Insulation
 Diameter, Reel
 Packaged, Tin (Sn)
 Plated Brass Contact
 with TPA
 Sabre Double 433751001
 Crimp Terminal,
 Female, Double 18
 AWG, 4.57mm Max.
 Insulation Diameter,
 Reel Packaged, Tin
 (Sn) Plated Brass
 Contact with TPA
 Sabre Single Crimp 433752001
 Terminal, Female,
 18-20 AWG, 2.84mm
 Max. Insulation
 Diameter, Reel
 Packaged, Tin (Sn)
 Plated Brass Contact
 with TPA
 1.00mm Pitch Crimp 476341002
 Terminal for Slimline
 Serial ATA Power
 Cable Receptacle,
 0.38 μ m Gold (Au)
 Plating, Lead free
 4.00mm Pitch Board-500988000
 in Crimp Terminal
 50098, 18-22 AWG,
 Reel, for 51036
 Housing
 2.50mm Pitch Mizu- 501478000
 P25 Crimp Terminal,
 50147, Reel
 2.50mm Pitch Mizu- 501478100
 P25 Crimp Terminal,
 50147, Bag

2.50mm Pitch Mizu- P25 Crimp Terminal, 50148, Reel	<u>501488000</u>
2.50mm Pitch Mizu- P25 Crimp Terminal, 50148, Bag	<u>501488100</u>
2.00mm Pitch, iGrid Female Crimp Terminal, Female, Tin (Sn) Plating, 26-28 AWG, Reel	<u>5016481000</u>
Mighty-SPOX Crimp Terminal, 3.50mm Pitch, 18-24 AWG, Reel, Brass	<u>502179001</u>
Mighty-SPOX Crimp Terminal, 3.50mm Pitch, 18-24 AWG, Bag, Brass	<u>502179101</u>
CLIK-Mate and IllumiMate 1.25mm Pitch Wire-to-Board Crimp Terminal, Tin Plating, Reel	<u>5023810000</u>
CLIK-Mate 1.25mm Pitch Wire-to-Board Crimp Terminal, Gold Plating, Reel	<u>5023810010</u>
2.00mm Pitch CLIK- Mate Wire-to-Board Crimp Terminal, Reel	<u>5024380000</u>
2.00mm Pitch CLIK- Mate Wire-to-Board Crimp Terminal, Loose	<u>5024380100</u>
CP-2.5 Mini and CP-3.3 Crimp Terminal, Female, 22-28 AWG, Reel	<u>503978000</u>
CP-2.5 Mini and CP-3.3 Crimp Terminal, Female, 22-28 AWG, Bag	<u>503978100</u>
1.50mm Pitch, Pico- Lock Female Crimp Terminal, Gold (Au) Plating, 24-28 AWG, Reel	<u>5040520098</u>
1.50mm Pitch, Pico- Lock Female Crimp Terminal, Gold (Au) Plating, 30-32 AWG, Reel	<u>5040520298</u>
CP-6.5 Wire- to-Board Crimp Terminal, Female, 16-22 AWG, Reel	<u>505978000</u>
CP-6.5 Wire- to-Board Crimp Terminal, Female, 20-26 AWG, Reel	<u>505988000</u>
2.50mm Pitch Mini-Latch Crimp Terminal, Female,	<u>508028000</u>

Phosphor Bronze, Reel	
2.50mm Pitch Mini-Latch Crimp Terminal, Female, Phosphor Bronze, Bag	<u>508028100</u>
2.50mm Pitch Mini-Latch Crimp Terminal, Female, Brass, Reel	<u>508029001</u>
2.50mm Pitch Mini-Latch Crimp Terminal, Female, Brass, Bag	<u>508029101</u>
DuraClik ISL Wire- to-Board Crimp Receptacle Terminal, Female, AVSS 0.3 Square Wire, Tin	<u>5601240101</u>
2.00mm Pitch Crimp Terminal 56086, Male, 22-28 AWG, Reel, for 51227 Housing	<u>560868000</u>
2.00mm Pitch Crimp Terminal 56086, Male, 22-28 AWG, Bag, for 51227 Housing	<u>560868100</u>
2.00mm Pitch Crimp Terminal, Female, 22-28 AWG, Copper Alloy, Reel	<u>561349000</u>
2.00mm Pitch Crimp Terminal, Female, 22-28 AWG, Copper Alloy, Bag	<u>561349100</u>
2.00mm Pitch Crimp Terminal, Female, 22-28 AWG, Reel	<u>593708000</u>
2.00mm Pitch Crimp Terminal, Female, 22-28 AWG, Bag	<u>593708100</u>
1.27mm Pitch Serial ATA Crimp Terminal for Power Cable Receptacle, Gold (Au) Flash Plating, with Reel Direction - Type 1, Lead free	<u>675810000</u>
1.27mm Pitch Serial ATA Crimp Terminal for Power Cable Receptacle, Gold (Au) Flash Plating, with Reel Direction - Type 2, Lead free	<u>675810010</u>
1.27mm Pitch Serial ATA Crimp Terminal for Power Cable Receptacle, 0.76µm Gold (Au) Plating, with Reel Direction - Type 2, Lead free	<u>675810011</u>

Pico-EZmate Female 781720410
Crimp Terminal, Gold
(Au) over Nickel
Plating 0.10µm,
28-30 AWG, Reel
Pico-EZmate Female 781720411
Crimp Terminal, Gold
(Au) over Nickel
Plating 0.10µm,
28-30 AWG, Reel
1.50mm Pitch, Pico- 874210000
SPOX Female Crimp
Terminal, Tin(Sn)
Plating, 24-26 AWG,
Reel
1.50mm Pitch, Pico- 874210002
SPOX Female Crimp
Terminal, Gold (Au)
Plating, 24-26 AWG,
Reel
1.50mm Pitch, Pico- 874210100
SPOX Female Crimp
Terminal, Pre-Plated
Tin (Sn), 26-30
AWG, Reel
1.50mm Pitch, Pico- 874210102
SPOX Female Crimp
Terminal, Gold (Au)
Plating, 26-30 AWG,
Reel
High Normal Force 945180100
Tabs, Unplated
Brass, AWG 18-20
High Normal Force 945180101
Tabs, Tin Plated
Brass, AWG 18-20
High Normal Force 945180201
Tabs, Tin Plated
Brass, AWG 14-18

This document was generated on 06/26/2021

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION