

Sealing frame - CES-B16-SFFS-PLBK - 0801659

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Sealing frame with screw locking, size B16, with flat gasket, for 8 small sleeves

Product Description

Including flat gasket; mounting screws not supplied as standard



Key Commercial Data

| | |
|--------------------------------------|----------|
| Packing unit | 1 pc |
| Weight per Piece (excluding packing) | 140.0 g |
| Custom tariff number | 85472000 |
| Country of origin | Poland |

Technical data

Dimensions

| | |
|--------|---------|
| Length | 120 mm |
| Width | 58.5 mm |
| Height | 20 mm |

Ambient conditions

| | |
|---------------------------------|-------------------|
| Ambient temperature (operation) | -40 °C ... 120 °C |
|---------------------------------|-------------------|

General

| | |
|--|---|
| Product description | Including flat gasket; mounting screws not supplied as standard |
| Frame type | Sealing frame |
| Material | PA |
| Flammability rating according to UL 94 | V0 |
| Color | black |
| Torque | 2 Nm ... 4 Nm (Locking screw) |

Sealing frame - CES-B16-SFFS-PLBK - 0801659

Technical data

General

| | |
|---------------------------|---|
| Installation instructions | M4 locking screw with 3 mm Allen screw head, 2 ... 4 Nm torque, 1 large sleeve requires the space of 4 small sleeves, mounting screw: M4 (ISO 4762/DIN 912), 1.8 Nm torque |
| | Leak-tightness is guaranteed with underwall and perpendicular mounting; the flat gasket should be inserted between the wall and the sealing frame in the case of wall mounting. |

Standards and Regulations

| | |
|--|-----|
| Connection in acc. with standard | CUL |
| Flammability rating according to UL 94 | V0 |

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.0 | 23110102 |
| eCl@ss 4.1 | 23110102 |
| eCl@ss 5.0 | 23110102 |
| eCl@ss 5.1 | 23110102 |
| eCl@ss 6.0 | 23110102 |
| eCl@ss 7.0 | 23110102 |
| eCl@ss 8.0 | 27142421 |

ETIM

| | |
|----------|----------|
| ETIM 3.0 | EC001121 |
| ETIM 4.0 | EC002498 |
| ETIM 5.0 | EC000211 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 27113201 |
| UNSPSC 7.0901 | 27113201 |
| UNSPSC 11 | 27113201 |
| UNSPSC 12.01 | 27113201 |
| UNSPSC 13.2 | 27113201 |

Approvals

Approvals

Approvals

UL Recognized / cUL Recognized / GL / cULus Recognized


Sealing frame - CES-B16-SFFS-PLBK - 0801659

Approvals

Ex Approvals


Approvals submitted

Approval details

UL Recognized 

cUL Recognized 

GL

cULus Recognized 

Accessories

Accessories

Mounting material

Screw - CES-SFFS-H - 0801728



M4 replacement screw with 4 mm Allen screw head for sealing frame with screw locking

Screwdriver tools

Sealing frame - CES-B16-SFFS-PLBK - 0801659

Accessories

Screwdriver - SF-M BH - 1212070



Bit screwdriver, with 1/4" quick-action chuck, handle length 119 mm, 2-component handle, with non-slip grip, suitable for bits according to DIN 3126-C 6.3 and E 6.3/ISO 1173, magnetic

Screwdriver - SF-BIT-HEX 3-50 - 1212647



Screw bit, hexagon, E6.3-1/4" drive, size: Hex 3 x 50 mm, hardened, suitable for holder according to DIN 3126-F6.3/ISO 1173

Seal


Flat gasket - CES-B16-WRG-BK - 0801726




Flat gasket made of NBR, size B16

Drawings

Dimensional drawing

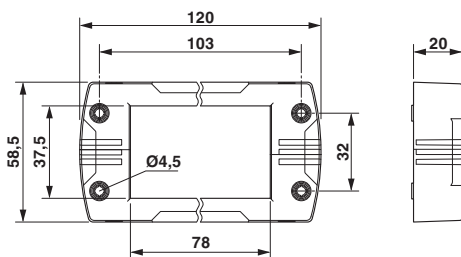

Dimensional drawing



Dimensional drawing

Panel cutout

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Phoenix Contact:

0801659