


**Plain Standard Screw:**  
**Thread:** M3.5 x 0.6 x 12mm  
**Head detail:** Recessed Pozi drive, Countersink head  
**Material:** SUS304-2B. uk standard 304S31  
**Finish:** Stainless steel

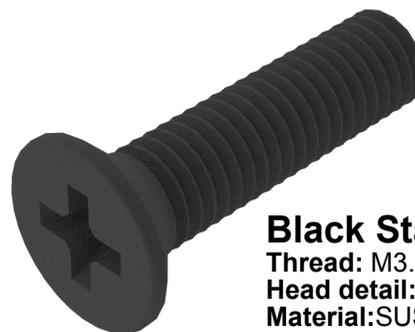

**Black Standard Screw:**  
**Thread:** M3.5 x 0.6 x 12mm  
**Head detail:** Recessed Pozi drive, Countersink head  
**Material:** SUS304-2B. uk standard 304S31  
**Finish:** Black Nickel Plating BS EN 150 4042:2000 3.5 microns

Manufacturer Part No	Description
000-035-004	Bag of 4 Plain Stainless Steel Screws
000-035-006	Bag of 6 Plain Stainless Steel Screws
000-035-100	Multipack 4 x 25 Plain Stainless Steel Screws

Manufacturer Part No	Description
000-086-004	Bag of 4 Black Plated Screws
000-086-006	Bag of 6 Black Plated Screws
000-086-100	Multipack 4 x 25 Black Plated Screws

Tel No. +44(0)1724 273200 Website [www.dem-uk.com](http://www.dem-uk.com)




PROPRIETARY AND CONFIDENTIAL  
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF  
 ALPHA 3 MANUFACTURING.  
 ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF  
 ALPHA 3 MANUFACTURING IS PROHIBITED.



UNLESS OTHERWISE SPECIFIED:  
 DIMENSIONS ARE IN MILLIMETRES.  
 TOLERANCE:  
**NO DECIMAL PLACES ±0.2mm**  
**1 DECIMAL PLACE ±0.1mm**  
**2 DECIMAL PLACES ±0.05mm**  
**ANGULAR TOLERANCE: ±1°**

FINISH	See note	DEBURR AND BREAK SHARP EDGES	DRAWN BY	SPB	TITLE	DEM Standard Lid Screw Specification
	-		APPROVED BY	WC	DRAWING NO.	035 & 086 Lid screw
	IF IN DOUBT ASK DO NOT SCALE DRAWING		THIRD ANGLE PROJECTION	SHEET 1 OF 1	ISSUE	01
MATERIAL	See Note			SCALE 6:1 A4		Release



SCALE 6:1	A4
035 & 086 Lid screw	
Release	