

- Back
 - PushPull Power
 - Flat Cable Connectors SEK
 - har-mik®
 - D-Sub
 - InduCom

● Applications

Product details

09 06 215 2811
Backplane connector


Type	Type H
Standard/Inverse	Standard
Contact gender	Female contacts
Size	Whole size
Number of contacts	15 poles
Contact arrangement	Rows z and d
Termination	Faston
Performance Class	Performance level 1 as per IEC 60603-2
Contacts	with contacts
Current	15 A max.
Clearance/ Creepage	4,5 / 8,0 mm min.
RoHS compliant	Yes

Inquiry

Available Downloads



Title	Format
-------	--------

X Kontaklanordnung/ contact arrangement





15 Kontakte
15 contacts

- = Kontaktposition belegt
= position with contact
- = Kontaktposition nicht belegt
= position without contact

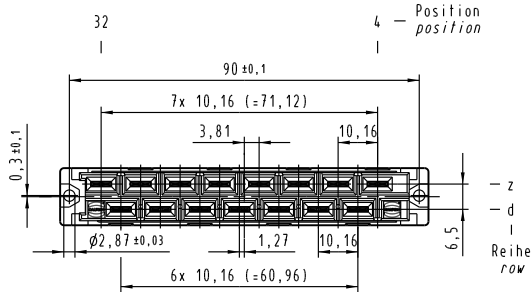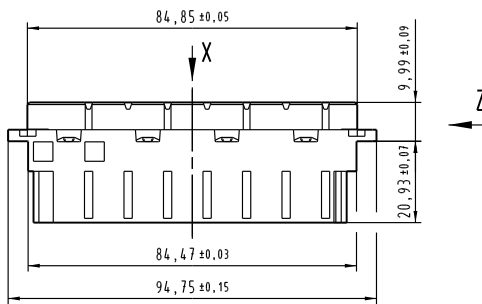

Z
2:1

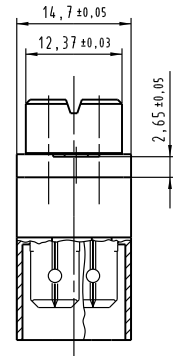

Kontakttoberfläche Ag
contact surface Ag

		All Dimensions in mm Original Size DIN A 3		Techn. Character.		IEC 60603-2		Nicht tolerierte Maß/Free size tolerances IEC 60603-2	

Blatt 1/1 page