

VS-SCRJ-HCS-FA-IP20

Order No.: 1654866

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1654866>

SCRJ fiber optic connector, IP20, duplex, with fast connection technology, for HCS fiber 200/230 µm, for individual wire diameter 2.9 mm

Ethernet**Commercial data**

EAN	4046356028837
Pack	1 pcs.
Customs tariff	85369010
Weight/Piece	0.0195 KG
Catalog page information	Page 213 (PC-2009)

Product notes

WEEE/RoHS-compliant since:
01/01/2003



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data**Mechanical characteristics**

Number of positions	2
Connection profile	SCRJ in acc. with IEC 61754-24
Fiber type	PCF fiber A3C
Fiber	200/230 µm

Ferrule diameter	2.50 mm
Insertion/withdrawal cycles	≥ 1000
Color	black
Ambient temperature (operation)	-20 °C ... 70 °C

Material data

Housing material	PBT
Ferrule material	Copper alloy
Ferrule holder color	Red
Degree of protection	IP20
Inflammability class acc. to UL 94	V0

Optical characteristics


Attenuation	≤ 1 dB (Insertion attenuation)
-------------	--------------------------------

Accessories

Item	Designation	Description
Tools		
2708876	PSM-HCS-KONFTOOL/SC-RJ	HCS DIY case for SCRJ quick mounting connector, including two SCRJ quick mounting connectors, stripping knife, stripping pliers, Aramid yarn scissors, fiber stripper, fiber cleaving tool and microscope

Drawings

Dimensioned drawing

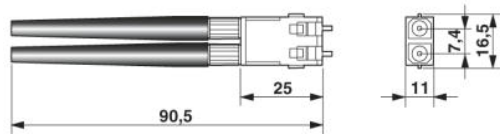

SCRJ plug connector IP20

Address

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 00
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>



© 2009 Phoenix Contact
Technical modifications reserved;