


VS-V1-F-LC-MNNA-PG9-C-S-B1

Order No.: 1420223

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1420223>

LC mounting frame, IP67, for bayonet interlocking, metal, with coupling for single mode, for round mounting cutout, with seal, without mounting screws

Commercial data	
GTIN (EAN)	 4 046356 540483
sales group	D521
Pack	1 pcs.
Customs tariff	85366990
Catalog page information	Page 337 (PC-2011)

Product notes

WEEE/RoHS-compliant since:
10/15/2009

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data	
Mechanical characteristics	
Number of positions	2
Number of slots	1
Insertion/withdrawal cycles	500
Connection method	LC

Ambient temperature (operation)	-40 °C ... 70 °C
---------------------------------	------------------

Material data


Housing material	Zinc die-cast
Seal material	NBR
Degree of protection	IP67

Electrical characteristics

Number of positions	2
---------------------	---

Diagrams/Drawings

Dimensioned drawing

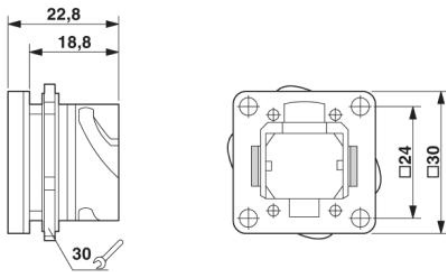

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2011 Phoenix Contact
Technical modifications reserved;