

VS-SCRJ-POF-FA-IP20

Order No.: 1654879



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1654879>

SCRJ fiber optic connector, IP20, duplex, with fast connection technology, for polymer fiber 980/1000 µm, for individual wire diameter 2.2 mm

Ethernet



Commercial data	
EAN	4046356028844
Pack	1 pcs.
Customs tariff	85366990
Weight/Piece	0.0167 KG
Catalog page information	Page 212 (PC-2009)

Product notes

WEEE/RoHS-compliant since:
01/01/2003



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Mechanical characteristics	
Number of positions	2
Connection profile	SCRJ in acc. with IEC 61754-24
Fiber type	POF fiber A4A
Fiber	980/1000 µm

Ferrule diameter	2.50 mm
Insertion/withdrawal cycles	≥ 1000
Color	black
Ambient temperature (operation)	-20 °C ... 70 °C

Material data

Housing material	PBT
Ferrule material	Copper alloy
Ferrule holder color	Blue
Degree of protection	IP20
Inflammability class acc. to UL 94	V0

Optical characteristics


Attenuation	≤ 1.5 dB (Insertion attenuation)
-------------	----------------------------------

Accessories

Item	Designation	Description
Tools		
1206146	KAMES LWL	Cable knife for polymer fiber, for external sheath
2744199	PSM-FO-STRIP	Stripping pliers for polymer fiber, for individual elements
1656673	VS-SCRJ-POF-POLISH	Refilling set for VS-SCRJ-POF-KONFTOOL-POLISH, consisting of two polishing discs and a polisher


Drawings

Dimensioned drawing

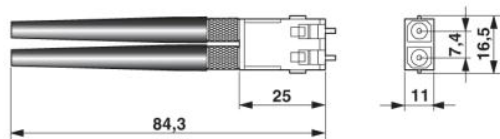

SCRJ plug connector IP20

Schematic diagram

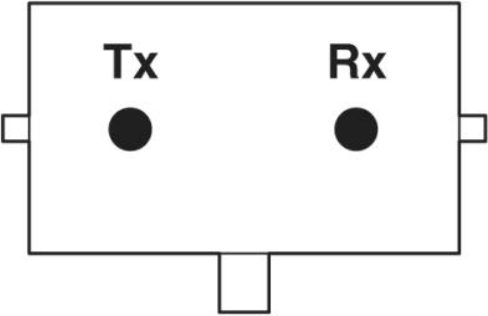

Address

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 00
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>



© 2009 Phoenix Contact
Technical modifications reserved;