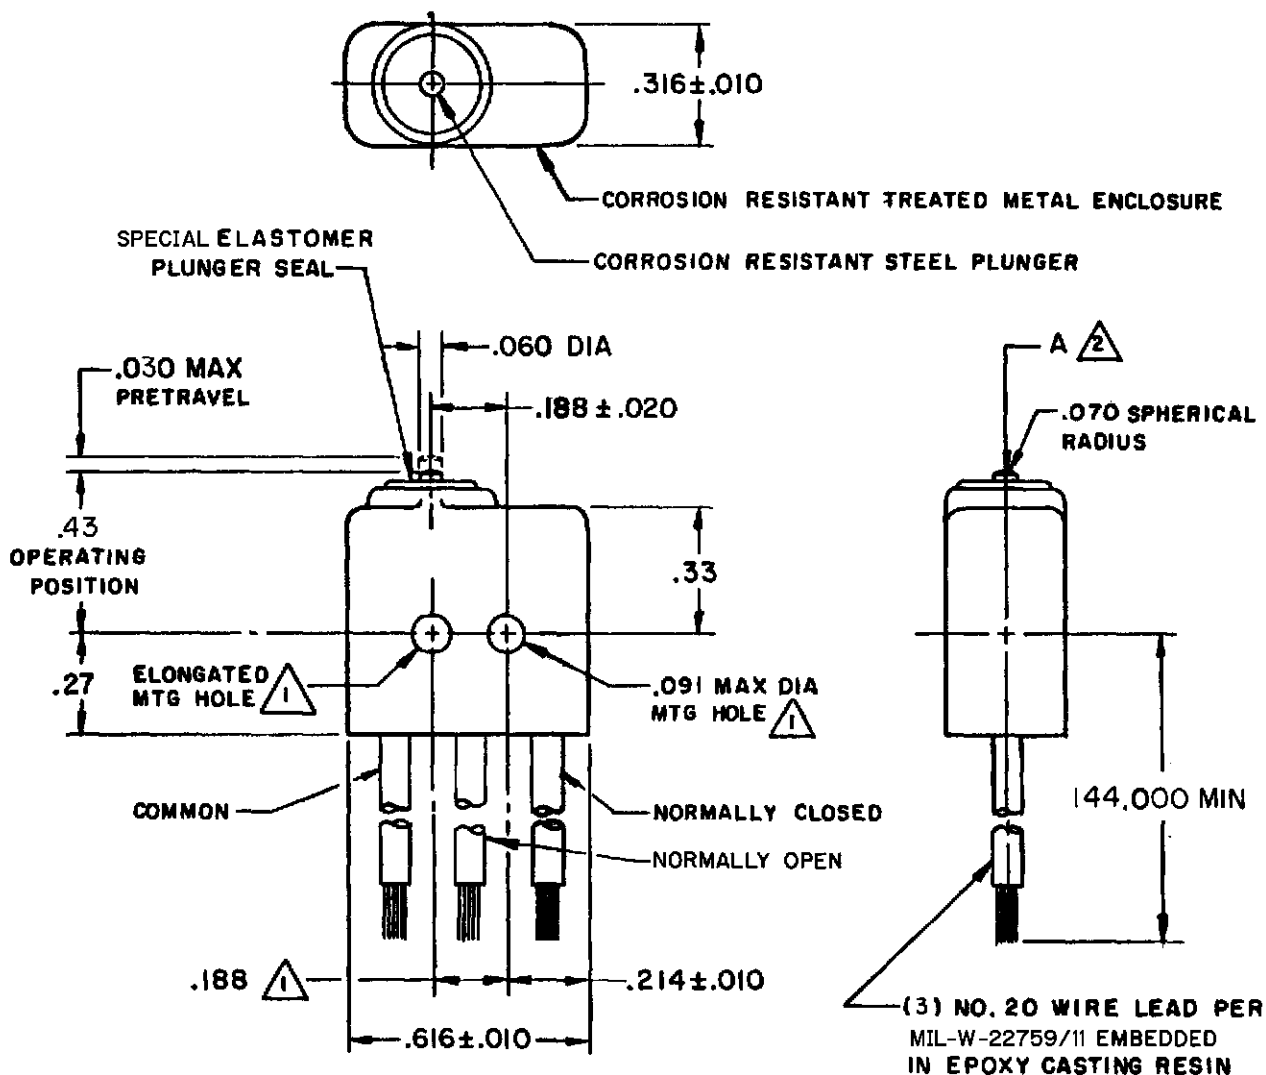


[illegible]


NOTES

- ① MOUNTING HOLES WILL ACCEPT .087 MAX DIA PINS OR SCREWS ON .188±.002 CENTERS
- ② ACTUATION IN LINE WITH ARROW "A" IS RECOMMENDED
- ③ WEIGHT OF SWITCH ONLY IS .16 OZ MAX. WEIGHT OF SWITCH WITH WIRE LEADS IS 3.7 OZ MAX
- 4 - FOR USE IN TEMPERATURE RANGE FROM -65°F TO +300°F

4 - FOR USE IN TEMPERATURE RANGE FROM -65°F TO $+300^{\circ}\text{F}$

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF
HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS	ELECTRICAL DATA		SCALE	DO NOT SCALE PRINT
	CONTACT ARRANGEMENT		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
	S P D T			
	28 VOLTS DC RATING		ONE PLACE (.0)	±.030
OPERATING FORCE - — — — - 9 OZ MAX	INDUCTIVE — — — —	SEA LEVEL — — — — 4 AMP	TWO PLACE (.00)	±.015
RELEASE FORCE — — — — - 2 OZ MIN		50,000 FT — — — — 2.5 AMP	THREE PLACE (.000)	±.005
PRETRAVEL — — — — — .004 MIN	RESISTIVE — — — —	SEA LEVEL — — — — 7 AMP	ANGLES	±
DIFFERENTIAL TRAVEL - — — — .005 MAX		50,000 FT — — — — 7 AMP	WEIGHT	3
OVERTRAVEL - — — — — .004 MIN				

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com