

Metal Switch Short Stroke



MCS 19 painted green



MCS 19 actuator painted red



MCS 19 stainless steel



Description

- Momentary switch available in version Standard, with Point Illumination, Lettering, varnished in different colours
- Assembly by mounting with nut -
- Pin connections, Pins with Soldering Aid or Clip for Pins

Approvals

- EMC: EMC directive 2004/108/EWG

Characteristics

- Housing and actuator material types: zinc die-cast with nickel plating or stainless steel
- Wide range of materials, colours, lettering, colours of illumination
- Switching voltage 48 VDC, switching current 125 mA
- Zinc die-cast for housing and actuator
 - For indoor use, no illumination, no lettering
- Stainless Steel for actuator
 - Optional point illumination and laser lettering with standard or customer-specific symbols
- Stainless Steel for housing and actuator
 - for use in harsh environments outdoors
- Varnished Version
 - Colour adjustments to customer housings possible, as standard: Signal colors red, green and yellow, optional: housing or actuator varnishing according to provided color specifications
 - the varnished actuators are sealed by transparent lacquer after the laser lettering

Weblinks

[html-datasheet](#), [General Product Information](#), [Approvals](#), [CE declaration of conformity](#), [RoHS](#), [CHINA-RoHS](#), [e-Shop](#), [CAD-Drawings](#), [Product News](#), [Detailed request for product](#)


Technical Data

Electrical Data	
Supply Voltage	LED operating data are listed in separate table
Contact Material Silver	
Switching Voltage	min. 4 VDC , max. 48 VDC
Switching Current	max. 125 mA
Rated Switching Capacity	1.2 W
Lifetime	1 million actuations at Rated Switching Capacity
Contact Resistance	< 50mΩ, < 150 mΩ after lifetime
Insulation Resistance	> 100 MΩ
Duration of Bounce	< 5 ms
Contact Material Gold	
Switching Voltage	min. 50 mVDC, max. 24 VDC
Switching Current	max. 80 mA
Rated Switching Capacity	0.36 W
Lifetime	1 million actuations at Rated Switching Capacity
Contact Resistance	< 50mΩ, < 150 mΩ after lifetime
Insulation Resistance	> 100 MΩ
Duration of Bounce	< 5 ms


Mechanical Data	
Actuating Force	3.7 N
Actuating Travel	0.4 mm,
Lifetime	1 million actuations
Shock Protection	IK 05 ,
Tightening Torque	0.4 Nm with Sealing Ring, 1.5 Nm without Sealing Ring
Climatical Data	
Operating Temperature	-20 to +60 °C
Storage Temperature	-20 to +60 °C
IP-Protection	IP 65 Front Side Contact Area, IP 40 Front Side mechanical,
Salt Spray Test (acc. to DIN 50021-SS)	24 h / 48 h / 96 h Residence Time
Other Data	
Contact Material	Ag / Au
Soldering Data	
Tinning	260 °C / 2sec according to DIN IEC 60068-2-20
Solderability	260 °C / 2 sec (IEC 68-2-20 Test Ta Method 1)
Resistance to Soldering Heat	260 °C / 5 sec (IEC 68-2-20 Test Tb Method 1A)
Material	
Housing	Stainless Steel 1.4305 / Zinc Die Casting Nickel Plated
Actuator unlettered	Zinc Die Casting Nickel Plated
Actuator lettered	Stainless Steel
Contact	CuZn37 2,5 µm Ag
Snap Dome	X 12 CrNi 177 gold plated
Socket	PA

Dimensions

MCS 19

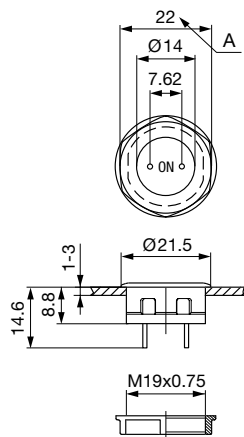


MCS 19 Connection Versions



Drawing 1: Pins
Drawing 2: Pins with Soldering Aid
Drawing 3: Clip for Pins

MCS 19 PI

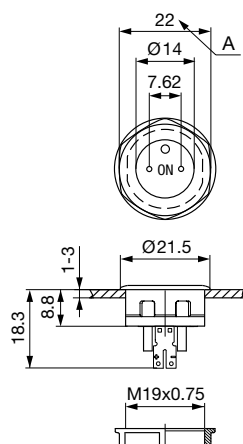

Legend:

Zinc Die Casting Version:

x = 1 mm without sealing ring


x = 2 mm with sealing ring

Stainless Steel Version:

x = 1 mm without sealing ring



x = 1,7 mm with sealing ring

Dimensions



Diagrams

MCS 19 PI Bi-colour-LED

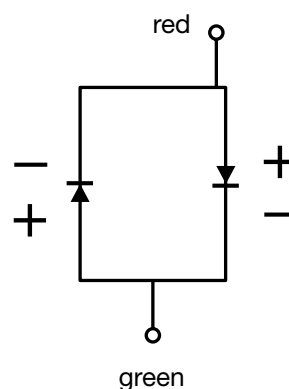

Point Illumination

Operating Data	Forward Current max.	Forward Voltage at 10 mA	Forward Voltage max.
LED red	30 mA	1.9 VDC	3.0 VDC
LED green	30 mA	2.1 VDC	3.0 VDC
LED yellow	30 mA	2.1 VDC	3.0 VDC
LED blue	20 mA	3.8 VDC	4.5 VDC
LED red/green	25 mA	2.0 VDC	2.5 VDC

Attention: Switches are delivered without series resistor.

Recommendation of series resistors for point illumination

LED-Color	I _D [mA]	I _{DMax} [mA]	U _D [V]*	U _{DMax} x [V]*	U _V [V]	R _V [Ω]	R _V ^{E24} [Ω]	P _V [W]**	U _V [V]	R _V [Ω]	R _V ^{E24} [Ω]	P _V [W]**	U _V [V]	R _V [Ω]	R _V ^{E24} [Ω]	P _V [W]
red	10	---	1,9	---	5	310	330	0,03	12	1010	1000	0,10	24	2210	2200	0,22
	---	30	---	3,0		67	68	0,06		300	300	0,27		700	750	0,63
	---	---	---	---		---	---	---		---	---	---		---	---	---
green	10	---	2,1	---		290	300	0,03		990	1000	0,10		2190	2200	0,22
	---	30	---	3,0		67	68	0,06		300	300	0,27		700	750	0,63
	---	---	---	---		---	---	---		---	---	---		---	---	---
Yellow	10	---	2,1	---		290	300	0,03		990	1000	0,10		2190	2200	0,22
	---	30	---	3,0		67	68	0,06		300	300	0,27		700	750	0,63
	---	---	---	---		---	---	---		---	---	---		---	---	---
blue	10	---	3,8	---		120	120	0,01		820	820	0,08		2020	2200	0,20
	---	20	---	4,5		25	27	0,01		375	390	0,15		975	1000	0,39
	---	---	---	---		---	---	---		---	---	---		---	---	---
red/green	10	---	2,0	---		300	300	0,03		1000	1000	0,10		2200	2200	0,22
	---	25	---	2,5		100	100	0,06		380	390	0,24		860	910	0,54
	---	---	---	---		---	---	---		---	---	---		---	---	---

I _D	LED-Forward Current [10mA]
I _{DMax}	LED-Forward Current max. [20mA/25mA/30mA]
U _D	LED-Forward voltage [10mA]
U _{DMax}	LED-Forward voltage max. [20mA/25mA/30mA]
R _V	Series Resistor (calculated)
R _V ^{E24}	Series Resistor (regarding E24-Resistor series)
P _V	Power dissipation concerning R _V (calculated)

Lettering

The last three digits in the order number define the lettering:

000	No Lettering
001-074	Standard Lettering
101-	Customized Lettering

Order Index Lettering

001 = A	021 = U	041 = ÷	061 = EIN
002 = B	022 = V	042 = *	062 = AUS
003 = C	023 = W	043 = =	063 = AUF
004 = D	024 = X	044 = #	064 = AB
005 = E	025 = Y	045 = ↔	065 = ON
006 = F	026 = Z	046 = †	066 = OFF
007 = G	027 = 0	047 = →	067 = UP
008 = H	028 = 1	048 = ←	068 = DOWN
009 = I	029 = 2	049 = ↓	069 = HIGH
010 = J	030 = 3	050 = ↑	070 = LOW
011 = K	031 = 4	051 = %	071 = ON/OFF
012 = L	032 = 5	052 = √	072 = START
013 = M	033 = 6	053 = CTRL	073 = RESET
014 = N	034 = 7	054 = RETURN	074 = 
015 = O	035 = 8	055 = SHIFT	075 = 
016 = P	036 = 9	056 = LOCK	076 = 
017 = Q	037 = +	057 = STOP	
018 = R	038 = -	058 = ENTER	
019 = S	039 = .	059 = BACK	
020 = T	040 = x	060 = LINE	

Lettering Colour of Laser Lettering

Material	Lettering Colour	
Stainless Steel	black	Filled letters

For further Lettering details see also weblink:

[General Product Information](#)

Variants

Terminal	Kontakte	Housing Material	Actuator Material	Lettering	Illumination	Color LED	Config. Code	Bestellnummer	
Pins	Ag	Zinc Diecasting	Zinc Diecasting	without Lettering	non-illuminated	-	MCS 19 Zinc	1241.2800	
Pins with Solde- ring Aid	Ag	Zinc Diecasting	Zinc Diecasting	without Lettering	non-illuminated	-	MCS 19 Zinc	1241.2801	
Clip for Pins	Ag	Zinc Diecasting	Zinc Diecasting	without Lettering	non-illuminated	-	MCS 19 Zinc	1241.2802	
Pins	Ag	Zinc Diecasting	Stainless Steel	without Lettering	non-illuminated	-	MCS 19 Zinc/Stainless Steel	1241.2805	
Pins	Ag	Zinc Diecasting	Stainless Steel	with Lettering	non-illuminated	-	MCS 19 Zinc/Stainless Steel	1241.2805.057	
Pins with Solde- ring Aid	Ag	Zinc Diecasting	Stainless Steel	without Lettering	non-illuminated	-	MCS 19 Zinc/Stainless Steel	1241.2806	
Clip for Pins	Ag	Zinc Diecasting	Stainless Steel	without Lettering	non-illuminated	-	MCS 19 Zinc/Stainless Steel	1241.2807	
Pins	Au	Zinc Diecasting	Zinc Diecasting	without Lettering	non-illuminated	-	MCS 19 Zinc	1241.2810	
Clip for Pins	Au	Zinc Diecasting	Zinc Diecasting	without Lettering	non-illuminated	-	MCS 19 Zinc	1241.2812	
Pins	Au	Zinc Diecasting	Stainless Steel	without Lettering	non-illuminated	-	MCS 19 Zinc/Stainless Steel	1241.2815	
Clip for Pins	Au	Zinc Diecasting	Stainless Steel	without Lettering	non-illuminated	-	MCS 19 Zinc/Stainless Steel	1241.2817	
Pins	Ag	Stainless Steel	Stainless Steel	without Lettering	non-illuminated	-	MCS 19 Stainless Steel	1241.2820	
Pins with Solde- ring Aid	Ag	Stainless Steel	Stainless Steel	without Lettering	non-illuminated	-	MCS 19 Stainless Steel	1241.2821	
Clip for Pins	Ag	Stainless Steel	Stainless Steel	without Lettering	non-illuminated	-	MCS 19 Stainless Steel	1241.2822	
Clip for Pins	Au	Stainless Steel	Stainless Steel	without Lettering	non-illuminated	-	MCS 19 Stainless Steel	1241.2827	
Pins with Solde- ring Aid	Ag	Stainless Steel	Stainless Steel	without Lettering	Point Illumination	red	MCS 19 PI	1241.2830	
Pins with Solde- ring Aid	Ag	Stainless Steel	Stainless Steel	without Lettering	Point Illumination	green	MCS 19 PI	1241.2831	
Pins with Solde- ring Aid	Ag	Stainless Steel	Stainless Steel	without Lettering	Point Illumination	yellow	MCS 19 PI	1241.2832	
Pins with Solde- ring Aid	Ag	Stainless Steel	Stainless Steel	without Lettering	Point Illumination	red / green	MCS 19 PI	1241.2833	
Pins with Solde- ring Aid	Ag	Zinc Diecasting	Stainless Steel	without Lettering	Point Illumination	red	MCS 19 PI	1241.2855	
Pins with Solde- ring Aid	Ag	Zinc Diecasting	Stainless Steel	without Lettering	Point Illumination	green	MCS 19 PI	1241.2856	
Pins with Solde- ring Aid	Ag	Zinc Diecasting	Stainless Steel	without Lettering	Point Illumination	yellow	MCS 19 PI	1241.2857	
Pins with Solde- ring Aid	Ag	Zinc Diecasting	Stainless Steel	without Lettering	Point Illumination	red / green	MCS 19 PI	1241.2858	
Pins with Solde- ring Aid	Ag	Zinc Diecasting	Stainless Steel	without Lettering	Point Illumination	blue	MCS 19 PIPI	1241.2859	
Pins with Solde- ring Aid	Ag	Zinc Dieca- sting, varnished	Stainless Steel	without Lettering	non-illuminated	-	MCS 19 Housing Var- nished	1241.2874.5	

Order numbers MCS 19, varnished versions (Colour of the switch housing or the actuator): 1241.28XX.A => A = 1 (yellow) / 3 (red) / 5 (green)

Order numbers MCS 19, illuminated versions (Point Illumination): 1241.2876.A.XXX.B and respectively 1241.2880.A.XXX.B => B = 1 (red) / 2 (green) / 3 (yellow) / 4 (blue) / 5 (red-green)

For Lettering versions see tables "Lettering" and "Order Index Lettering" to determine the symbol

Plastic nut with gasket are enclosed in the box.

 Most Popular.

Availability for all products can be searched real-time: <http://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

Packaging unit 20 in box with insert (20 pcs, with connecting terminal 10 pcs.)



- Actuating elements in ESD safe packaging
- Screw nuts and sealing rings in a bag (enclosed in the box)



- Actuating elements in ESD safe packaging
- Screw nuts and sealing rings in a bag (enclosed in the box)

Accessories

Description



Connecting Terminal MCS 19
Connecting Terminal