
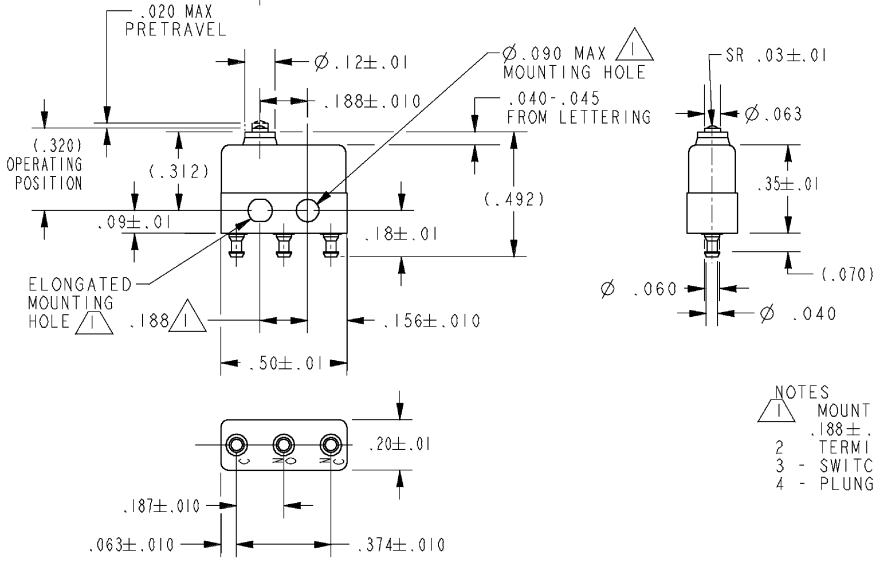


FO-55111-A

HONEYWELL
PART NUMBER
11SX95-T
PRODUCT CODE
VDJ2283

REV	DOCUMENT	CHANGED BY	CHECK
7	0038448	VS 28APR08	BLR

PLASTIC PLUNGER



- NOTES
- MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF $\phi .087$ MAX ON $.188 \pm .002$ CENTERS
 - TERMINALS ARE PLATED FOR SOLDERING
 - SWITCH WILL WITHSTAND TEMPERATURE OF 250°F
 - PLUNGER WILL BE FLUSH TO UNDERFLUSH AT FULL OVERTRAVEL

RELEASE NO.	PR-22044
REPLACES	X96329-SX

CHARACTERISTICS OPERATING FORCE - - - 6 OZ MAX RELEASE FORCE - - - 1/2 OZ MIN DIFFERENTIAL TRAVEL - - - .003 MAX OVERTRAVEL - - - .010 MIN	ELECTRICAL DATA CONTACT ARRANGEMENT S.P.D.T. 28 VOLTS DC RATING 115 VOLTS AC, 60 CPS SEA LEVEL 50,000 FT SEA LEVEL INDUCTIVE 3 AMP 2 AMP 5 AMP RESISTIVE 5 AMP 4 AMP 5 AMP	DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± ONE PLACE .X ± TWO PLACE .XX ± THREE PLACE .XXX ± FOUR PLACE .XXXX ± ANGLES ±	DRAWN SPK 12FEB08 CHECK RJ 12FEB08	Honeywell TITLE SWITCH - BASIC
			INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY	
APPROVALS KEMA CE 5A 250 V - T125 5E4 CE UL CSA 5A 250 VAC BRAND L4L			THIRD ANGLE PROJECTION 	RASTER SCALE - WEIGHT: .003 LB MAX SHEET 1 OF 1