


## 1571630-2 Product Details

[Live Product Chat](#)

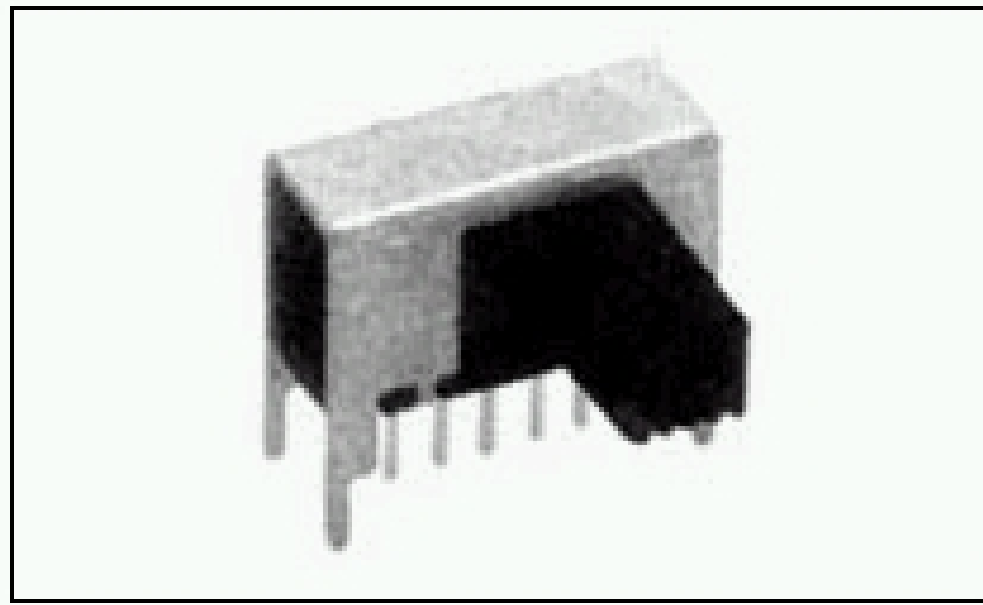

### 1571630-2

TE Part Number: 1571630-2

✔ [Active](#)

[Add to Part List](#)

### Slide Switches

✔ [Always EU RoHS/ELV Compliant \(Statement of Compliance\)](#)

#### Product Highlights:

- Number of Positions = 2
- Double Pole - Double Throw Configuration (Pole-Throw)
- Actuator Style = Extended, Side
- Actuator Color = Black
- MSS Series

[View all Features](#) | [Find Similar Products](#)

### Quick Links

- ▶ [Check Pricing & Availability](#)
- ▶ [Search for Tooling](#)
- ▶ [Product Feature Selector](#)
- ▶ [Contact Us About This Product](#)

### Documentation & Additional Information

#### Product Drawings:

- [SLIDE SWITCH, MSS 2250R SERIES, DP-DT, RIGHT ANGLE](#) (PDF, English)

#### Catalog Pages/Data Sheets:

- None Available

#### Product Specifications:

- None Available

#### Application Specifications:

- None Available

#### Instruction Sheets:

- None Available

#### CAD Files:

- None Available

#### Additional Information:

- [Product Line Information](#)

#### Related Products:

- [Tooling](#)

[List all Documents](#)

### Product Features (Please use the Product Drawing for all design activity)

#### Product Type Features:

- [Number of Positions](#) = 2
- Configuration (Pole-Throw) = Double Pole - Double Throw
- Actuator Style = Extended, Side
- Mount Angle = Vertical
- Grade = Instrumentation
- Termination Type = PC
- PCB Retention Feature = Yes

#### Electrical Characteristics:

- Contact Rating = 300mA @ 125 VAC

#### Body Related Features:

- Actuator Color = Black
- Series = MSS
- Mount Style = Through-Hole
- PCB Tail Length (mm [in]) = 3.00 [0.118]
- PCB Retention Method = Guide Posts
- Actuator Length (mm [in]) = 9.50 [0.374]
- Actuator Material = Polyester
- Flammability Rating = UL 94V-0

#### Contact Related Features:

- Contact Plating = Silver

#### Configuration Related Features:

- Terminal Configuration = Standard
- Threaded Case = Without
- Number of Actuators = Single

#### Industry Standards:

- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Wave solder capable to 240°C, Wave solder capable to 260°C, Wave solder capable to 265°C
- RoHS/ELV Compliance History = Always was RoHS compliant

#### Identification Marking:

- Stamped Marking = With

#### Other:

- Brand = Alcoswitch