UNIT:MM

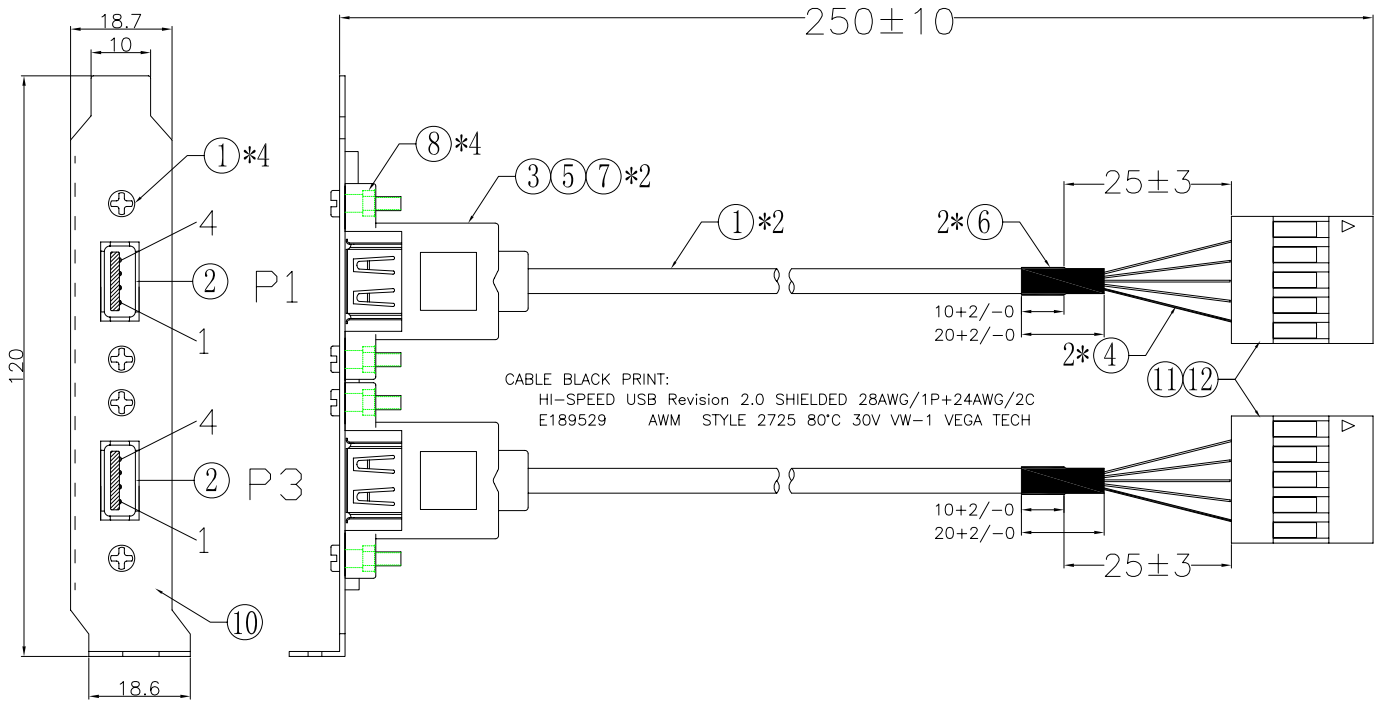

Electronic Test:

1.100% Test,(Open,Short,Miss Wire)
2.Contact Resistance:5 ohm max.
3.Insulation Resistance:5M ohm min.
4.Hi-Pot:300V DC/10ms

Pin Assignment

P1/P3		P2/P4
1	RED	1
2	WHITE	2
3	GREEN	3
4	BLACK	4
SHELL	DB	5

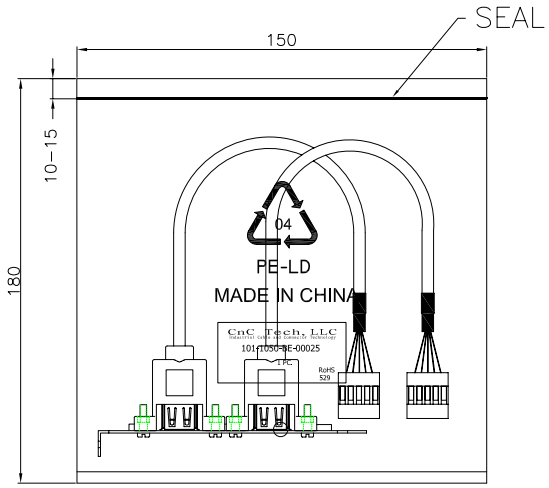

1PC/BAG

NO.	NAME	Q'TY	SPECIFICATION
⑭	PE BAG	1/10	CLEAR SIZE:280*330*0.05mm PRINT BLACK"MADE IN CHINA"+"10PCS"印生产周期,有透气孔.
⑬	PE BAG	1	CLEAR SIZE:150*180*0.05mm PRINT BLACK"MADE IN CHINA"+"1PC"印生产周期,有透气孔.
⑫	TERMINAL	10	杜邦 TER PH2.54mm MATERIAL:BRASSB G/F CRIMP TYPE
⑪	HSG	2	杜邦 HSG 1*5P PH:2.54mm INSULATOR COLOR:BLACK
⑩	BRACKET	1	BRACKET W/USB A-F DOUBLE NICKEL PLATED
⑨	SCREW	4	SCREW:2.8*14.1mm #4-40UNC NICKEL PLATED
⑧	NUT	4	HEX-NUT:4.75*1.65mm #4-40UNC NICKEL PLATED
⑦	IN JACKET	3.8g	INNER MOID:CLEAR LDPE (邦福模具:US-031 内)
⑥		2	H.S.T OD:5.0mm ,L=20mm,COLOR BLACK
⑤	TUBE	2	H.S.T OD:0.8mm ,L=8mm,COLOR BLACK
④		2	H.S.T OD:0.8mm ,L=30mm,COLOR BLACK
③	OUT JACKET	21.5g	OUTER MOLD:40P PVC COLOR:BEIGE(IV-29#) (邦福模具:US-031 外)
②	CONN	2	USB A/F SOLDER TYPE INSULATION WHITE.PIN G/F,SHELL-NI PLATED 短身 (CHHUSBAF24A)
①	CABLE	2	USB2.0 UL2725 28AWG*1P+24AWG*2C+AL/MY+DW+BD+JACKET COLOR:BEIGE(IV-29#) OD:4.7±0.15mm L=235+5/-0mm.

CnC Tech, LLC

Industrial Cable and Connector Technology

DRAWED BY	ZHONGHS	DARWING NO.	
CHECKED BY		CUSTOMER	
APPROVAL BY		ITEM NO.	101-1050-BE-00025
DECIDE BY		DATE	2012-02-16
VERSIONS/EDITEON	A/0	PROJECTION	