


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	NOTES
1	50-00400	Connector, stereo plug, 2.5xL19.6 mm, brass, nickel plated, molding style	1	
2	30-00179	Wire, 3C, 28 AWG, 3.8 mm, PVC 66A, shielded	1	black
4	24-00028	Overmold, PVC, black	1	

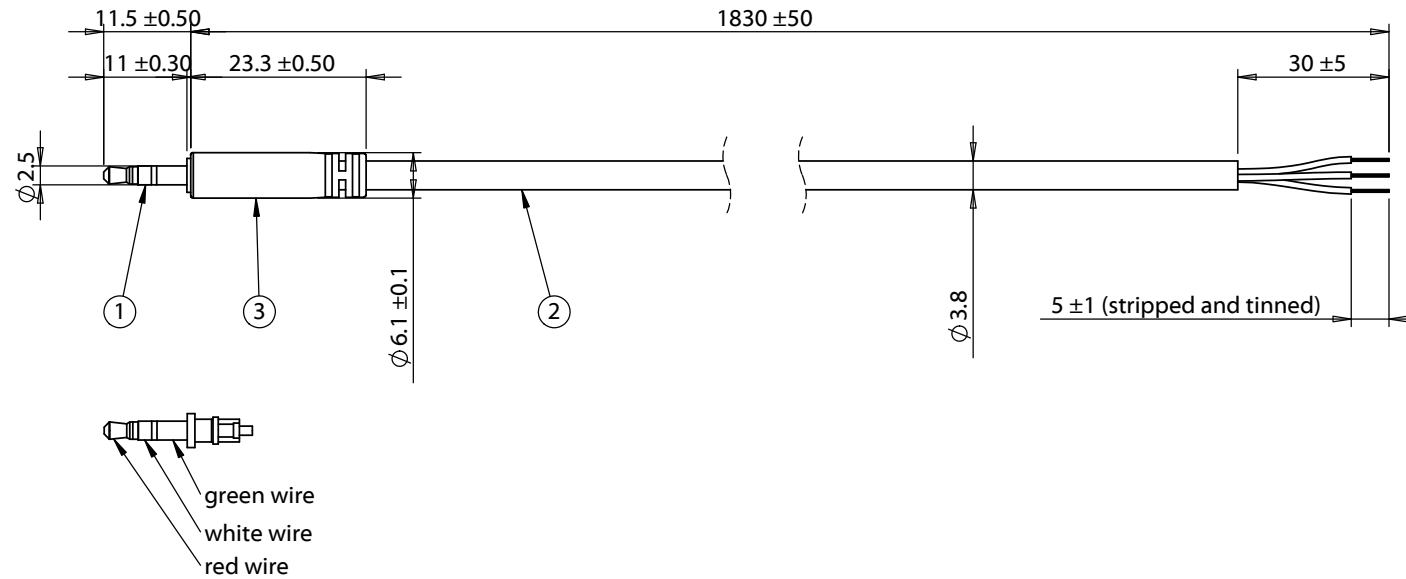

REVISION	DATE	DESCRIPTION	PREPARED:	NOTES	<h1>TENSILITY</h1> <p>20802 Sockeye Place #130 Bend, OR 97701 USA tel 541.323.3228 fax 541.323.4202 800 877.670.7118 www.tensility.com</p>		
A	5/24/10	Initial release		RoHS, REACH and Dodd-Frank Conflict Minerals compliant			
A1	9/6/11	updated specifications	VERIFIED:	Function test: no open, no reversed polarity, no short circuit, no INT	SIZE	PART NUMBER	
A2	3/28/12	updated wire part number			A	10-00342	
A3	9/17/12	updated connector to 50-00252	DIMENSIONS ARE IN MILLIMETERS	DESCRIPTION: Cable, 1830 mm, 2.5 mm 50-00400 slim stereo plug to 5 mm tinned, 28 AWG, 30-00179, shielded	SCALE: 1:1	WEIGHT:	SHEET 1 OF 1
A4	4/17/13	updated connector to 50-00349	TOLERANCES: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm				
A5	10/9/14	updated connector					