


Specifications:

| | |
|---------------------------|---|
| connector description (1) | 2.5xL20.2 mm, 4C audio plug, brass nickel plated, P/N 50-00007 |
| overmold (2) | inner: 30P, PVC, black; outer: 60P, PVC, black |
| wire description (4) | 4C, 28 AWG, 300V, 80C, 3.8 mm, PVC, 80P, shielded, P/N 30-00176 |
| cable outer diameter | Ø3.8 mm |
| cable color | black |
| cable length | 1830 ± 50 mm |
| twist tie (3) | black |


Notes:

Function test: no open, no reversed polarity, no short circuit, no INT
 RoHS compliant
 Hi-Pot test: 600 Vac, 0.5 mA, 1 second

Mechanical drawing:

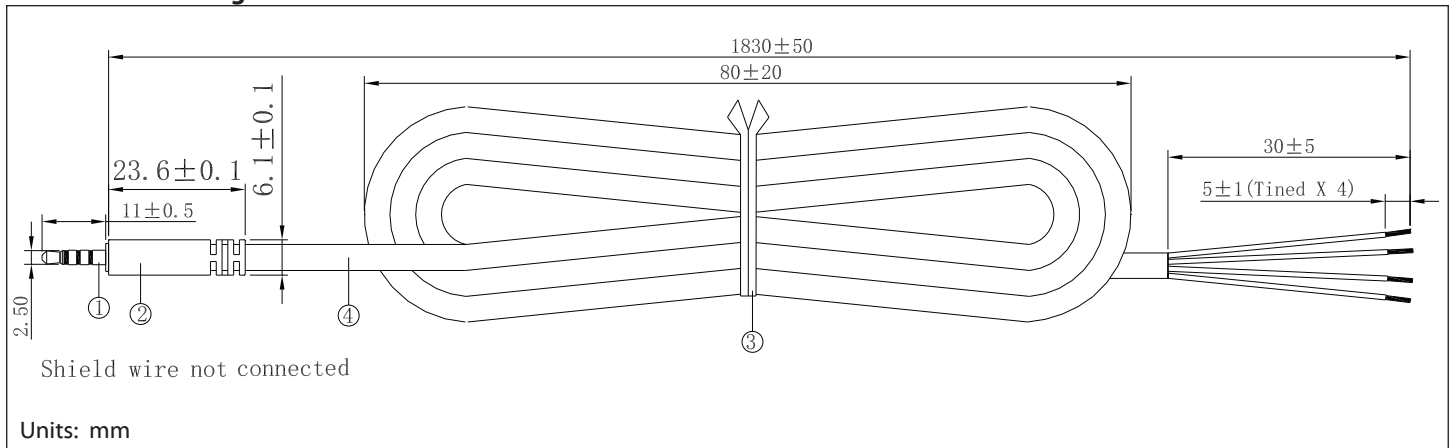

Wiring diagram:

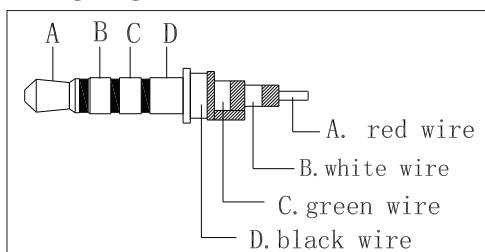

tolerance X: ±0.5 mm .X: ±0.3 mm .XX: ±0.05 mm
 applicable unless otherwise indicated in specification or on drawings
 Tensility International Corporation reserves the right to substitute
 parts which are functionally equivalent to the ones specified.

Initial

Date

Revision notes:

| Rev | Date | Description |
|-----|-------------------|--------------------------|
| A | May 10, 2010 | initial release |
| A1 | September 6, 2011 | updated specifications |
| A2 | March 28, 2012 | updated wire part number |
| | | |
| | | |

Specification Approval

Spec sign-off verifies that you have reviewed the entire specification, tested a sample of the product, and confirm that it meets your requirements. This specification reflects the part as it will be ordered. Orders will not be processed until the specification pages have been initialed and the approval page has been signed. This specification is confidential and is not to be transmitted without prior approval from Tensility.

Signature _____ Title _____

Name _____ Date _____

Company _____ Branch _____