


5x20mm / No. 198

This product is not recommended for new designs. Please refer to Littelfuse No. 239.



Dimensions (mm)

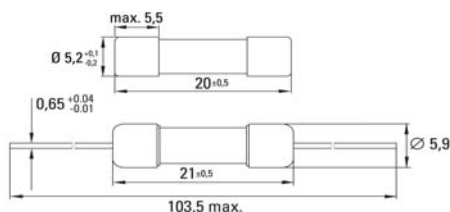

Optional Holders

UL 248-14, 250V, D

Time-Current Characteristic

Time Delay (D)

Standard

UL 248-14
CSA C22.2 No. 248.14

Approvals

UL Listed
CSA Certified

Features

Visual fault indication
Direct solderable or plug-in versions
Internationally approved
Worldwide availability

WebLinks

Further info see:

www.wickmanngroup.com

Further application info see fuseology:

www.wickmanngroup.com/download/fuseology.pdf

Specifications

Packaging

000: Bulk (1000 pcs.)
002: Bulk (20x10 pcs.)
043: With mounted holder - Tape/Reel (1250 pcs.) on request

Materials

Tube: Glass
End Caps: Nickel-plated brass
Optional Holders: Nickel-plated caps
Tin-plated copper wires

Operating Temperature

-25°C to +70°C (consider de-rating)

Climatic Category

-25°C/+70°C/21 days (EN 60068-1..3)

Stock Conditions

+10°C to +60°C
relative humidity ≤ 75% yearly average,
without dew, maximum value for 30 days-95%

Vibration Resistance

24 cycles at 15 min. each (EN 60068-6)
10 - 60Hz at 0.75mm amplitude
60 - 2000Hz at 10g acceleration

Solderability

260°C, ≤ 3 sec. (Wave)
350°C, ≤ 1 sec. (Hand)

Soldering Heat Resistance

260°C, 10 sec. (IEC 60068-2-20)

Marking

 , Current Rating, 250VAC, D, 198, Approvals

Unit Weight

1.1g (approx.)
2.0g (with leads)

Limits for Pre-arcing Time

| Rated Current | 1.35 x I _{Rated} | 2.0 x I _{Rated} |
|----------------|---------------------------|--------------------------|
| 80mA ... 3.00A | < 1h | 5s ... 120s |
| 3.50A | < 1h | 12s ... 120s |



Permissible continuous operating current is ≤ 75% at ambient temperature of 23°C (73.4°F).


| Rated Current | Amp Code | Voltage Rating | Breaking Capacity | Voltage Drop 1.0 x I _{Rated} max. (mV) | Power Dissipation 1.0 x I _{Rated} max. (W) | Melting Integral 10 x I _{Rated} min. (A ² s) | Approvals | |
|---------------|----------|----------------|-------------------|---|---|--|-----------|-----|
| | | | | | | | UL | CSA |
| 80mA | 0080 | 250V | | 2800 | 0.4 | 0.019 | • | • |
| 100mA | 0100 | 250V | | 2400 | 0.5 | 0.038 | • | • |
| 125mA | 0125 | 250V | | 2100 | 0.5 | 0.066 | • | • |
| 150mA | 0150 | 250V | | 1800 | 0.5 | 0.10 | • | • |
| 200mA | 0200 | 250V | | 1300 | 0.6 | 0.18 | • | • |
| 250mA | 0250 | 250V | | 1100 | 0.7 | 0.29 | • | • |
| 300mA | 0300 | 250V | | 1050 | 0.7 | 0.5 | • | • |
| 400mA | 0400 | 250V | | 850 | 0.8 | 1.0 | • | • |
| 500mA | 0500 | 250V | | 650 | 0.8 | 1.6 | • | • |
| 600mA | 0600 | 250V | | 550 | 0.8 | 2.7 | • | • |
| 700mA | 0700 | 250V | | 500 | 0.9 | 3.7 | • | • |
| 800mA | 0800 | 250V | | 400 | 0.9 | 5.6 | • | • |
| 1.00A | 1100 | 250V | | 350 | 1.0 | 9.5 | • | • |
| 1.25A | 1125 | 250V | | 300 | 1.0 | 15 | • | • |
| 1.60A | 1160 | 250V | | 270 | 1.1 | 25 | • | • |
| 2.00A | 1200 | 250V | | 235 | 1.1 | 46 | • | • |
| 2.50A | 1250 | 250V | | 215 | 1.2 | 83 | • | • |
| 3.00A | 1300 | 250V | | 200 | 1.3 | 110 | • | • |
| 3.50A | 1350 | 250V | | 200 | 1.3 | 180 | • | • |
| | | | 35A / 250VAC | | | | | |
| | | | 10kA / 125VAC | | | | | |
| | | | 50-60Hz | | | | | |
| | | | cos φ = 0.7-0.8 | | | | | |
| | | | | | | | | |
| | | | 100A / 250VAC | | | | | |
| | | | 10kA / 125VAC | | | | | |
| | | | 50-60Hz | | | | | |
| | | | cos φ = 0.7-0.8 | | | | | |

Order Information

| Qty. | Order-Number | Series | Amp Code | Packaging |
|------|--------------|--------|----------|-----------|
| | | 198 | | |

Specifications are subject to change without notice

5x20mm / No. 198

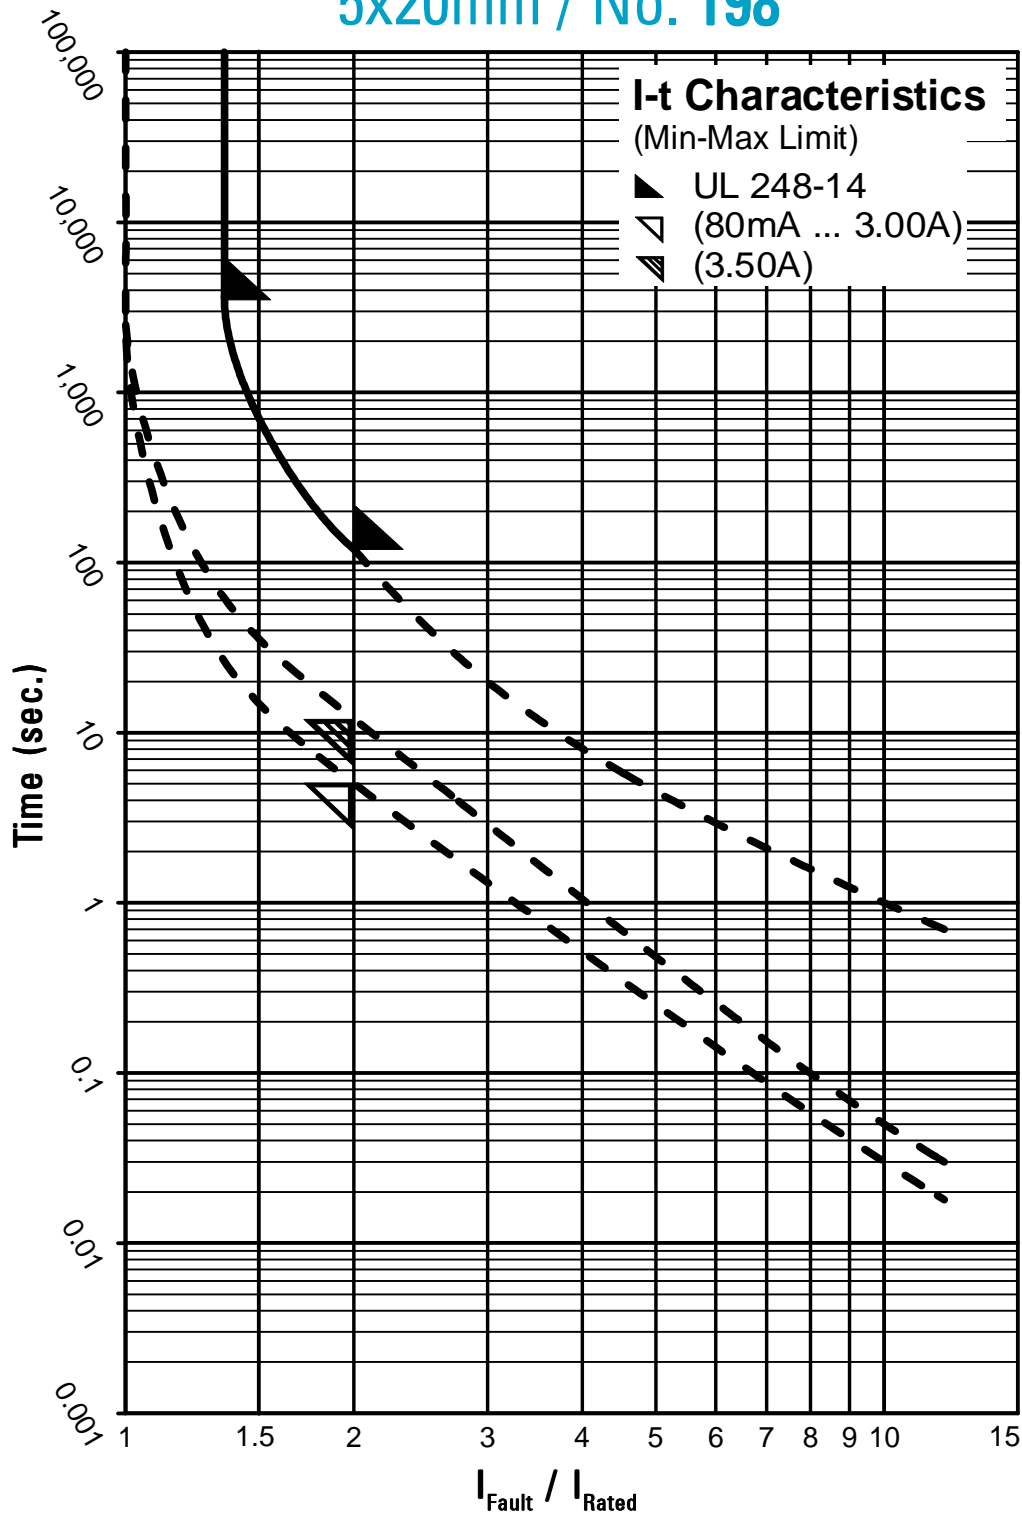

Contact WICKMANN for individual I-t curves

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Littelfuse:

[1980200000](#) [1980200001](#) [19802000021](#) [1980250000](#) [19802500001](#) [19802500021](#) [1980300000](#) [19803000001](#)
[19803000021](#) [1980400000](#) [19804000001](#) [19804000021](#) [1980500000](#) [19805000001](#) [19805000021](#) [1980600000](#)
[19806000001](#) [19806000021](#) [19806000431](#) [1980700000](#) [19807000001](#) [19807000021](#) [1980800000](#) [19808000001](#)
[19808000021](#) [1981100000](#) [19811000001](#) [19811000021](#) [1981125000](#) [19811250001](#) [19811250021](#) [1981160000](#)
[19811600001](#) [19811600021](#) [1981200000](#) [19812000001](#) [19812000021](#) [1981250000](#) [19812500001](#) [19812500021](#)
[19812500431](#) [1981300000](#) [19813000001](#) [19813000021](#)