


**SAC-5P-M12FS CAN TR**

Order No.: 1529344

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1529344>

Terminating resistor CANopen/DeviceNet™ M12

**Commercial data**

GTIN (EAN)	 4 017918 989538
sales group	D199
Pack	5 pcs.
Customs tariff	85444290

**Product notes**WEEE/RoHS-compliant since:  
12/07/2005

<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

**Technical data****General data**

Rated current at 40°C	4 A
Rated voltage	60 V
Number of positions	5


**General characteristics**

Coding	A - standard
--------	--------------

Surge voltage category	II
Pollution degree	3
Degree of protection	IP65/IP67/IP69K
Insertion/withdrawal cycles	≥ 100
Contact material	CuSn
Contact surface material	Ni/Au
Contact carrier material	TPU GF
Material of grip body	TPU, hardly inflammable, self-extinguishing
Material, knurls	Zinc die-cast, nickel-plated
Sealing material	NBR
Status display	No


### Diagrams/Drawings

#### Dimensioned drawing

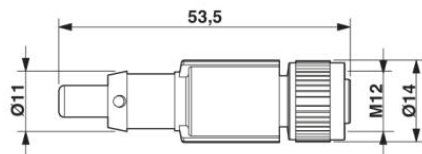

M12 x 1 female connector, straight


#### Circuit diagram

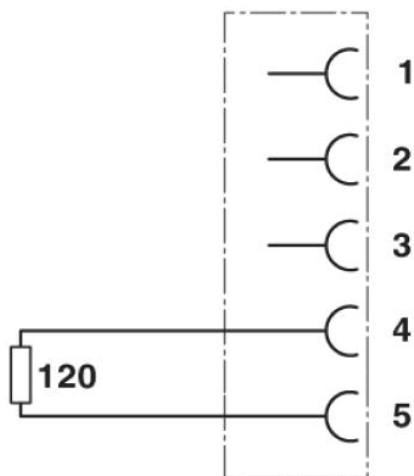

Internal wiring of connections

Schematic diagram

---

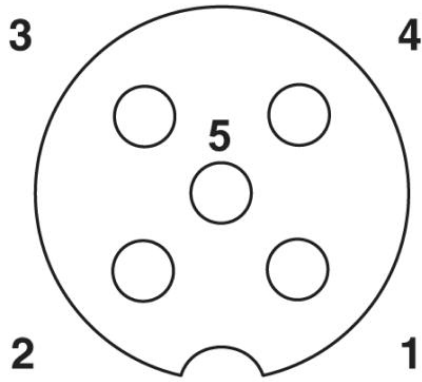

Pin assignment M12 socket, 5-pos., A-coded, socket side view

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2011 Phoenix Contact  
Technical modifications reserved;