


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	NOTES
1	50-00402	Connector, stereo plug, 3.5xL20.5 mm, brass, nickel plated, white, molding style	1	
2	30-00180	Wire, 3C, 28 AWG, 3.8 mm, PVC, 66A, shielded, white	1	
4	24-00028	Overmold, PVC, white	1	

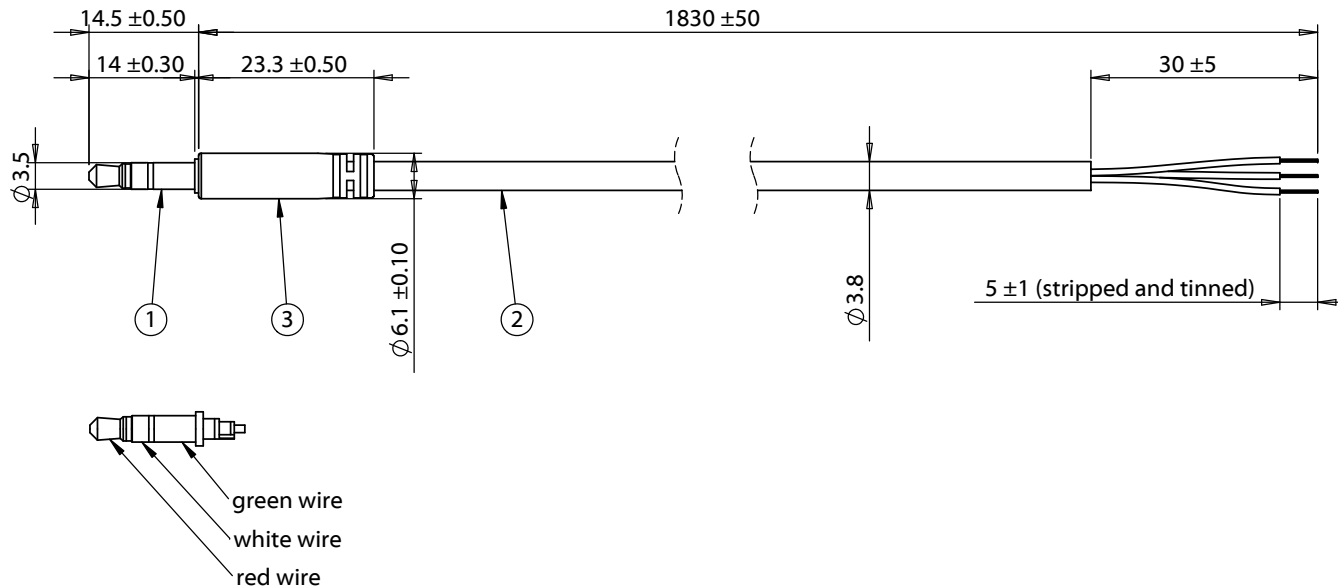

REVISION	DATE	DESCRIPTION	PREPARED:	NOTES	<h1>TENSILITY</h1> <p>20802 Sockeye Place #130 Bend, OR 97701 USA tel 541.323.3228 fax 541.323.4202 800 877.670.7118 www.tensility.com</p>		
A	4/16/10	Initial release		RoHS, REACH and Dodd-Frank Conflict Minerals compliant			
A1	9/6/11	updated specification	VERIFIED:	Function test: no open, no reversed polarity, no short circuit, no INT	SIZE	PART NUMBER	
A2	3/28/12	updated wire part number	DIMENSIONS ARE IN MILLIMETERS		A	10-00336	
A3	3/28/14	updated connector	TOLERANCES: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	DESCRIPTION: Cable, 1830 mm, 3.5 mm 50-00402 slim stereo plug to 5 mm tinned, 28 AWG, 30-00180, shielded, white	SCALE: 1:1	WEIGHT:	SHEET 1 OF 1