

Series 14002

Barrier Terminal Blocks

SPECIFICATIONS

Rating: 115A, 600V

Poles: 2-6 poles

Wire Range: #2-14 AWG CU / #2-8 AWG AL

Torque Rating: 40-50 in-lb.

Operating Temperature: 150°C

Marking: Marking strip optional, consult factory.

Options: CP = pressure plate, rated 60A, 600V


Q = quick-connect, rated 50A, 600V

To order options, enter letter code in front of

Part No.: ie; CP14002-2

Breakdown Voltage:

Agency Information: UL/CSA; CE Certified

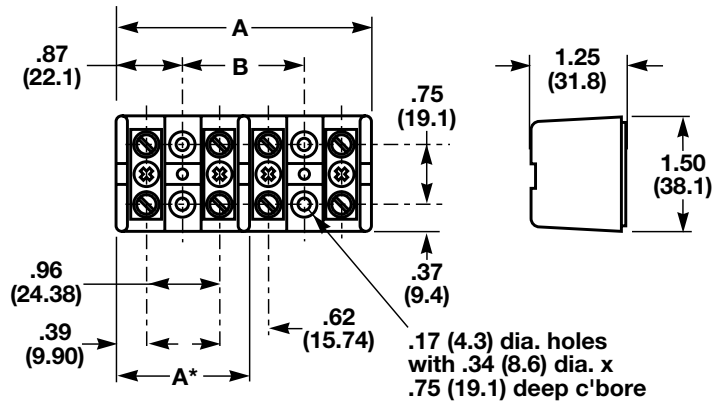

Part Number	A	B
14002-2	1.75	-
14002-3	2.37	-
14002-4	3.34	1.59
14002-5	3.96	2.21
14002-6	4.59	2.84

* Dimensions in inches. To convert to millimeters, multiply by 25.4.

Note: "A" dimension for 14002-2 & 14002-3 only. (14002-2 & 14002-3 have only two mounting holes.)