


REV. 0

DCO 15971

COIL: @ 25°C	
RESISTANCE	140 OHMS ±10%
NOMINAL VOLTAGE	12.0 VDC
MUST OPERATE	6.3 VDC
MUST RELEASE	0.75 VDC

ENVIRONMENT:	
VIBRATION	10 CPS TO 2000 CPS @ 20 g's
SHOCK	100 g's 6 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C
NOTES:	OPERATE 5.0 MS MAX. RELEASE 5.0 MS MAX. CONTACT BOUNCE 2 MS MAX.

CUSTOMER DATA SHEET

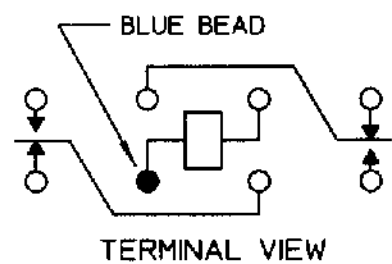

CONTACT RATING: LOW LEVEL TO 5A
30 VDC RESISTIVE 100,000 OPERATIONS

DR. B.D. 12/10/99 CK. 69H 12/10/99

COMMUNICATIONS INSTRUMENTS, INC.

CUST. HI-G
CUST. NO. 2BN-4D-112 REV.

FW5A RELAY

FW5A1367S01