

D-SUB cable - VS-09-DSUB-20-LI-1,0 - 1656233

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Assembled D-SUB cable, shielded, 9-pos., stranded (7-wire), cable color: RAL 7000 (gray), secured using 4-40 UNC thread, IP20 protection, head 1 with socket shell 1 and straight cable outlet, head 2 with pin shell 1 and straight cable outlet, length: 1 m



Key Commercial Data

Packing unit	1 pc
GTIN	 4 046356 029711
Weight per Piece (excluding packing)	96.3 g
Custom tariff number	85444290
Country of origin	China

Technical data

Mechanical characteristics

Number of positions	9
Insertion/withdrawal cycles	≥ 50
Cable exit	straight
Length of cable	1 m

Ambient conditions

Ambient temperature (operation)	0 °C ... 70 °C
Degree of protection	IP20

Material data

Housing material	PVC
Contact material	Copper alloy
Contact surface material	Gold-plated
Outer sheath, material	PVC

Electrical characteristics

Number of positions	9
Rated current	1 A

D-SUB cable - VS-09-DSUB-20-LI-1,0 - 1656233

Technical data

Electrical characteristics

Overvoltage category	III
Degree of pollution	2

Classifications

eCl@ss

eCl@ss 4.0	27060306
eCl@ss 4.1	27060306
eCl@ss 5.0	27061801
eCl@ss 5.1	27061801
eCl@ss 6.0	27061801
eCl@ss 7.0	27061801
eCl@ss 8.0	27060390

ETIM

ETIM 2.0	EC000830
ETIM 3.0	EC001855
ETIM 4.0	EC001855
ETIM 5.0	EC001408

UNSPSC

UNSPSC 6.01	31261501
UNSPSC 7.0901	31261501
UNSPSC 11	31261501
UNSPSC 12.01	31261501
UNSPSC 13.2	31261501

Approvals

Approvals

Approvals

EAC / EAC

Ex Approvals

Approvals submitted

Approval details

D-SUB cable - VS-09-DSUB-20-LI-1,0 - 1656233


Approvals

EAC


EAC

Drawings


Dimensional drawing

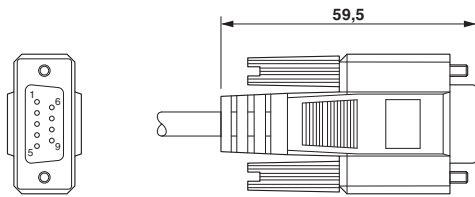


Dimensional drawing

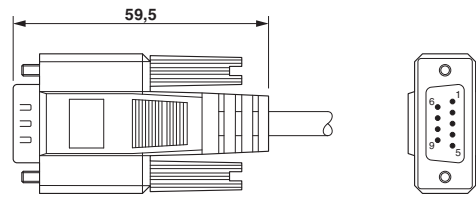

Circuit diagram

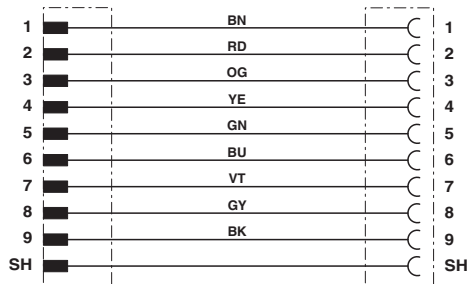

Schematic diagram



Schematic diagram

