

## Silicon Standard Recovery Diode

$V_{RRM} = 400\text{ V} - 600\text{ V}$

$I_F = 15\text{ A}$


### Features

- High Surge Capability
- Types from 400 V to 600 V  $V_{RRM}$
- Not ESD Sensitive

### Note:

1. Standard polarity: Stud is cathode.
2. Reverse polarity (R): Stud is anode.
3. Stud is base.

DO-5 Package



Maximum ratings, at  $T_j = 25\text{ }^{\circ}\text{C}$ , unless otherwise specified ("R" devices have leads reversed)

| Parameter                                            | Symbol     | Conditions                                                 | 1N3212 (R) | 1N3213 (R) | 1N3214 (R) | Unit               |
|------------------------------------------------------|------------|------------------------------------------------------------|------------|------------|------------|--------------------|
| Repetitive peak reverse voltage                      | $V_{RRM}$  |                                                            | 400        | 500        | 600        | V                  |
| RMS reverse voltage                                  | $V_{RMS}$  |                                                            | 280        | 350        | 420        | V                  |
| DC blocking voltage                                  | $V_{DC}$   |                                                            | 400        | 500        | 600        | V                  |
| Continuous forward current                           | $I_F$      | $T_C \leq 150\text{ }^{\circ}\text{C}$                     | 15         | 15         | 15         | A                  |
| Surge non-repetitive forward current, Half Sine Wave | $I_{F,SM}$ | $T_C = 25\text{ }^{\circ}\text{C}$ , $t_p = 8.3\text{ ms}$ | 297        | 297        | 297        | A                  |
| Operating temperature                                | $T_j$      |                                                            | -55 to 150 | -55 to 150 | -55 to 150 | $^{\circ}\text{C}$ |
| Storage temperature                                  | $T_{stg}$  |                                                            | -55 to 150 | -55 to 150 | -55 to 150 | $^{\circ}\text{C}$ |

Electrical characteristics, at  $T_j = 25\text{ }^{\circ}\text{C}$ , unless otherwise specified

| Parameter             | Symbol | Conditions                                                | 1N3212 (R) | 1N3213 (R) | 1N3214 (R) | Unit          |
|-----------------------|--------|-----------------------------------------------------------|------------|------------|------------|---------------|
| Diode forward voltage | $V_F$  | $I_F = 15\text{ A}$ , $T_j = 25\text{ }^{\circ}\text{C}$  | 1.5        | 1.5        | 1.5        | V             |
| Reverse current       | $I_R$  | $V_R = 50\text{ V}$ , $T_j = 25\text{ }^{\circ}\text{C}$  | 10         | 10         | 10         | $\mu\text{A}$ |
|                       |        | $V_R = 50\text{ V}$ , $T_j = 150\text{ }^{\circ}\text{C}$ | 10         | 10         | 10         | mA            |

### Thermal characteristics

|                                   |            |  |      |      |      |                      |
|-----------------------------------|------------|--|------|------|------|----------------------|
| Thermal resistance, junction - ca | $R_{thJC}$ |  | 0.65 | 0.65 | 0.65 | $^{\circ}\text{C/W}$ |
|-----------------------------------|------------|--|------|------|------|----------------------|

Figure .1-Typical Forward Characteristics

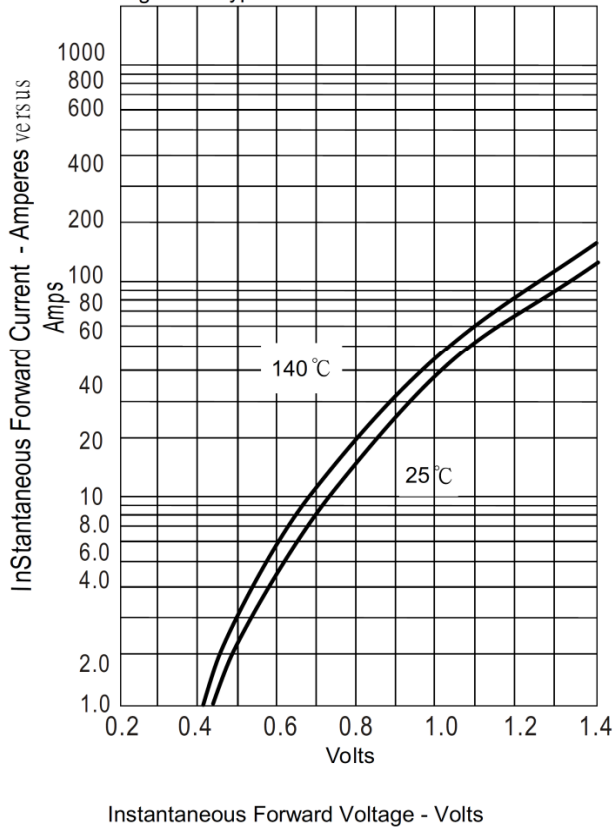


Figure .2-Forward Derating Curve

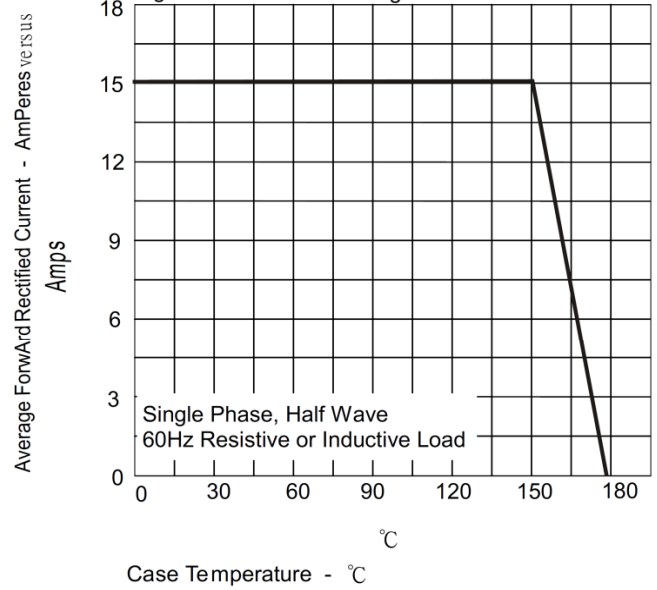


Figure .3- Peak Forward Surge Current



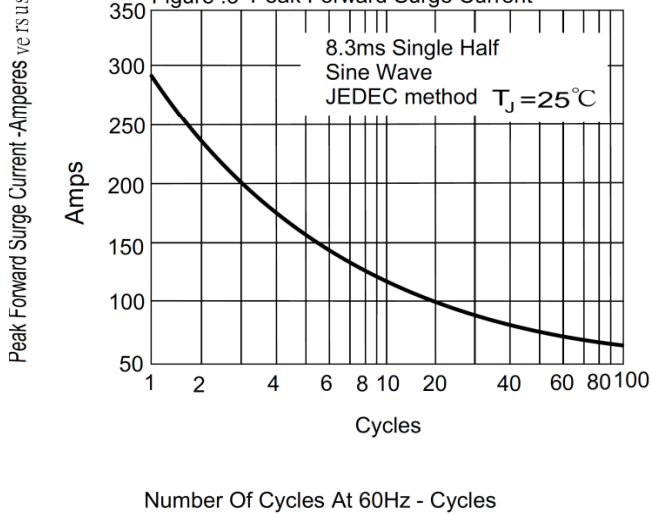


Figure .4-Typical Reverse Characteristics

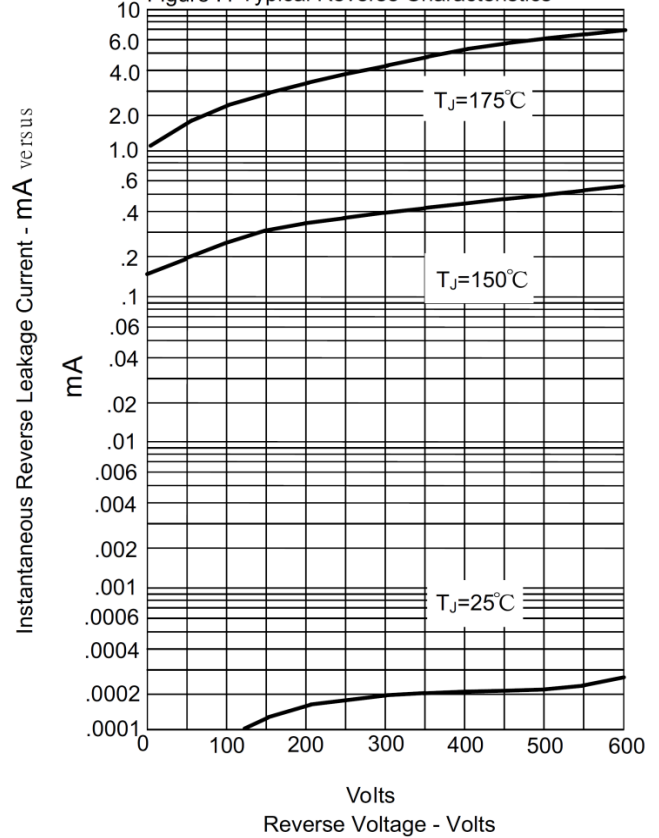

## Package dimensions and terminal configuration

Product is marked with part number and terminal configuration.

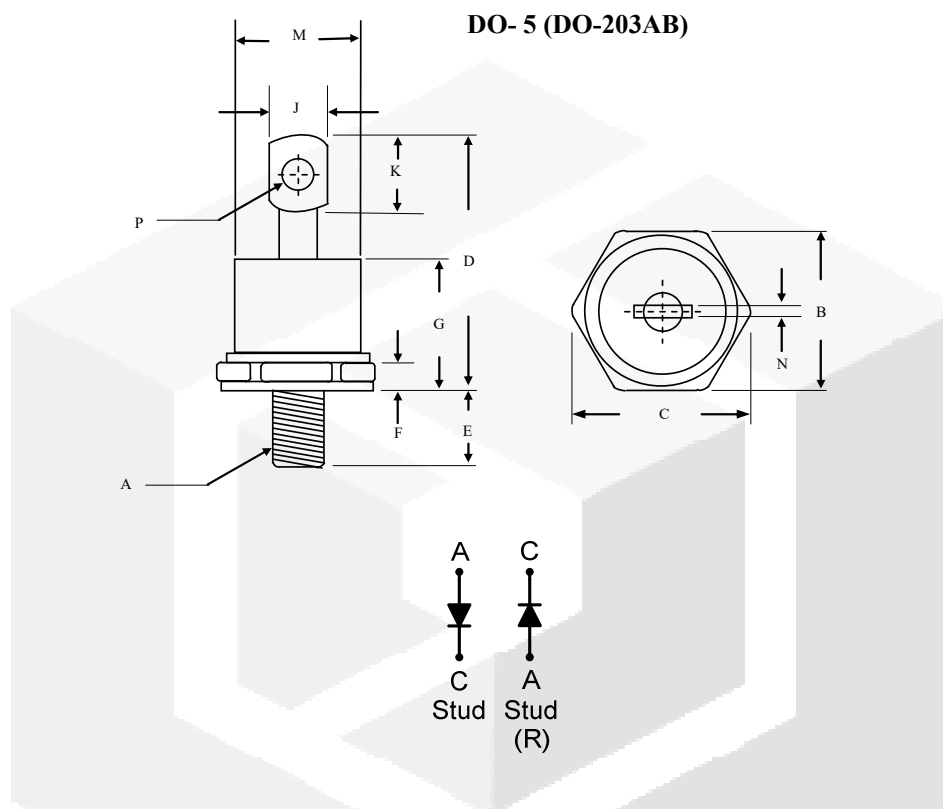

|   | Inches      |       | Millimeters |       |
|---|-------------|-------|-------------|-------|
|   | Min         | Max   | Min         | Max   |
| A | 1/4 -28 UNF |       |             |       |
| B | 0.669       | 0.687 | 17.19       | 17.44 |
| C | ----        | 0.794 | ----        | 20.16 |
| D | ----        | 1.020 | ----        | 25.91 |
| E | 0.422       | 0.453 | 10.72       | 11.50 |
| F | 0.115       | 0.200 | 2.93        | 5.08  |
| G | ----        | 0.460 | ----        | 11.68 |
| J | ----        | 0.280 | ----        | 7.00  |
| K | 0.236       | ----  | 6.00        | ----  |
| M | ----        | 0.589 | ----        | 14.96 |
| N | ----        | 0.063 | ----        | 1.60  |
| P | 0.140       | 0.175 | 3.56        | 4.45  |

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[GeneSiC Semiconductor:](#)

[1N3212](#) [1N3213R](#) [1N3213](#) [1N3214](#) [1N3214R](#) [1N3212R](#)