

Solid-Electrolyte TANTALEX® Capacitors, Resin-Coated, Radial-Lead



FEATURES

- Terminations: Tin/lead (SnPb), 100 % tin (Sn)
- Economy and high performance are combined in these radial-lead, solid-electrolyte TANTALEX® capacitor
- Rugged, reliable capacitors featuring low leakage current and low dissipation factor
- Six miniature case sizes and five lead styles. All case sizes are available in standard tape and reel packaging per EIA-RS-468
- Standard ratings include replacements for Type 196D capacitors
- Lead (Pb)-free capacitors have "L" in body marking


RoHS*
COMPLIANT

APPLICATIONS

- Suitable for a broad range of consumer, commercial and industrial equipment

At + 85 °C: Leakage current shall not exceed 10 times the values listed in the Standard Ratings Tables.

At + 125 °C: Leakage shall not exceed 15 times the values listed in the Standard Ratings Tables.

Life Test: Capacitors shall withstand rated DC voltage applied at + 85 °C for 1000 h with a circuit resistance not greater than 3Ω .

Following the life test:

- DCL shall not exceed 125 % of the initial requirements
- Dissipation Factor shall meet the initial requirement
- Change in capacitance shall not exceed $\pm 10\%$

PERFORMANCE CHARACTERISTICS

Operating Temperature: - 55 °C to + 85 °C
(To + 125 °C with voltage derating)

Capacitance Tolerance: At 120 Hz, + 25 °C, $\pm 20\%$, $\pm 10\%$ standard. $\pm 5\%$ available as special

Dissipation Factor: At 120 Hz, + 25 °C. Dissipation factor, shall not exceed the values listed in the Standard Ratings Tables.

DC Leakage Current (DCL Max.):

At + 25 °C: Leakage current shall not exceed the values listed in the Standard Ratings Tables.

LEAD STYLE CONFIGURATIONS AND DIMENSIONS** (LL = Lead Length)

| "LONG/SHORT" LL 1, 3 and Y | EVEN LL 2, 4 and 5 | "OUTSIDE HOCKEYSTICK" 6 and 7 | "SNAP-IN" 9 | "HAIRPIN" X, Z 6.35 max. |
|---|-----------------------|----------------------------------|----------------|-----------------------------|
| <p>(1) - WIRE DIAMETER (NOMINAL) 0.020" [0.51 mm]</p> | | | | |

AVAILABLE LEAD STYLES AND PACKAGING TYPES PER CASE SIZE

| LEAD STYLE/CASE | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 9 | X | Y | Z |
|--------------------|---|------------|--------------------|------------|-----------------------|---|---|---|---|---|---|
| A | | | | | | | | | | | |
| B | | Bulk V1 | | | | | | | | | |
| C | | | Bulk Reel B1 | | | | | | | | |
| D | | | Ammo A1 | | | | | | | | |
| E | | | | Bulk V1 | | | | | | | |
| F | | | | | Bulk/ Reel Ammo | | | | | | |

* Pb containing terminations are not RoHS compliant, exemptions may apply

DIMENSIONS in inches [millimeters]

| LEAD STYLE | | 1, 2, 3, 4 | | 1, 2, 3 | 2, 4 | 5, Y | | 6 | | |
|------------|-----------------|------------------------|------------------|-----------------|-----------------------|-----------------------|-----------------------|------------------------|------------------|-------------------------------|
| CASE | D max. | P ± 0.024 [0.60] | H max. | L min. | L ± 0.118 [3.0] | P ± 0.03 [0.76] | L ± 0.118 [3.0] | P ± 0.024 [0.60] | H1 max. | L |
| A | 0.173 [4.40] | 0.100 [2.54] | 0.280 [7.11] | 0.591 [15.0] | 0.748 [19.0] | 0.125 [3.18] | 0.748 [19.0] | 0.200 [5.08] | 0.378 [9.61] | 0.240 ± 0.030 [6.1 ± 0.76] |
| B | 0.197 [5.00] | | 0.300 [7.62] | | | | | | 0.398 [10.12] | |
| C | 0.217 [5.50] | | 0.360 [9.14] | | | | | | 0.458 [11.64] | |
| D | 0.236 [6.00] | | 0.400 [10.16] | | | | | | 0.498 [12.66] | |
| E | 0.339 [8.60] | | 0.492 [12.50] | | | | | | 0.591 [15.00] | |
| F | 0.378 [9.60] | | 0.650 [16.50] | | | | | | 0.748 [19.00] | |

DIMENSIONS in inches [millimeters]

| LEAD STYLE | 7, 9 | 7 | | 9 | | X, Z | | | | X | Z | | |
|---------------|-----------------|------------------------|------------------|-----------------------|------------------------|------------------|-----------------------|-----------------|------------------|------------------|------------------|-----------------|------------------|
| CASE | D max. | P ± 0.024 [0.60] | H1 max. | L ± 0.03 [0.76] | P ± 0.024 [0.60] | H1 max. | L ± 0.03 [0.76] | D max. | H max. | H1 max. | L ± 0.125 | P ± 0.024 | P ± 0.024 |
| A | 0.173 [4.40] | 0.25 [6.35] | 0.378 [9.61] | 0.240 [6.10] | 0.200 [5.08] | 0.398 [10.11] | 0.240 [6.10] | 0.173 [4.40] | 0.280 [7.11] | 0.340 [8.64] | 0.750 [19.05] | 0.100 [2.54] | 0.125 [3.175] |
| B | 0.197 [5.00] | | 0.398 [10.12] | | | 0.418 [10.62] | | 0.197 [5.00] | 0.300 [7.62] | 0.360 [9.14] | | | |
| C | 0.217 [5.50] | | 0.458 [11.64] | | | 0.478 [12.14] | | 0.217 [5.50] | 0.360 [9.14] | 0.420 [10.67] | | | |
| D | 0.236 [6.00] | | 0.498 [12.66] | | | 0.518 [13.16] | | 0.236 [6.00] | 0.400 [10.16] | 0.460 [11.68] | | | |

Note:

- Lead space measured within 0.05 [1.27] of the body of the capacitor or from the bottom of the crimp

ORDERING INFORMATION

| 199D | 475 | X9 | 003 | A | 1 (1) | V1 | E3 |
|-------|--|---|--|-----------------------------------|--|---|-------------------|
| MODEL | CAPACITANCE | CAPACITANCE TOLERANCE | DC VOLTAGE RATING AT + 85 °C | CASE CODE | LEAD STYLE | PACKAGING | RoHS COMPLIANT |
| | This is expressed in picofarads. The first two digits are the significant figures. The third is the number of zeros to follow. | X0 = ± 20 % X9 = ± 10 % ** X5 = ± 5 % ** Special Order | This is expressed in V. To complete the three-digit block, zeros precede the voltage rating. A decimal point is indicated by an "R" (6R3 = 6.3 V). | See Ratings and Case Codes table. | V1 = Bulk B1 = Tape and reel A1 = Ammo | E3 = 100 % tin termination (RoHS compliant) Blank = Tin/lead termination | |

Note:

- (1) see lead styles table

**199D OBSOLETE VS. CURRENT ORDERING CROSS REFERENCE**

| OBsolete | New | Description |
|----------|-----|---|
| A1 | 1V1 | 0.100 SP, UNEVEN STRAIGHT LL, BULK CASES A - D |
| A1 | 3V1 | 0.200 SP, UNEVEN STRAIGHT LL, BULK, CASES E, F |
| A1 | 2V1 | 0.100 SP, EVEN STRAIGHT LL, BULK, CASES A - D |
| A6 | 2B1 | 0.100 SP, EVEN STRAIGHT LL, REEL POSITIVE LEADER, CASES A - D |
| A6 | 2A1 | 0.100 SP, EVEN STRAIGHT LL, AMMO, CASES A - D |
| A1 | 4V1 | 0.200 SP, EVEN STRAIGHT LL, BULK, CASES E, F |
| A6 | 4B1 | 0.200 SP, EVEN STRAIGHT LL, REEL POSITIVE LEADER, CASES E, F |
| A6 | 4A1 | 0.200 SP, EVEN STRAIGHT LL, AMMO, CASES E, F |
| A2 | 5V1 | 0.125 SP, EVEN STRAIGHT LL, BULK, CASES A - D |
| A7 | 5B1 | 0.125 SP, EVEN STRAIGHT LL, REEL POSITIVE LEADER, CASES A - D |
| A7 | 5A1 | 0.125 SP, EVEN STRAIGHT LL, AMMO, CASES A - D |
| A2 | YV1 | 0.125 SP, UNEVEN STRAIGHT LL, BULK, CASES A - D |
| B1 | XV1 | 0.100 SP, HAIRPIN LL, BULK CASES A - D |
| B6 | XB1 | 0.100 SP, HAIRPIN LL, REEL POSITIVE LEADER, CASES A - D |
| B6 | XA1 | 0.100 SP, HAIRPIN LL, AMMO, CASES A - D |
| B2 | ZV1 | 0.125 SP, HAIRPIN LL, BULK, CASES A - D |
| B7 | ZB1 | 0.125 SP, HAIRPIN LL, REEL POSITIVE LEADER, CASES A - D |
| B7 | ZA1 | 0.125 SP, HAIRPIN LL, AMMO, CASES A - D |
| E2 | 6V1 | 0.200 SP, HOCKEY STICK LL, BULK, CASES A - F |
| E7 | 6B1 | 0.200 SP, HOCKEY STICK LL, REEL POSITIVE LEADER, CASES A - F |
| E7 | 6A1 | 0.200 SP, HOCKEY STICK LL, AMMO, CASES A - F |
| E3 | 7V1 | 0.250 SP, HOCKEY STICK LL, BULK, CASES A - D |
| E8 | 7B1 | 0.250 SP, HOCKEY STICK LL, REEL POSITIVE LEADER, CASES A - D |
| E8 | 7A1 | 0.250 SP, HOCKEY STICK LL, AMMO, CASES A - D |
| E4 | | OBsolete |
| G2 | 9V1 | 0.200 SP, SNAP-IN LL, BULK, CASES A - D |
| G7 | 9B1 | 0.200 SP, SNAP-IN LL, REEL POSITIVE LEADER, CASES A - D |
| G7 | 9A1 | 0.200 SP, SNAP-IN LL, AMMO, CASES A - D |

STANDARD RATINGS

| CAPACITANCE (μ F) | CASE CODE | PART NUMBER* | MAX. DCL at + 25 °C (μ A) | MAX. DF at + 25 °C 120 Hz (%) |
|---|-----------|----------------------|--------------------------------------|-------------------------------------|
| 3 WVDC AT + 85 °C, SURGE = 3.6 V . . . 2 WVDC AT + 125 °C, SURGE = 2.4 V | | | | |
| 4.7 | A | 199D475(1)003A(2)(3) | 0.5 | 6 |
| 6.8 | A | 199D685(1)003A(2)(3) | 0.5 | 6 |
| 10.0 | A | 199D106(1)003A(2)(3) | 0.5 | 8 |
| 15.0 | A | 199D156(1)003A(2)(3) | 0.5 | 8 |
| 22.0 | B | 199D226(1)003B(2)(3) | 0.6 | 8 |
| 33.0 | B | 199D336(1)003B(2)(3) | 1.0 | 8 |
| 47.0 | C | 199D476(1)003C(2)(3) | 1.4 | 8 |
| 68.0 | C | 199D686(1)003C(2)(3) | 2.0 | 8 |
| 100.0 | D | 199D107(1)003D(2)(3) | 3.0 | 10 |
| 150.0 | D | 199D157(1)003D(2)(3) | 4.0 | 10 |
| 220.0 | E | 199D227(1)003E(2)(3) | 5.0 | 10 |
| 330.0 | E | 199D337(1)003E(2)(3) | 6.0 | 10 |
| 470.0 | F | 199D477(1)003F(2)(3) | 8.0 | 10 |
| 680.0 | F | 199D687(1)003F(2)(3) | 10.0 | 10 |
| 6.3 WVDC AT + 85 °C, SURGE = 8 V . . . 4 WVDC AT + 125 °C, SURGE = 5 V | | | | |
| 4.7 | A | 199D475(1)6R3A(2)(3) | 0.5 | 6 |
| 6.8 | A | 199D685(1)6R3A(2)(3) | 0.5 | 6 |
| 10.0 | B | 199D106(1)6R3B(2)(3) | 0.6 | 8 |
| 15.0 | B | 199D156(1)6R3B(2)(3) | 0.9 | 8 |
| 22.0 | C | 199D226(1)6R3C(2)(3) | 1.3 | 8 |
| 33.0 | C | 199D336(1)6R3C(2)(3) | 2.0 | 8 |
| 47.0 | D | 199D476(1)6R3D(2)(3) | 2.9 | 8 |
| 68.0 | D | 199D686(1)6R3D(2)(3) | 4.0 | 8 |
| 100.0 | D | 199D107(1)6R3D(2)(3) | 5.0 | 10 |
| 150.0 | E | 199D157(1)6R3E(2)(3) | 6.0 | 10 |
| 220.0 | E | 199D227(1)6R3E(2)(3) | 7.0 | 10 |
| 330.0 | F | 199D337(1)6R3F(2)(3) | 8.0 | 10 |
| 10 WVDC AT + 85 °C, SURGE = 13 V . . . 7 WVDC AT + 125 °C, SURGE = 9 V | | | | |
| 3.3 | A | 199D335(1)010A(2)(3) | 0.5 | 6 |
| 4.7 | A | 199D475(1)010A(2)(3) | 0.5 | 6 |
| 6.8 | B | 199D685(1)010B(2)(3) | 0.6 | 6 |
| 10.0 | B | 199D106(1)010B(2)(3) | 1.0 | 8 |
| 15.0 | C | 199D156(1)010C(2)(3) | 1.5 | 8 |
| 22.0 | C | 199D226(1)010C(2)(3) | 2.0 | 8 |
| 33.0 | D | 199D336(1)010D(2)(3) | 3.0 | 8 |
| 39.0 | D | 199D339(1)010D(2)(3) | 3.9 | 8 |
| 47.0 | D | 199D476(1)010D(2)(3) | 4.0 | 8 |
| 68.0 | D | 199D686(1)010D(2)(3) | 5.0 | 8 |
| 100.0 | E | 199D107(1)010E(2)(3) | 6.0 | 10 |
| 150.0 | E | 199D157(1)010E(2)(3) | 7.0 | 10 |
| 220.0 | F | 199D227(1)010F(2)(3) | 8.0 | 10 |
| 16 WVDC AT + 85 °C, SURGE = 20 V . . . 10 WVDC AT + 125 °C, SURGE = 12 V | | | | |
| 2.2 | A | 199D225(1)016A(2)(3) | 0.5 | 6 |
| 3.3 | A | 199D335(1)016A(2)(3) | 0.5 | 6 |
| 4.7 | B | 199D475(1)016B(2)(3) | 0.7 | 6 |
| 6.8 | B | 199D685(1)016B(2)(3) | 1.0 | 6 |
| 10.0 | C | 199D106(1)016C(2)(3) | 1.5 | 8 |
| 15.0 | C | 199D156(1)016C(2)(3) | 2.4 | 8 |
| 22.0 | D | 199D226(1)016D(2)(3) | 3.5 | 8 |
| 33.0 | D | 199D336(1)016D(2)(3) | 4.0 | 8 |
| 47.0 | E | 199D476(1)016E(2)(3) | 5.0 | 8 |
| 68.0 | E | 199D686(1)016E(2)(3) | 6.0 | 8 |
| 100.0 | F | 199D107(1)016F(2)(3) | 7.0 | 10 |
| 150.0 | F | 199D157(1)016F(2)(3) | 8.0 | 10 |

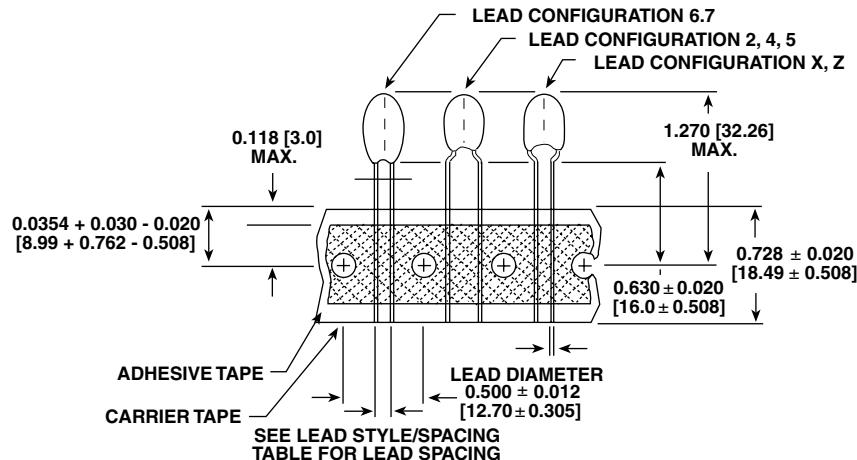
Notes:

- * (1) For capacitance tolerance: ($X_0 = \pm 20\%$), ($X_9 = \pm 10\%$) or ($X_5 = 5\%$)
- (2) To specify Lead Style/Spacing/Packaging insert the last three characters in the Part Number. Use the appropriate code shown in the Current Ordering Cross Reference table and explained in the Ordering Information and Lead Styles table.
- (3) E3 = RoHS compliant 100 % tin leads. Blank or no suffix = standard tin/lead termination.

| STANDARD RATINGS | | | | |
|---|------------------|----------------------|--|--|
| CAPACITANCE (μF) | CASE CODE | PART NUMBER* | MAX. DCL at + 25 °C (μA) | MAX. DF at + 25 °C 120 Hz (%) |
| 20 WVDC AT + 85 °C, SURGE = 26 V . . . 13 WVDC AT + 125 °C, SURGE = 16 V | | | | |
| 3.3 | B | 199D335(1)020B(2)(3) | 0.8 | 6 |
| 4.7 | B | 199D475(1)020B(2)(3) | 1.0 | 6 |
| 6.8 | C | 199D685(1)020C(2)(3) | 1.5 | 6 |
| 10.0 | C | 199D106(1)020C(2)(3) | 2.0 | 8 |
| 15.0 | D | 199D156(1)020D(2)(3) | 2.5 | 8 |
| 22.0 | D | 199D226(1)020D(2)(3) | 3.0 | 8 |
| 33.0 | E | 199D336(1)020E(2)(3) | 4.0 | 8 |
| 47.0 | E | 199D476(1)020E(2)(3) | 5.0 | 8 |
| 68.0 | F | 199D686(1)020F(2)(3) | 6.0 | 8 |
| 100.0 | F | 199D107(1)020F(2)(3) | 7.0 | 10 |
| 25 WVDC AT + 85 °C, SURGE = 33 V . . . 17 WVDC AT + 125 °C, SURGE = 21 V | | | | |
| 1.0 | A | 199D105(1)025A(2)(3) | 0.5 | 4 |
| 1.5 | A | 199D155(1)025A(2)(3) | 0.5 | 6 |
| 2.2 | A | 199D225(1)025A(2)(3) | 0.5 | 6 |
| 3.3 | B | 199D335(1)025B(2)(3) | 0.8 | 6 |
| 4.7 | B | 199D475(1)025B(2)(3) | 1.0 | 6 |
| 6.8 | C | 199D685(1)025C(2)(3) | 1.5 | 6 |
| 10.0 | C | 199D106(1)025C(2)(3) | 2.5 | 8 |
| 15.0 | D | 199D156(1)025D(2)(3) | 3.0 | 8 |
| 22.0 | D | 199D226(1)025D(2)(3) | 4.0 | 8 |
| 33.0 | E | 199D336(1)025E(2)(3) | 5.0 | 8 |
| 47.0 | E | 199D476(1)025E(2)(3) | 6.0 | 8 |
| 68.0 | F | 199D686(1)025F(2)(3) | 7.0 | 8 |
| 35 WVDC AT + 85 °C, SURGE = 46 V . . . 23 WVDC AT + 125 °C, SURGE = 28 V | | | | |
| 0.1 | A | 199D104(1)035A(2)(3) | 0.5 | 4 |
| 0.15 | A | 199D154(1)035A(2)(3) | 0.5 | 4 |
| 0.22 | A | 199D224(1)035A(2)(3) | 0.5 | 4 |
| 0.33 | A | 199D334(1)035A(2)(3) | 0.5 | 4 |
| 0.47 | A | 199D474(1)035A(2)(3) | 0.5 | 4 |
| 0.68 | A | 199D684(1)035A(2)(3) | 0.5 | 4 |
| 1.0 | A | 199D105(1)035A(2)(3) | 0.5 | 4 |
| 1.5 | A | 199D155(1)035A(2)(3) | 0.5 | 6 |
| 1.8 | B | 199D185(1)035B(2)(3) | 0.7 | 6 |
| 2.2 | B | 199D225(1)035B(2)(3) | 0.7 | 6 |
| 3.3 | B | 199D335(1)035B(2)(3) | 1.0 | 6 |
| 4.7 | C | 199D475(1)035C(2)(3) | 1.5 | 6 |
| 6.8 | D | 199D685(1)035D(2)(3) | 2.3 | 6 |
| 10.0 | D | 199D106(1)035D(2)(3) | 3.5 | 8 |
| 15.0 | E | 199D156(1)035E(2)(3) | 4.0 | 8 |
| 22.0 | E | 199D226(1)035E(2)(3) | 5.0 | 8 |
| 33.0 | F | 199D336(1)035F(2)(3) | 6.0 | 8 |
| 47.0 | F | 199D476(1)035F(2)(3) | 7.0 | 8 |
| 50 WVDC AT + 85 °C, SURGE = 65 V . . . 33 WVDC AT + 125 °C, SURGE = 40 V | | | | |
| 0.1 | A | 199D104(1)050A(2)(3) | 0.5 | 4 |
| 0.15 | A | 199D154(1)050A(2)(3) | 0.5 | 4 |
| 0.22 | A | 199D224(1)050A(2)(3) | 0.5 | 4 |
| 0.33 | A | 199D334(1)050A(2)(3) | 0.5 | 4 |
| 0.47 | A | 199D474(1)050A(2)(3) | 0.5 | 4 |
| 0.68 | A | 199D684(1)050A(2)(3) | 0.5 | 4 |
| 1.0 | B | 199D105(1)050B(2)(3) | 0.5 | 4 |
| 1.5 | C | 199D155(1)050C(2)(3) | 0.7 | 6 |
| 2.2 | C | 199D225(1)050C(2)(3) | 1.1 | 6 |
| 3.3 | D | 199D335(1)050D(2)(3) | 1.5 | 6 |
| 4.7 | D | 199D475(1)050D(2)(3) | 2.0 | 6 |
| 6.8 | F | 199D685(1)050F(2)(3) | 3.0 | 6 |
| 10.0 | F | 199D106(1)050F(2)(3) | 4.0 | 8 |
| 15.0 | F | 199D156(1)050F(2)(3) | 5.0 | 8 |
| 22.0 | F | 199D226(1)050F(2)(3) | 6.0 | 8 |

Notes:

- * (1) For capacitance tolerance: ($X_0 = \pm 20\%$), ($X_9 = \pm 10\%$) or ($X_5 = 5\%$)
- (2) To specify Lead Style/Spacing/Packaging insert the last three characters in the Part Number. Use the appropriate code shown in the Current Ordering Cross Reference table and explained in the Ordering Information and Lead Styles table.
- (3) E3 = RoHS compliant 100 % tin leads. Blank or no suffix = standard tin/lead termination.

STANDARD REEL PACKAGING SPECIFICATIONS PER EIA RS-468 in inches [millimeters]

| CASE CODE | OBsolete | LEAD STYLE | LEAD SPACING | LL MIN. (BULK) |
|---------------------|----------|------------------------------|---|----------------|
| A, B, C, D | A1, A6 | 1V1 (Bulk), 2B1 (T and R) | 0.100 + 0.024 - 0.016 [2.54 + 0.60 - 0.40] | 0.187 [4.7] |
| A, B, C, D | B1, B6 | XV1 (Bulk), XB1 (T and R) | 0.100 + 0.024 - 0.016 [2.54 + 0.60 - 0.40] | 0.187 [4.7] |
| A, B, C, D, E, F | E2, E7 | 6V1 (Bulk), 6B1 (T and R) | 0.200 + 0.024 - 0.016 [5.08 + 0.06 - 0.40] | 0.187 [4.7] |

Note:

- Lead space measured within 0.05 [1.27] of the body of the capacitor, or from the bottom of the crimp. Lead Style 'A' may be supplied with 0.59 [15] anode lead and 0.47 [12] cathode lead.

Tape and Reel Packaging: Type 199D radial-leaded tantalum capacitors, all lead styles except 1, 3 and Y are available taped and reeled per EIA-468.

| CASE CODE | A | B | C | D | E | F |
|---------------------------|------|---|------|---|------|---|
| Quantity per box bulk | 1000 | | 500 | | 100 | |
| Quantity per box ammopack | 2500 | | 2000 | | 1500 | |
| Quantity per reel | 1000 | | | | 500 | |



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.