


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD		
DF	SO	E	REV PER ECO-12-013186	18JUL12	PY	DE	

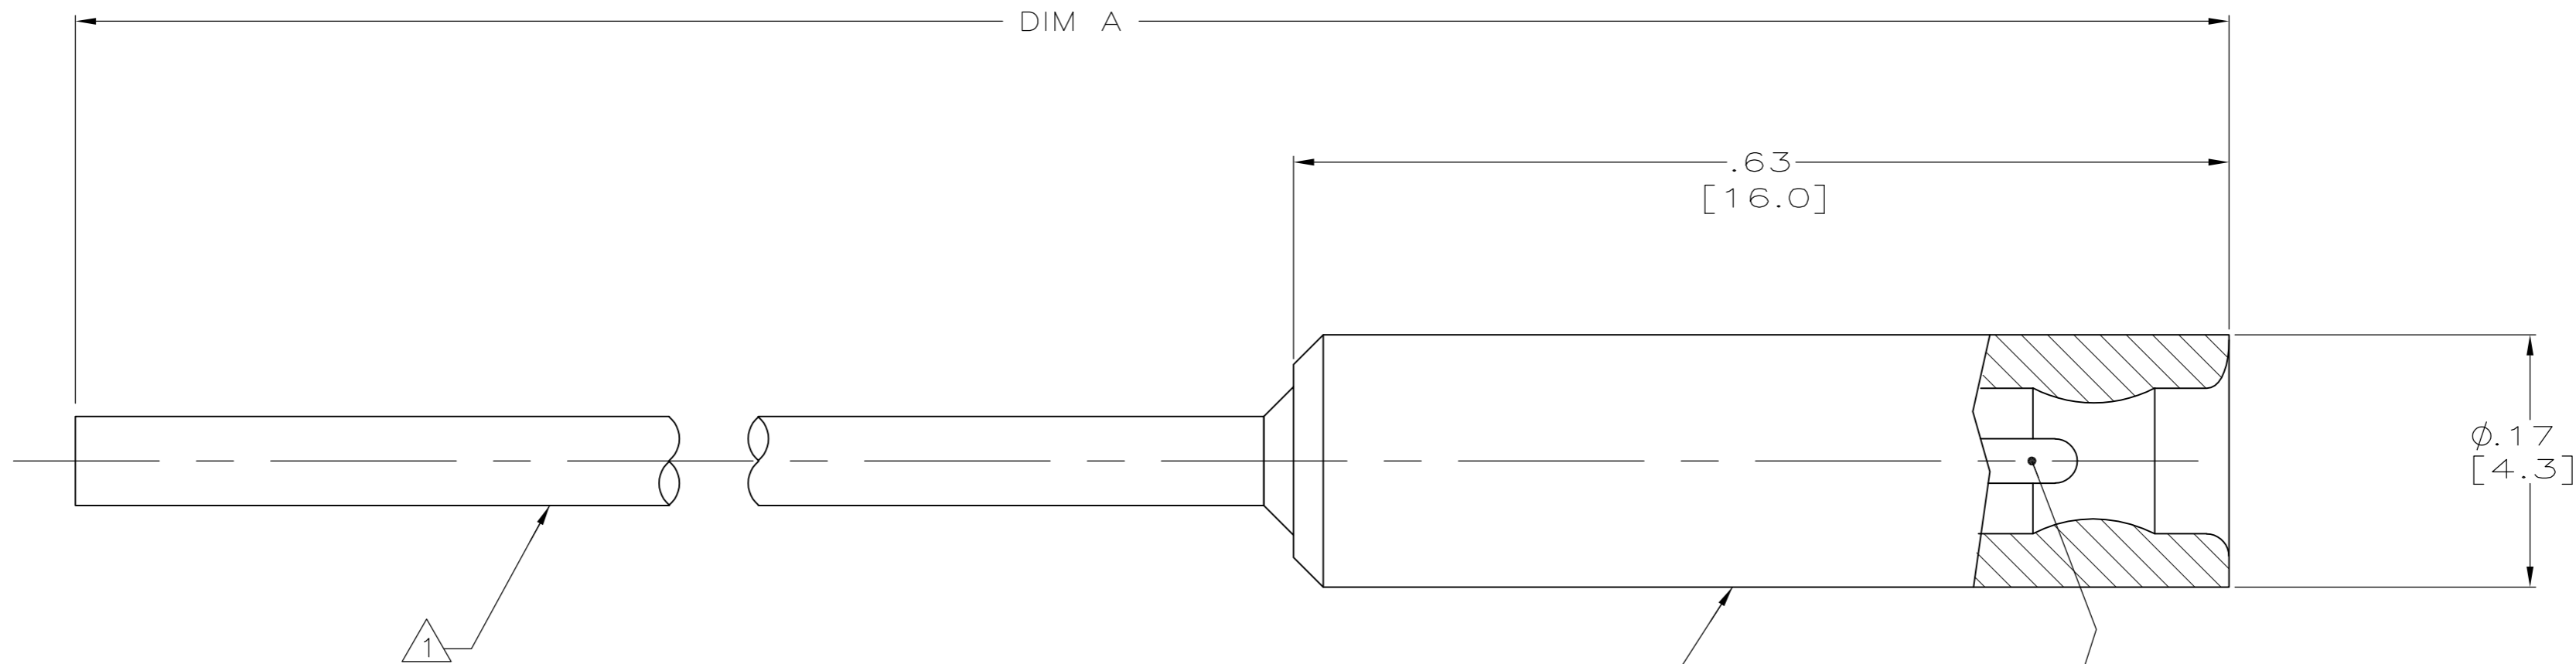

SILICONE RUBBER PER ZZ-R-765

SIZE 22 PIN CONTACT  
 MAT'L: BRONZE PER ASTM-B-140  
 FINISH: GOLD OVER NICKEL

OBSOLETE	4	15.00±12 [381.0±3.0]	#24 GA SILICONE COATED FEP .060 O.D. COLOR: RED	1218148-5
	3	12.50±12 [317.5±3.0]	#24 GA SILICONE COATED FEP .060 O.D. COLOR: RED	1218148-4
	-	72.00±72 [1828.8±18.3]	#24 GA SILICONE COATED FEP .060 O.D. COLOR: RED	1218148-3
	-	48.00±48 [1219.2±12.2]	#24 GA SILICONE COATED FEP .060 O.D. COLOR: RED	1218148-2
	-	12.50±12 [317.5±3.0]	#24 GA SILICONE COATED FEP .060 O.D. COLOR: RED	1218148-1
REMARKS		DIM A	WIRE DESCRIPTION 1	PART NUMBER

- OPERATING VOLTAGE: 6 KVDC  
 TEMPERATURE RANGE: -55° C TO +125° C  
 ALTITUDE: SEA LEVEL TO 70,000 FEET
- THIS RECEPTACLE WILL MATE WITH AMP PART NO. 1218147.
- 100% TESTING FOR DWV AND PARTIAL DISCHARGE PER RAYTHEON SPEC. G718649, GROUP A.
- 100% TESTING FOR DWV AND PARTIAL DISCHARGE PER RAYTHEON SPEC. G719581, GROUP A.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN	C.C.THOMAS	2-11-98	 TE Connectivity	
CHK	D.EABY	2-11-98		
APVD	D.EABY	2-11-98		
PRODUCT SPEC				
APPLICATION SPEC			NAME	RECEPTACLE, MICRO-MIN, LGH
WEIGHT	-		SIZE	A2
CUSTOMER DRAWING			CAGE CODE	00779
			DRAWING NO	1218148
			RESTRICTED TO	-
			SCALE	10:1
			SHEET	1 of 1
			REV	E

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1218148-2](#)