THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

LXB 15.00/90

new

with test point

flange version

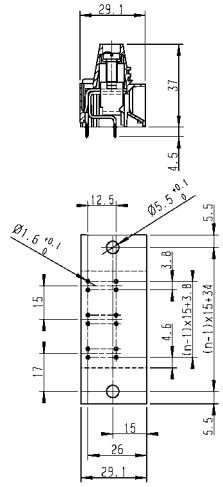

Technical data	VDE	UL	CSA
Rated voltage (V)	800*	600	600
Rated current (A)	101	85	85
Wire size (mm²/AWG)	25.0	16…4	4

*Pollution severity 3 / Overvoltage category III

Additional technical data see page 64

Solder pin length **4.5 mm**
4 solder pins per pole
Color

Poles	Type	Part No.	Qty.
2	LXB 15.00/2/90	**1783710000**	20
3	LXB 15.00/3/90	**1783720000**	20
4	LXB 15.00/4/90	**1783730000**	20
5	LXB 15.00/5/90	**on request**	20
6	LXB 15.00/6/90	**1783740000**	10
7	LXB 15.00/7/90	**on request**	10
8	LXB 15.00/8/90	**1783750000**	10

An M5 bolt is recommended for the mounting flanges.
The bolt is not included in delivery.

Accessories	Page
Marking	40
Mounting	-
Miscellaneous	45

LXBL 15.00/90

new

with test point

flange version

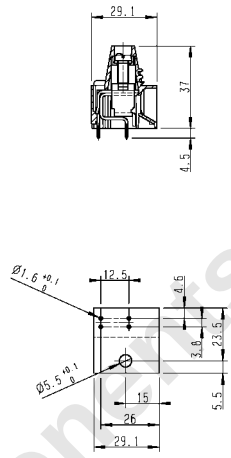

Technical data	VDE	UL	CSA
Rated voltage (V)	800*	600	600
Rated current (A)	101	85	85
Wire size (mm²/AWG)	25.0	16…4	4

*Pollution severity 3 / Overvoltage category III

Additional technical data see page 64

Solder pin length **4.5 mm**
4 solder pins per pole
Color

Poles	Type	Part No.	Qty.
1	LXBL 15.00/1/90	**1783700000**	20

An M5 bolt is recommended for the mounting flanges.
The bolt is not included in delivery.

Accessories	Page
Marking	40
Mounting	-
Miscellaneous	45

LP 15.00/90

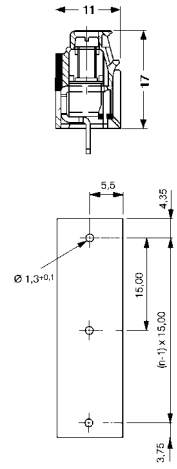

Technical data	VDE	UL	CSA
Rated voltage (V)	1000*	600	600
Rated current (A)	27	15	20
Wire size (mm²/AWG)	4.0	26…12	12

*Pollution severity 3 / Overvoltage category III

Additional technical data see page 60

Solder pin length **4.5 mm**
Color

Poles	Type	Part No.	Qty.
2	LP 15.00/2/90	**1697550000**	100
3	LP 15.00/3/90	**1697560000**	50
4	LP 15.00/4/90	**1697570000**	50
5	LP 15.00/5/90	**995479**	
6	LP 15.00/6/90	**995480**	
7	LP 15.00/7/90	**995481**	
8	LP 15.00/8/90	**995482**	

Accessories	Page
Marking	40
Mounting	46
Miscellaneous	45

onlinecomponents.com