

## Silicon Standard Recovery Diode

$V_{RRM} = 1000\text{ V} - 1400\text{ V}$

$I_F = 100\text{ A}$


### Features

- High Surge Capability
- Types from 1000 V to 1400 V  $V_{RRM}$
- Not ESD Sensitive

### Note:

1. Standard polarity: Stud is cathode.
2. Reverse polarity (R): Stud is anode.
3. Stud is base.

DO-8 Package



Maximum ratings, at  $T_J = 25\text{ }^{\circ}\text{C}$ , unless otherwise specified ("R" devices have leads reversed)

| Parameter                                            | Symbol     | Conditions                                                 | 1N3295A(R) | 1N3296A(R) | 1N3297A(R) | Unit                   |
|------------------------------------------------------|------------|------------------------------------------------------------|------------|------------|------------|------------------------|
| Repetitive peak reverse voltage                      | $V_{RRM}$  |                                                            | 1000       | 1200       | 1400       | V                      |
| DC blocking voltage                                  | $V_{DC}$   |                                                            | 1000       | 1200       | 1400       | V                      |
| Continuous forward current                           | $I_F$      | $T_C \leq 130\text{ }^{\circ}\text{C}$                     | 100        | 100        | 100        | A                      |
| Surge non-repetitive forward current, Half Sine Wave | $I_{F,SM}$ | $T_C = 25\text{ }^{\circ}\text{C}$ , $t_p = 8.3\text{ ms}$ | 2300       | 2300       | 2300       | A                      |
| $I_2t$ for fusing                                    | $I_2t$     | 60 Hz Half wave                                            | 22000      | 22000      | 22000      | $\text{A}^2\text{sec}$ |
| Operating temperature                                | $T_J$      |                                                            | -55 to 150 | -55 to 150 | -55 to 150 | $^{\circ}\text{C}$     |
| Storage temperature                                  | $T_{stg}$  |                                                            | -55 to 150 | -55 to 150 | -55 to 150 | $^{\circ}\text{C}$     |

Electrical characteristics, at  $T_J = 25\text{ }^{\circ}\text{C}$ , unless otherwise specified

| Parameter             | Symbol | Conditions                                                 | 1N3295A(R) | 1N3296A(R) | 1N3297A(R) | Unit |
|-----------------------|--------|------------------------------------------------------------|------------|------------|------------|------|
| Diode forward voltage | $V_F$  | $I_F = 100\text{ A}$ , $T_J = 130\text{ }^{\circ}\text{C}$ | 1.5        | 1.5        | 1.5        | V    |
| Reverse current       | $I_R$  | $V_R = V_{RRM}$ , $T_J = 130\text{ }^{\circ}\text{C}$      | 11         | 9          | 7          | mA   |

### Thermal characteristics

|                                     |            |  |      |      |      |                      |
|-------------------------------------|------------|--|------|------|------|----------------------|
| Thermal resistance, junction - case | $R_{thJC}$ |  | 0.40 | 0.40 | 0.40 | $^{\circ}\text{C/W}$ |
|-------------------------------------|------------|--|------|------|------|----------------------|

**Electrical Characteristics**

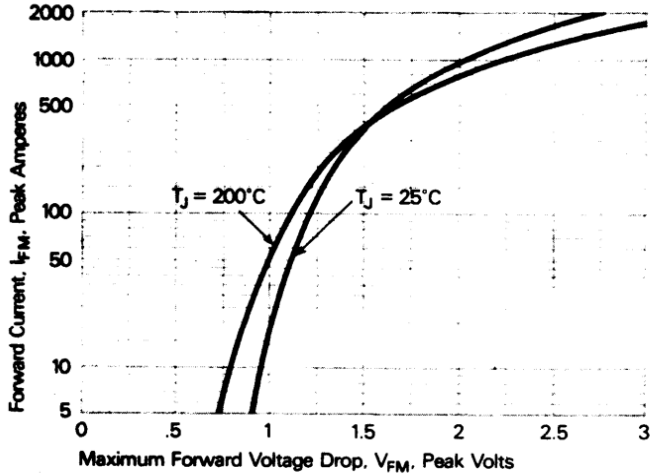


Figure 1. Forward Current vs. Forward Voltage.

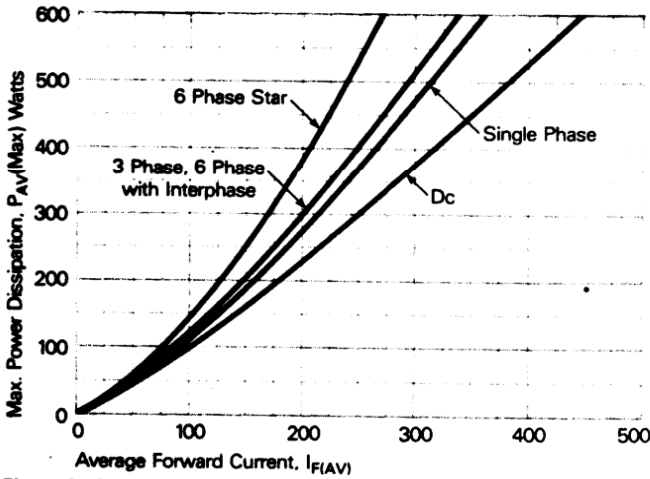


Figure 3. Power dissipation vs. Average forward current.

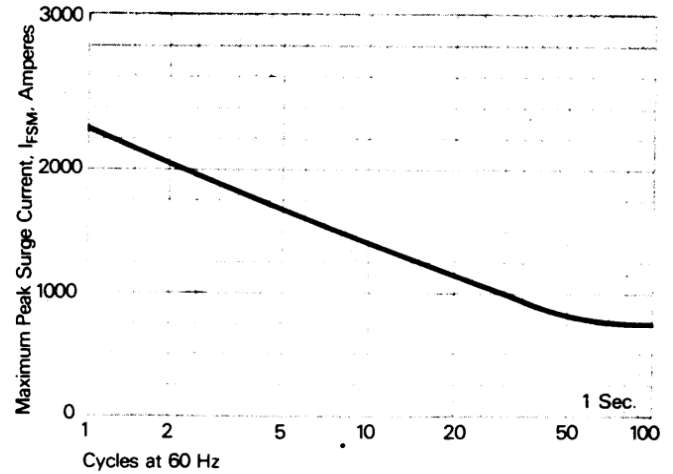


Figure 2. Maximum allowable surge current at rated load conditions.


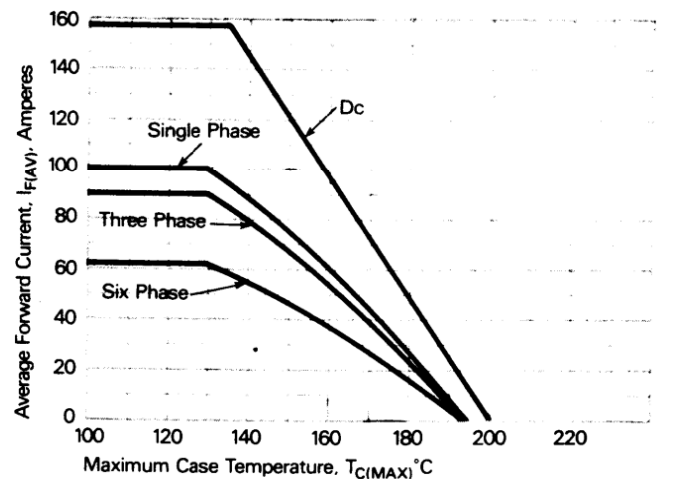


Figure 4. Forward Current vs. Case Temperature.

## Package dimensions and terminal configuration

Product is marked with part number and terminal configuration.

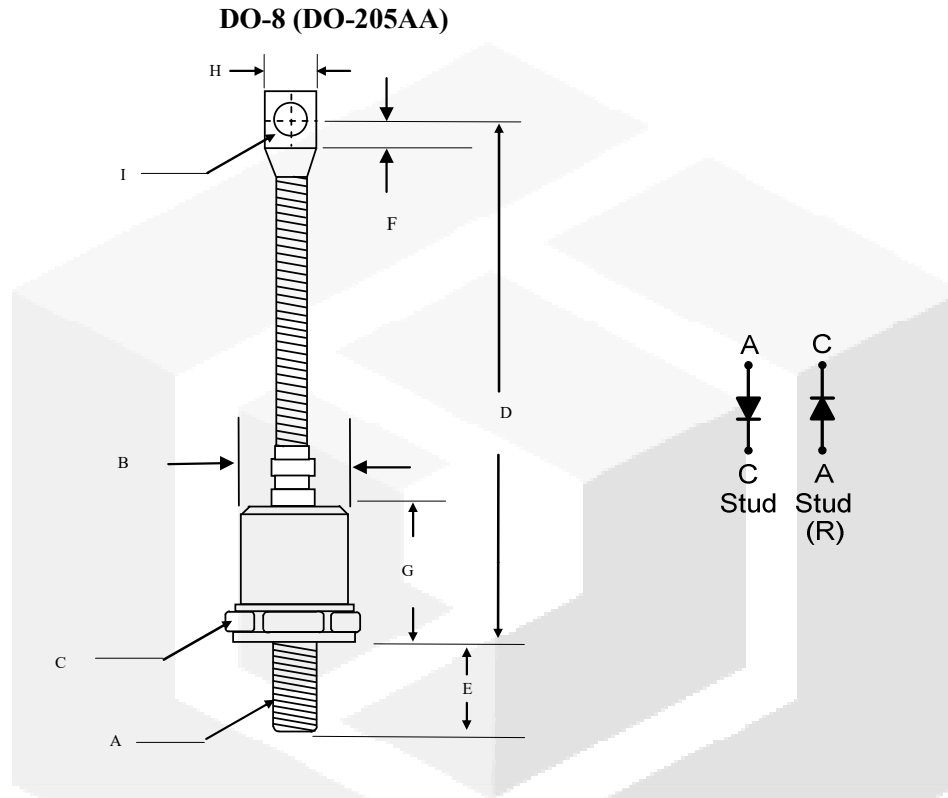

|   | Inches     |              | Millimeters |             |
|---|------------|--------------|-------------|-------------|
|   | Min        | Max          | Min         | Max         |
| A | 3/8-24 UNF |              |             |             |
| B | ----       | $\phi 0.930$ | ----        | $\phi 23.5$ |
| C | 1.050      | 1.060        | 26.67       | 26.92       |
| D | 4.300      | 4.700        | 109.22      | 119.38      |
| E | ----       | 0.690        | ----        | 17.00       |
| F | 0.260      | ----         | 6.50        | ----        |
| G | ----       | 0.940        | ----        | 24.00       |
| H | ----       | 0.600        | ----        | 15.23       |
| I | 0.276      | 0.286        | 7.010       | 7.260       |

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[GeneSiC Semiconductor:](#)

[1N3295A](#) [1N3295AR](#) [1N3296A](#) [1N3296AR](#) [1N3297A](#) [1N3297AR](#)