




LP 5.08/180

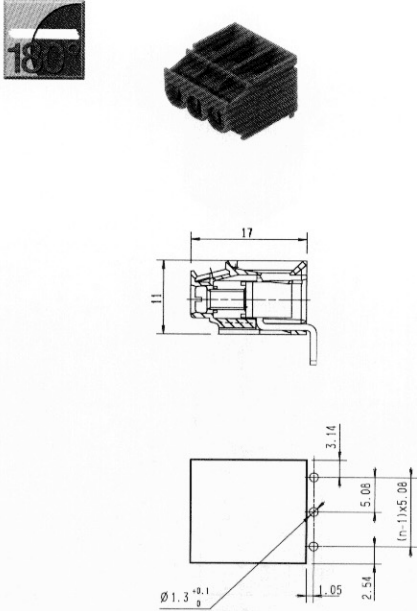

LP1N 5.08/90

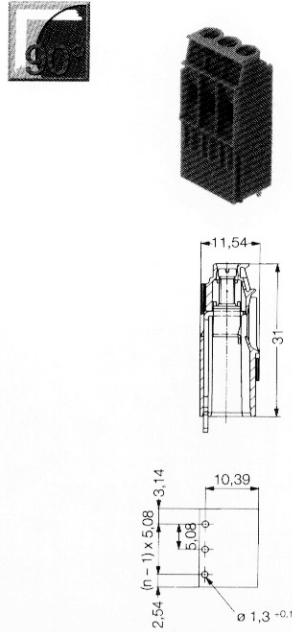

LP1H 5.08/90

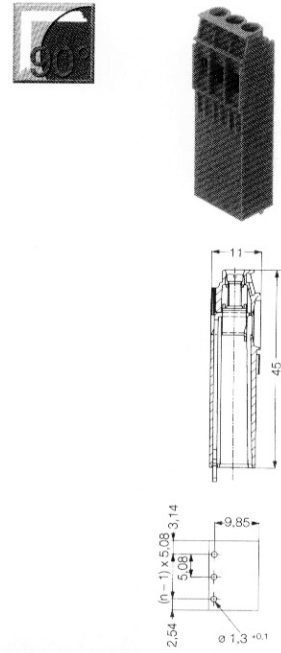

Technical data	VDE	UL	CSA
Rated voltage (V)	250*	300	300
Rated current (A)	25	15	20
Wire size (mm ² /AWG)	4.0	26...12	26...12

*Pollution severity 3 / Overvoltage category III

Additional technical data see page 58

Technical data	VDE	UL	CSA
Rated voltage (V)	250*	300	300
Rated current (A)	24	15	20
Wire size (mm ² /AWG)	4.0	26...12	26...12

*Pollution severity 3 / Overvoltage category III

Additional technical data see page 58

Technical data	VDE	UL	CSA
Rated voltage (V)	250*	300	300
Rated current (A)	24	15	20
Wire size (mm ² /AWG)	4.0	26...12	26...12

*Pollution severity 3 / Overvoltage category III

Additional technical data see page 58

Solder pin length		4.5 mm	4.5 mm		
Color					
Poles	Type	Part No.	Part No.	Qty.	
2	LP 5.08/2/180	1753850000	1753830000	100	
3	LP 5.08/3/180	1753860000	1753840000	100	

Solder pin length		4.5 mm	4.5 mm		
Color					
Poles	Type	Part No.	Part No.	Qty.	
2	LP1N 5.08/2/90	1640850000	1698030000	100	
3	LP1N 5.08/3/90	1640860000	1698040000	100	

Solder pin length		4.5 mm	4.5 mm		
Color					
Poles	Type	Part No.	Part No.	Qty.	
2	LP1H 5.08/2/90	1640930000	1698070000	100	
3	LP1H 5.08/3/90	1640940000	1698080000	50	

Attention: Customers are advised to ensure support for LP1N on the printed circuit board.

Attention: Customers are advised to ensure support for LP1H on the printed circuit board.

Accessories	Page
Marking	40
Mounting	46
Miscellaneous	45-46

Accessories	Page
Marking	40
Mounting	-
Miscellaneous	43, 45, 46

Accessories	Page
Marking	40
Mounting	-
Miscellaneous	43, 45