

HONEYWELL
PART NUMBER
1SX90-T
PRODUCT CODE
VDA6685

REV	DOCUMENT	CHANGED BY	CHECK
6	0038446	KVB 20MAY08	BLR

B


B

A

A

A

A

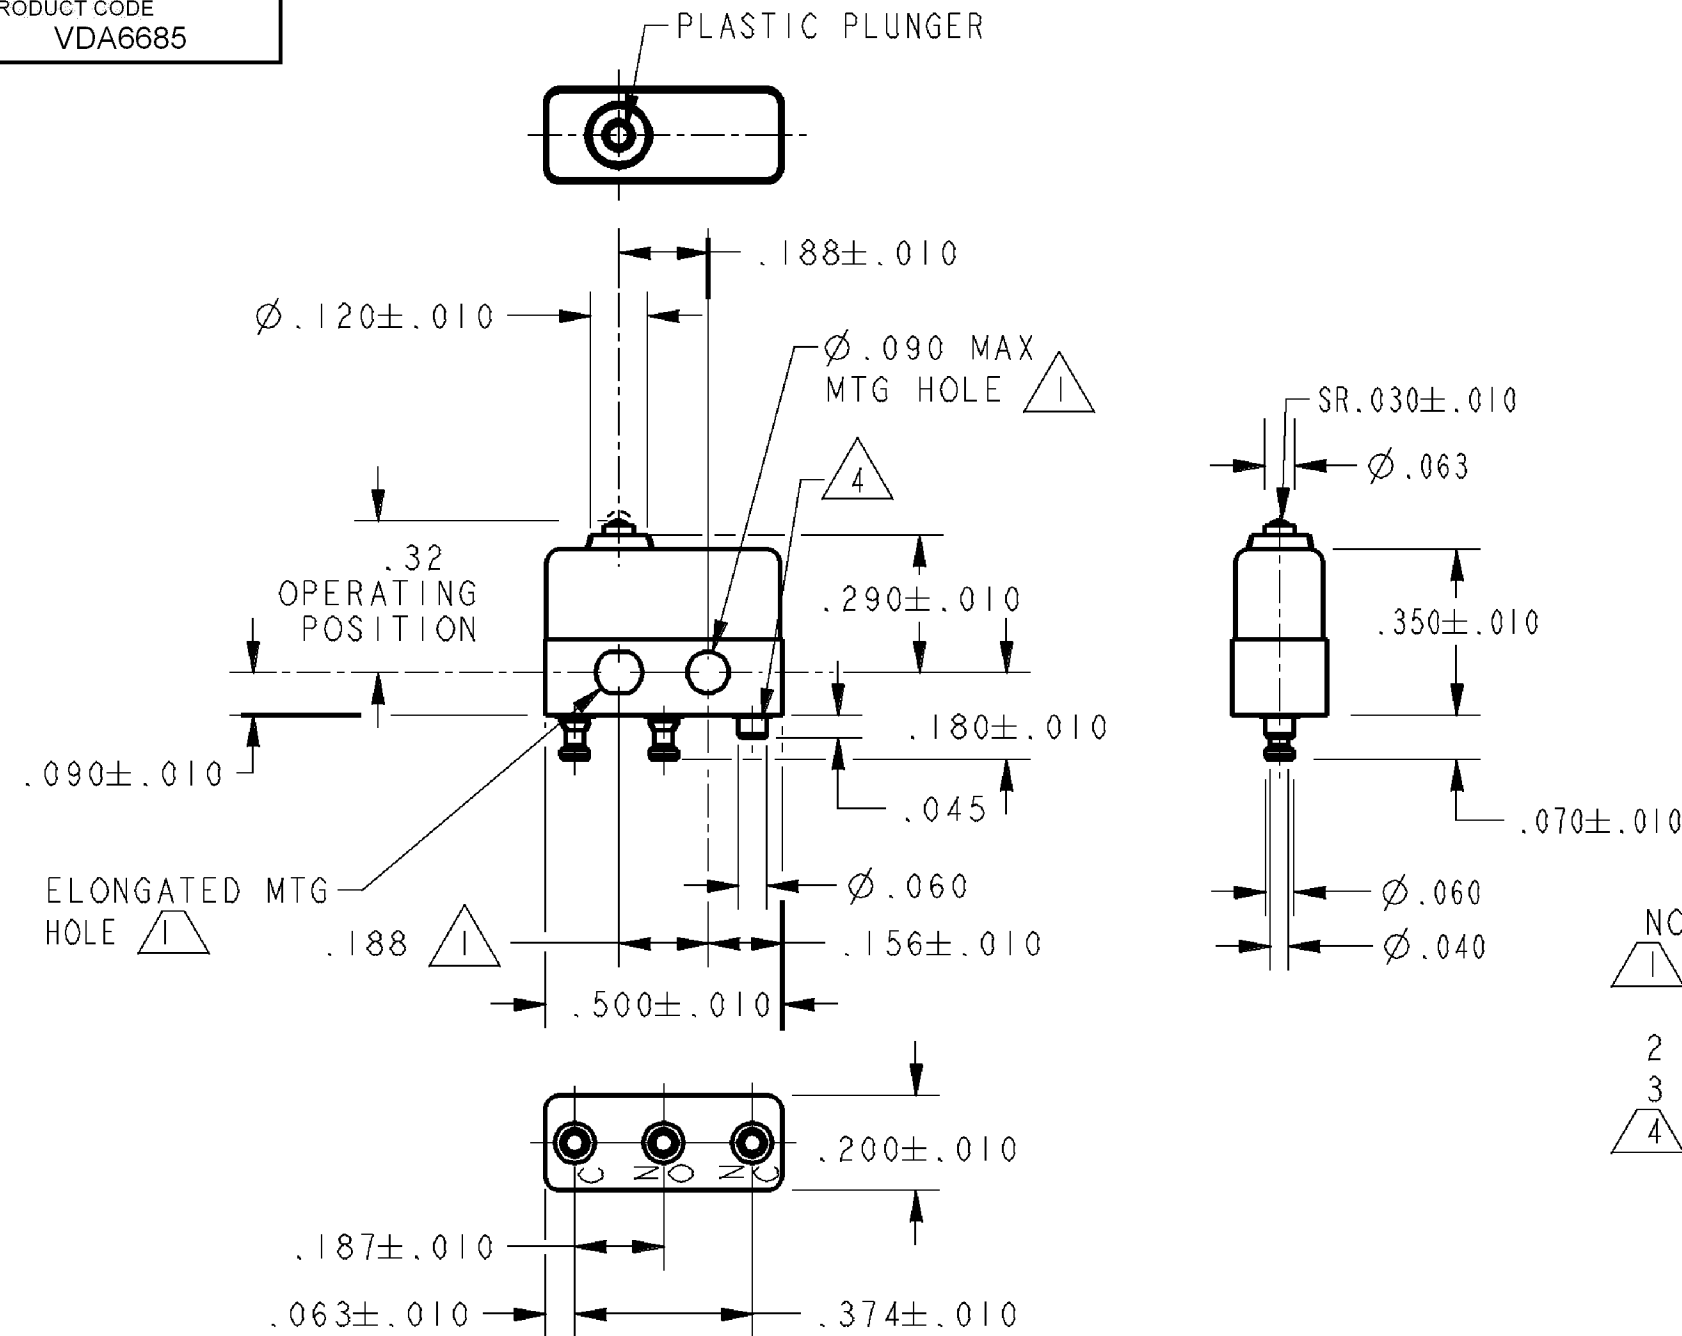

- NOTES
- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .188 ± .002 CENTERS
 - 2 -COMMON AND NORMALLY OPEN TERMINALS ARE PLATED FOR SOLDERING
 - 3 - SWITCH WILL WITHSTAND TEMPERATURE OF 250° F
 - 4 CAUTION: NORMALLY CLOSED TERMINAL IS ELECTRICALLY CONDUCTIVE

RELEASE NO.	PR-17986-T
REPLACES	X91814-SX

CHARACTERISTICS	ELECTRICAL DATA		DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± ONE PLACE .X ± TWO PLACE .XX ± THREE PLACE .XXX ± FOUR PLACE .XXXX ± ANGLES ±	DRAWN	SPK	03DEC07	Honeywell			
	CONTACT ARRANGEMENT SPNO			CHECK	RJ	03DEC07				TITLE SWITCH - BASIC
28 VOLTS DC RATING		SEA LEVEL	50,000 FT	THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			SIZE	TYPE	DRAWING NAME	REV
INDUCTIVE	4 AMP	7 AMP	2.5 AMP				B	I	1SX90-T	6
RESISTIVE	7 AMP	7 AMP	7 AMP	INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY			SCALE	-	WEIGHT:	SHEET 1 OF 1
MAXIMUM INRUSH 24 AMP		THIRD ANGLE PROJECTION		RASTER						
APPROVALS	KEMA, CE	7A 250V~ T125 5E4	UL, CSA	7A 250 VAC						