

FO-55111-A

4

3

2

1

HONEYWELL
PART NUMBER


11SX98-T

PRODUCT CODE

VDJ2287

REV	DOCUMENT	CHANGED BY	CHECK
4	0038448	VS 28APR08	BLR

PLASTIC PLUNGER

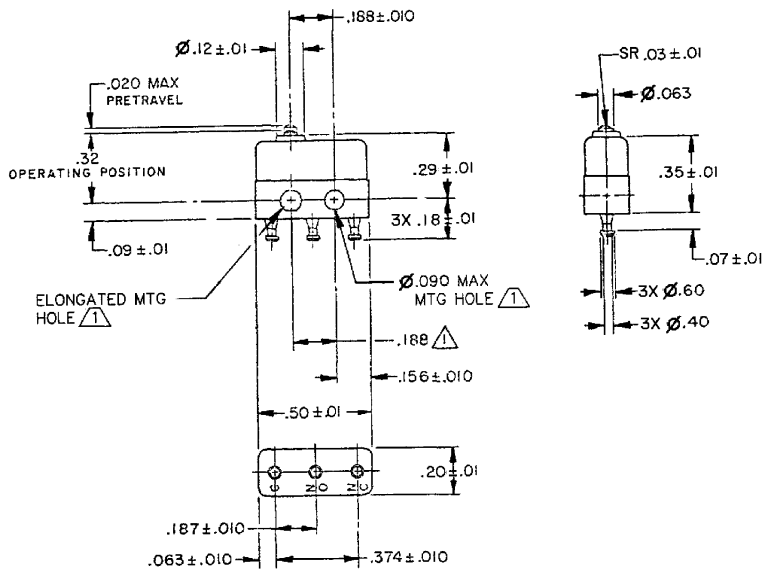

NOTES

- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF Ø.087 MAX ON .188 ± .002 CENTERS
2 - TERMINALS ARE PLATED FOR SOLDERING
3 - SWITCH WILL WITHSTAND TEMPERATURE OF 250° F

RELEASE NO. PR-23688
REPLACES

CHARACTERISTICS	ELECTRICAL DATA	DESIGN UNITS: INCH TOLERANCES UNLESS NOTED:	DRAWN CHECK	SPK RJ	12FEB08 12FEB08	Honeywell		
OPERATING FORCE - - - 3.5 OZ MAX	CONTACT ARRANGEMENT S P D T	NO PLACE .X ±	THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			TITLE		
RELEASE FORCE - - - .75 OZ MIN	28 VOLTS DC RATING	ONE PLACE .X ±				SWITCH - BASIC		
DIFFERENTIAL TRAVEL - - .001 MAX	INDUCTIVE 2 AMP -	TWO PLACE .XX ±				SIZE	TYPE	DRAWING NAME
OVERTRAVEL - - - .004 MIN	RESISTIVE 3 AMP -	THREE PLACE .XXX ±				B	I	11SX98-T
	APPROVALS	THIRD ANGLE PROJECTION	INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY			SCALE	WEIGHT: .003 LB MAX	REV 4
			RASTER				SHEET 1 OF 1	

4

3

2

1