
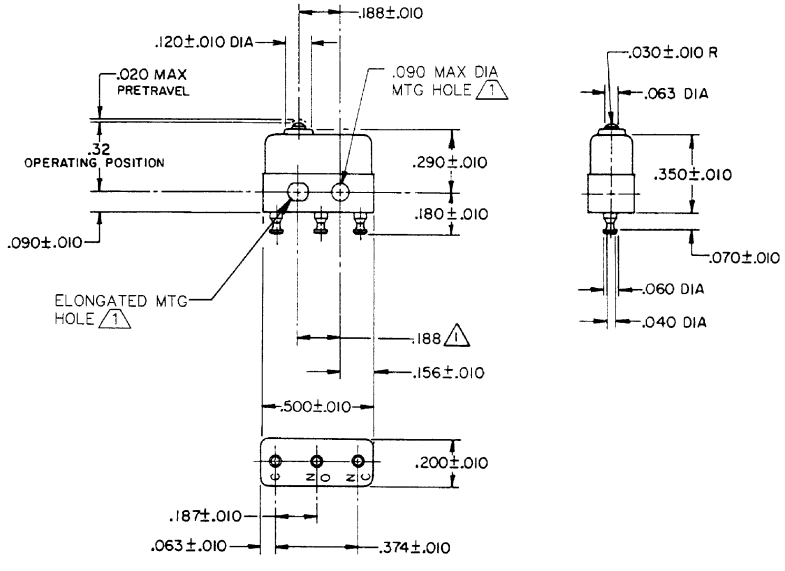


FO-55111-A

HONEYWELL
PART NUMBER
17SX21-T
PRODUCT CODE
VDK6000

REV	DOCUMENT	CHANGED BY	CHECK
8	0038449	VS 28APR08	BLR



- NOTES**
- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .188 ± .002 CENTERS
 - 2 - TERMINALS ARE PLATED FOR SOLDERING
 - 3 SWITCH WILL WITHSTAND TEMPERATURE OF 250°F

RELEASE NO. PR-5424
REPLACES

CHARACTERISTICS OPERATING FORCE - - - 2.5-5 OZ RELEASE FORCE - - - 1 OZ MIN DIFFERENTIAL TRAVEL - - .002 MAX OVERTRAVEL - - - .004 MIN	ELECTRICAL DATA CONTACT ARRANGEMENT S P D T 28 VOLTS DC RATING 115 VOLTS AC 60 CPS SEA LEVEL 50,000 FT SEA LEVEL INDUCTIVE 3 AMP 2 AMP 5 AMP RESISTIVE 5 AMP 4 AMP 5 AMP	DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE .X ± ONE PLACE .XX ± TWO PLACE .XXX ± THREE PLACE .XXXX ± ANGLES ±	DRAWN SPK 20FEB08 CHECK RJ 20FEB08	Honeywell TITLE SWITCH - BASIC
			THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL. INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY	
APPROVALS KEMA CE 5A 250 V - T125 5E4 UL CSA 5A 250 VAC		THIRD ANGLE PROJECTION	RASTER	

4

3

2

1